LEGEND:

Ⓒ PERMISSIBLE CONSTRUCTION JOINT. IF CONSTRUCTED IN THIS MANNER TIE BARS MUST BE USED.

Ⓓ #4 TIE BAR AT 24" CENTERS. LENGTH OF THE TIE BARS EQUALS THICKNESS OF PAVEMENT PLUS HEIGHT OF CURB, LESS 3".


Ⓟ TOP OF PAVEMENT OR CONCRETE BASE.

Ⓡ1 ROUND TO 1/2" RADIUS. (EXCEPT FOR SAWED JOINTS)

Ⓡ2 ROUND TO 1 1/2" RADIUS.

TYPE A INTEGRAL CURB

NOT TO SCALE

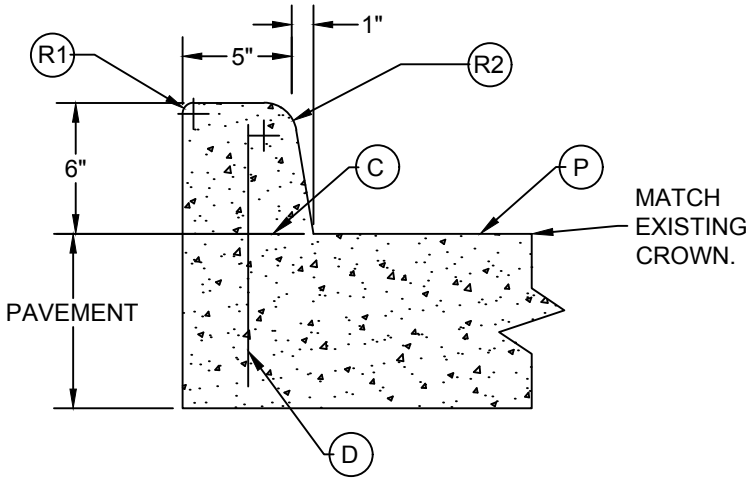


NOTES:

1. ALL POURED CONCRETE SHALL BE REINFORCED CLASS "B".
2. STEEL REINFORCEMENT IN PAVEMENT SLAB IS OPTIONAL.
3. BID PRICE FOR ALL CURB & PAVEMENT SHALL INCLUDE ALL EXCAVATION, LABOR, & MATERIALS REQUIRED TO CONSTRUCT CURB & PAVEMENT.

TYPE S CONCRETE CURB

NOT TO SCALE

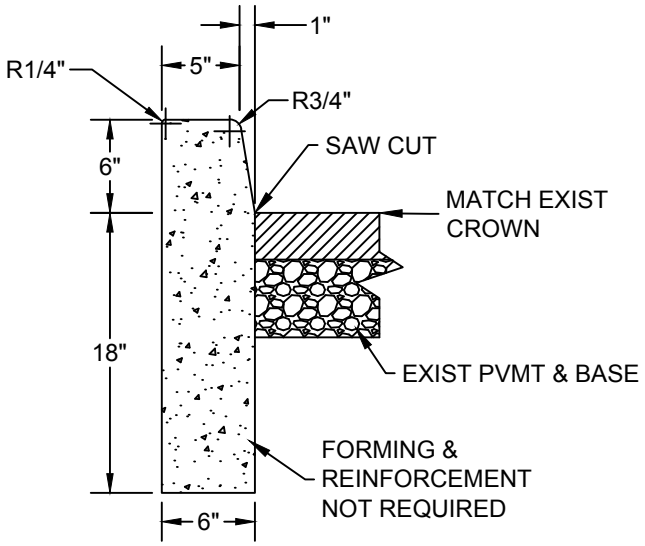

ST-05

CITY OF Joplin	CITY OF JOPLIN, MO	CKD BY: JOHNSON	PROJECT
	PUBLIC WORKS DEPT	DATE: 2/2019	TYPE "A" & TYPE "S" CURB
	ENGINEERING DIVISION	ENGINEER: HERTZBERG	
	602 S MAIN ST 64801	FILE: TYPEA&SCURB	