
VIRGINIA AVE

40 0 40

DWGS PRINTED ON 11"X17" PAPER ARE TO HALF SCALE.

TYPICAL SECTION
2 LANE W/ NO BIKE LANES
N.T.S.

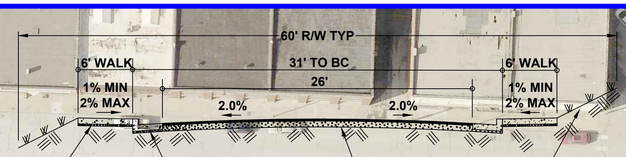

CLASS 'B' CONC SIDEWALK ON BOTH SIDES

STD 6" UPRIGHT C&G OVER 6" LIMESTONE BASE BOTH SIDES

2" ASPHALTIC CONC OVER 2" BLACK BASE OVER 8" LIMESTONE BASE

BACKSLOPE ON 4:1 SL MAX W/ 2" BLACK DIRT & SEED, MULCH, & FERTILIZE BOTH SIDES.

ASPHALT PRIMER SHALL BE APPLIED AT A RATE OF 0.25 GAL PER SQ YD.

7TH ST

COMMERCIAL ALLEY

ARTISTIC ALLEY

5TH ST

DEMOLISH EXISTING VIADUCT

INSTALL BOX CULVERT

BEGIN NEW 30' WIDE STREET ON GRADE

END NEW 30' WIDE STREET ON GRADE

PENNSYLVANIA AVE

PAGE 7 PROPERTIES
215 E 7TH ST

STEPHEN COOPER
215 E COMMERCIAL ALLEY

JOPLIN EMERGENCY MEDICAL SERVICES INC
625 VIRGINIA AVE

UNKNOWN OWNERSHIP

CITY OF JOPLIN
ARTISTIC ALLEY

CENTRAL ASSEMBLY OF JOPLIN, INC
501 VIRGINIA AVE

PAMELA IVEY
301 E 7TH ST

GREG & TAUNYA LESLEY
307 E 7TH ST

CGM INVESTMENTS INC
303 E COMMERCIAL ALLEY

CGM INVESTMENTS INC
S PENNSYLVANIA AVE

CITY OF JOPLIN
606 S KENTUCKY AVE

SAMMY BURKS JR
ARTISTIC ALLEY

ROBERT & TERRY WOOD
501 - 531 PENNSYLVANIA AVE

DEMOLISH EXISTING BUILDING

KENTUCKY AVE

PL

GENERAL NOTES:

1. CONTRACTOR SHALL, AT HIS EXPENSE, SET & MAINTAIN ALL LINE & GRADE STAKES.
2. CONTRACTOR SHALL GRADE ALL EXISTING STREETS, ALLEYS, & DRIVES TO MEET NEW CONSTRUCTION.
3. CONTRACTOR SHALL FIELD VERIFY ALL UTILITY LOCATIONS BEFORE BEGINNING NEW CONSTRUCTION.
4. ALL WORK SHALL CONFORM TO THE CITY OF JOPLIN STANDARD SPECIFICATIONS UNLESS OTHERWISE NOTED.
5. ALL WORK SHALL BE IN ACCORDANCE WITH THE WORK ZONE SAFETY GUIDELINES OF PART VI OF THE MUTCD & WITH THE BARRICADING SECTION OF THE CITY OF JOPLIN SAFETY MANUAL.
6. ALL PEDESTRIAN FACILITIES SHALL CONFORM TO THE APPLICABLE REQUIREMENTS OF THE ADA.
7. CONTRACTOR SHALL, AT HIS EXPENSE, PROVIDE ACCESS TO PRIVATE PROPERTY AT ALL TIMES.
8. CONTRACTOR SHALL, AT HIS EXPENSE, RETAIN THE SERVICES OF A PLS LICENSED IN MISSOURI, WHO SHALL BE RESPONSIBLE FOR RESTORING ANY INCIDENTALLY DAMAGED SURVEY MONUMENTS NOT SCHEDULED FOR REMOVAL AS PART OF PROJECT. CONTRACTOR SHALL NOTIFY THE CITY OF JOPLIN OF ANY MONUMENTS DAMAGED BY ANY OUTSIDE PARTY.

MISSOURI ONE CALL SYSTEM, INC. 800-344-7483 STOP - CALL BEFORE YOU DIG

CITY OF Joplin

CITY OF JOPLIN, MISSOURI
PUBLIC WORKS DEPARTMENT
DIVISION OF ENGINEERING

ADDRESS: 602 S MAIN ST 64801
PH NO: 417-624-0820
FAX NO: 417-625-4738
E-M: DHERTZBE@JOPLINMO.ORG

REV DATE:	REVISION:
08/16/2019	CREATED DWG

SVYD BY:	N/A
PNT FILE:	N/A
SVY DATE:	N/A
ENGINEER:	HERTZBERG

ACAD DWG FILE & PATH NAME: STREET \ PENN VIADUCT

SCALES: HORZ: 1" = 40' VERT: N/A

DWN BY:	STAFF
CKD BY:	JOHNSON
APD BY:	JOHNSON
DATE:	08/2019

PROJECT

CONCEPTUAL DRAWING OF PENNSYLVANIA VIADUCT DEMOLITION

PLAN NO: 0000

SHEET 1