CITY
OF
JOPLIN, MISSOURI

BID PACKAGE

2016-04

for

McIndoe Park
Trail Edge and
Parking Lot Edge Repairs

JOPLIN PARKS DEPARTMENT

3301 W. FIRST STREET
JOPLIN, MO 64801
(417) 625-4750

Notice to Contractors

Notice is hereby given that the Director of Parks and Recreation of the City of Joplin will accept sealed bids for repairing asphalt parking lots and trails at McIndoe Park located at south Jackson and Glendale Road in the City of Joplin.

McIndoe Park Trail Edge and Parking Lot Edge Repairs

A general description of the project is on file at the office of the Director of Parks and Recreation, 3301 West 1st, Joplin, MO 64801. Bids will be opened at 10:00 AM, Tuesday, May 31st 2016.

The wages rates applicable to this project have been predetermined as required by law and are set forth in the construction specifications and are to be considered as a part of this Notice to Contractors.

Payment for this project will be made to the contractor after final inspection and approval by The Director of Parks and Recreation.

The contractor will be required to have an approved Affirmative Action Program. Attention of bidders is particularly called to the requirement that an Affirmative Action Program must be adopted and approved by the Affirmative Action Committee of the City of Joplin before contracts can be executed.

Leslie Haase
Finance Director

Publication Date:05/13/2016

Scope of Work

To perform all tasks necessary for the edge repair of trails and parking lots as described (see attached drawing) at McIndoe Park in the City of Joplin, Mo.

This shall include all labor, material and equipment needed for parking lot and trail repairs.

This project involves the excavation along parking lot and trail edges, forming and placing concrete to prevent future erosion.

All work shall be done in a professional manner and all areas shall be made complete and useful.

Contractor is responsible for coordinating work and to see that all work is complete.

Contractor shall be responsible for the cost of all building permits, sales taxes and workmans compensation insurance.

Contractor shall have 60 days after receipt of purchase order to complete the project with a $100 per day penalty for each day after.

Special Provisions

Project: Parking lot and trail repairs (see attached drawing) at McIndoe Park, City of Joplin, Missouri.

1. Contractor must be licensed, bonded and insured with the City of Joplin.

2. Wage rates for this project shall be in accordance with wage rate determination made by the Industrial Commission of Missouri on file in the Public Works Department.

3. Contractors are cautioned that unbalanced bids can be rejected.

4. The City will issue a work order after the signing of the contract.

5. Contractors are responsible for excavation, forming, pouring concrete and installing topsoil and seed and straw mulch.

6. Contractor must have 5 years verifiable experience in the Joplin area and must provide references.

General Description and Specifications

The following specifications are minimum and any methods or materials that exceed these in quality will be acceptable. All items intended for acceptance as equivalents must be submitted and approved before they may be substituted.

1. Excavate (see attached drawing) and remove soil in eroded areas along trails. Eroded edges that are to be repaired shall be marked with paint by the owner prior to bid and shall not exceed 4,300 lineal feet. Remove loose asphalt along edges as needed. Form and pour concrete with 2 pieces of #4 rebar placed parallel to the trail edge. Trowel and broom finish concrete. Saw cut concrete control joints at 20 foot intervals ½ inch deep.

2. Install topsoil as shown on drawing. Over seed with 5 star fescue at recommended label rate and place straw mulch over seeded area.

3. Provide straight and uniform parking lot and trail edges.

4. Tree roots- minimize damage to tree roots by leaving them undisturbed when excavating. If roots are exposed, cover them with 1" expanded polystyrene foam to allow for expansion and then pour concrete. Adjust depth of excavation to minimize damage to roots.

5. Any traffic control needed will be the responsibility of the contractor.

6. The area where repairs are to be made starts at McIndoe boat launch ramp and extends upstream (southeast) to the Wildcat Park Spring walk bridge. The 5 parking lots and connecting walkways are included.

7. All inquiries about this project are to be done through the Parks Department. Contact Steve Curry at 417-625 4750. E-mail: scurry@joplinmo.org

Bid Sheet – McIndoe Park - Parking Lot Edge and Trail Edge Repair

Total _____


Contractor _____

By _____

Address_____

MARK BID ENVELOPES: 2016-04 McIndoe Park Parking Lot and Trail edge Repair- 10AM, May 31th 2016.

Mcindoe Park Trail

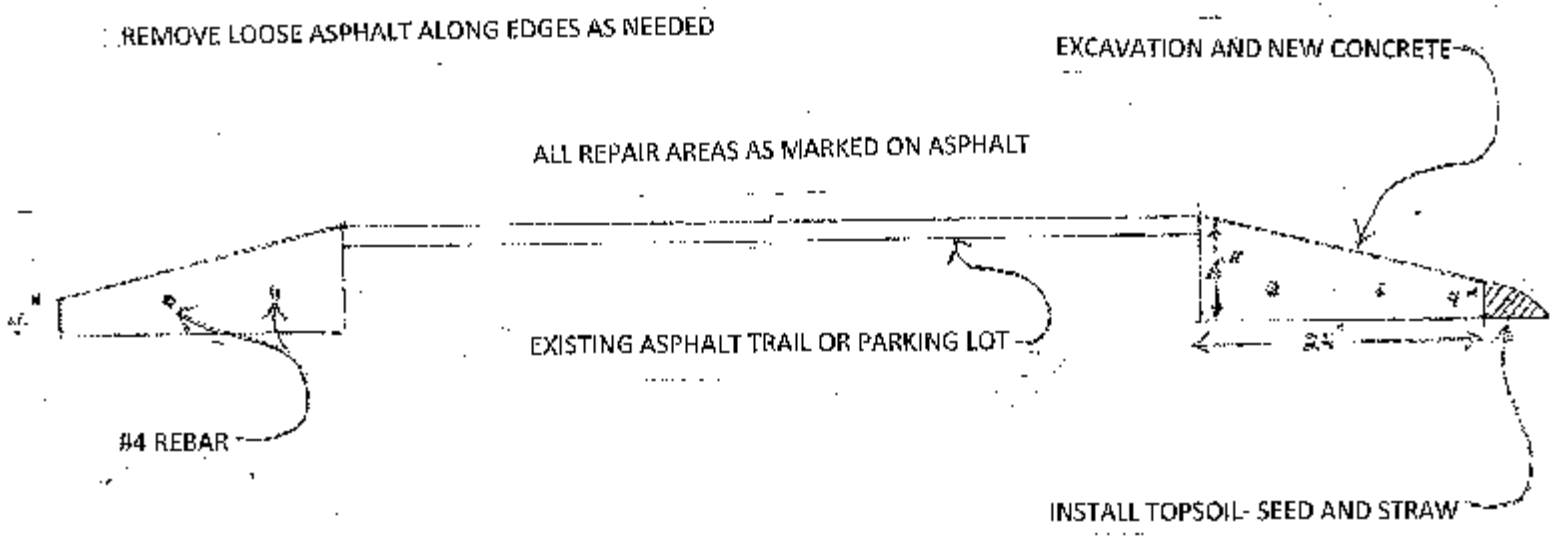

Unauthorized Aliens Workers Act

The successful bidder will have to sign an agreement that they are enrolled and participating a Federal Work Authorization Program ("FWAP") that ensures that all of its employees or agents or subcontractors have the legal right to work in the United States, as defined in 8 U.S.C. 1324a(h)(3) and RSMo § 285.525-285.555, and that it will maintain this compliance for the entire duration of its contract with the City of Joplin, and will provide an Affidavit of Compliance to the City stating the same.

AFFIDAVIT OF COMPLIANCE
(Missouri Unauthorized Alien Workers Act)

My name is _____ (name) _____ and I am the _____ (Title) _____ of _____ (Company Name) _____. I hereby represent, affirm and certify to the City of Joplin that my company does not knowingly employ any person who is an unauthorized alien in connection with contracted services with the City. I further affirm that my company is actively enrolled and participating in a federal work authorization program with respect to all employees working in connection with the contract services provided to the City.

_____
Affiant