Olsson
1027 S. Main Street,
Suite 503
Joplin, MO 64801
February 12, 2024

ADDENDUM NO. 3
Glendale Parallel Interceptor Improvements – Lower Reach
Joplin, MO – 2024
Bid Date/Time: February 21, 2024 at 10:00 AM
Olsson Project No. C17-0643

TO ALL WHO HAVE RECEIVED PLANS AND SPECIFICATIONS FOR THE REFERENCED PROJECT.

SCOPE

This Addendum covers the following additions, modifications, and clarifications to the Bid Manual and Drawings for the above-mentioned project scheduled to close 10:00 am CST, Wednesday, February 21, 2024.

FRONT-END DOCUMENTS

1. Refer to BID FORM.
   a. Revise Item A-3, 'Rover and Associated Equipment' quantity to 1 LS.
   b. Revise Item D-52, 'Flow Monitoring Equipment' per description below.

SPECIFICATIONS


1. Flow Monitoring Equipment (Southeast Diversion Structure)
   a. ~~Contractor to provide a sluice gate matching the attached submittal for the proposed 21" dia. Pipe.~~
   b. *Proposed 21" Pipe at downstream end of structure may be reduced to the existing 18" pipe to avoid replacement of the existing sluice gate and flow trough.*
   c. Contractor to provide revised spring ring and/or scissor ring for the installed velocity sensors.
   d. Work shall include installation into the new pipe/ structure and relocation of equipment found during construction.
   e. *Upstream pipe to be connected through the existing structure wall and flow trough may require a grout transition.*

CLARIFICATIONS

   a. Alternate Pipe Materials: Pipe Diameter increases that results in a change to the proposed structure in accordance with Section 4300 will be at the option of the Bidder with no costs incurred by the City of Joplin.

Each Bidder must acknowledge receipt of all addenda in the space provided on the Bid Form.

F:\2017\0501-1000\017-0642-C\50-BIDDING\ADDENDUM\ADDENDUM 2 GLENDALE LOWER\ADDENDUM 3 GLENDALE LOWER.DOCX

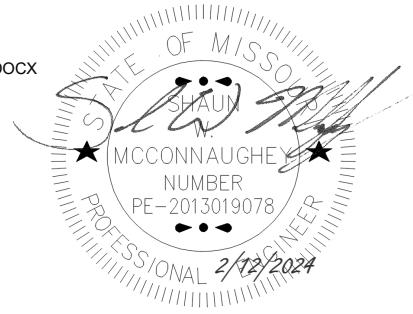

REVISED BID FORM

ITEM DESCRIPTION			QTY	UNIT	UNIT COST	COST
SCHEDULE A - GENERAL (BASE BID)						
A	1	MOBILIZATION	LS	1		$
A	2	CONTRACTOR CONSTRUCTION STAKING	LS	1		$
A	3	ROVER AND ASSOCIATED EQUIPMENT	LS	1		$
A	4	ALL OTHER ITEMS NECESSARY FOR THE PERFECTION OF THE WORK	LS	1		$
SCHEDULE B - DEMOLITION (BASE BID)						
B	1	CLEARING AND GRUBBING	LS	1		$
B	2	BRANCH EASEMENT CLEARING (20' WIDE)	LF	1,200		$
B	3	REMOVAL OF IMPROVEMENTS	LS	1		$
B	4	PAVEMENT REMOVAL	SY	1,610		$
B	5	SAW CUT	LF	1,400		$
SCHEDULE C - EROSION CONTROL (BASE BID)						
C	1	EROSION & SEDIMENT CONTROL	LS	1		$
C	2	SEEDING, FERTALIZING & MULCHING	LS	1		$
SCHEDULE D - SANITARY SEWER (BASE BID)						
D	1	JACK AND BORE UNDER STREETS (28" DIA.)	LF	250		$
D	2	JACK AND BORE UNDER STREETS (30" DIA.)	LF	60		$
36" DIA. DEEP PIPE						
D	3	0'-6' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	40		$
D	4	6'-8' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	160		$
D	5	8'-10' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	150		$
D	6	10'-12 DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	100		$
D	7	12'-14' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	30		$
30" DIA. DEEP PIPE						
D	8	0'-6' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	300		$
D	9	6'-8' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	138		$
D	10	10'-12 DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	91		$
D	11	12'-14' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	194		$
D	12	14' PLUS DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	136		$
21" DIA. DEEP PIPE						
D	13	0'-6' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	2,299		$
D	14	6'-8' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	1,284		$
D	15	8'-10' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	286		$
D	16	10'-12 DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	31		$
D	17	12'-14' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	36		$

REVISED BID FORM

ITEM DESCRIPTION			QTY	UNIT	UNIT COST	COST
18" DIA. DEEP PIPE						
D	18	0'-6' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	890		$
D	19	6'-8' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	1,568		$
D	20	8'-10' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	574		$
D	21	10'-12 DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	79		$
D	22	12'-14' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	23		$
D	23	14' PLUS DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	193		$
10" DIA. DEEP PIPE						
D	24	0'-6' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	4		$
8" DIA. DEEP PIPE						
D	25	0'-6' DEEP TRENCH & BACKFILL GRAVITY SEWER PIPE	LF	6		$
D	26	ROCK EXCAVATION	CY	1,500		$
D	27	TYPE 1, 60" DIA. MANHOLE	EA	29		$
D	28	TYPE 1, 60" DIA. MANHOLE EXTRA DEPTH	VF	54		$
D	29	TYPE 1, 60" EXTERNAL DROP MANHOLE	EA	1		$
D	30	TYPE 1, 48" DIA. MANHOLE	EA	12		$
D	31	TYPE 1, 48" DIA. MANHOLE EXTRA DEPTH	VF	40		$
D	32	28" DR 11 HDPE CASING PIPE	LF	246		$
D	33	30" DR 11 HDPE CASING PIPE	LF	60		$
D	34	CONCRETE ENCASEMENT	LF	275		$
D	35	36" DIA. PS46 PVC GRAVITY SEWER PIPE AND BEDDING	LF	461		$
D	36	30" DIA. PS46 PVC GRAVITY SEWER PIPE AND BEDDING	LF	859		$
D	37	21" DIA. PS46 PVC GRAVITY SEWER PIPE AND BEDDING	LF	3,936		$
D	38	18" DIA. PS46 PVC GRAVITY SEWER PIPE AND BEDDING	LF	3,327		$
D	39	10" DIA. SDR 26 PVC GRAVITY SEWER PIPE AND BEDDING	LF	4		$
D	40	8" DIA. SDR 26 PVC GRAVITY SEWER PIPE AND BEDDING	LF	6		$
D	41	HYDROSTATIC TESTING OF TYPE 1, 48" DIA. MANHOLES	EA	20		$
D	42	HYDROSTATIC TESTING OF TYPE 1, 60" DIA. MANHOLES	EA	30		$
D	43	ABANDONMENT OF 48" MANHOLES UNDER TURF	EA	7		$
D	44	ABANDONMENT OF 48" MANHOLES UNDER PAVEMENT	EA	3		$
D	45	RECONNECTION OF EXISTING 4" DIA. SEWER SERVICE LAT. LINE	EA	2		$
D	46	RECONNECTION OF EXISTING 8" DIA. SEWER LINE	EA	12		$
D	47	RECONNECTION OF EXISTING 10" DIA. SEWER LINE	EA	5		$
D	48	RECONNECTION OF EXISTING 15" DIA. SEWER LINE	EA	3		$
D	49	RECONNECTION OF EXISTING 18" DIA. SEWER LINE	EA	4		$
D	50	RECONNECTION OF EXISTING 21" DIA. SEWER LINE	EA	1		$
D	51	RECONNECTION TO EXISTING STRUCTURE	EA	6		$
D	52	FLOW MONITORING EQUIPMENT	LS	1		$

REVISED BID FORM

ITEM DESCRIPTION			QTY	UNIT	UNIT COST	COST
SCHEDULE E - PAVEMENT (BASE BID)						
E	1	ASPHALT PAVEMENT REPAIR & REPLACEMENT	SY	1,700		$
E	2	ASPHALT PAVEMENT OVERLAY	SY	120		$
SCHEDULE F - TRAFFIC CONTROL (BASE BID)						
F	1	LOCAL TRAFFIC CONTROL (INCLUDING INCIDENTAL LANE DROPS)	LS	1		$
F	2	MODOT TRAFFIC CONTROL (INCLUDING INCIDENTAL LANE DROPS)	DAYS	15		$

Total Base Bid

($ _____) ($ _____)

(Write Out In Words) (Figures)

ITEM DESCRIPTION			QTY	UNIT	UNIT COST	COST
SCHEDULE A1 - JACKSON AVE. ENTRANCES (ALTERNATE 1)						
A1	1	CRUSHED STONE PAVEMENT REPAIR & REPLACMENT	LF	112		$
A1	2	SMOOTH STRAND WIRE FENCE	LF	204		$
A1	3	12' GATES	EA	6		$

Total Alternate Bid

($ _____) ($ _____)

(Write Out In Words) (Figures)