DESIGNWORKSHOP
Landscape Architecture
Planning
Urban Design

120 E. Main St.
Aspen, CO 81611
970-925-8354
970-920-1387 fax

www.designworkshop.com

ADDENDUM NO. 3

Project:	New Joplin Library
	Site Landscape Construction Documents
	Volume 2 of 2
Cliet:	City of Joplin
EDA PROJECT#:	05-79-05345
Date:	November 20, 2015
Subject:	Landscape Architecture Addendum No. 3

This document shall modify the drawings and specifications for volume 2 of 2 requirements as herein noted. This addendum, however, shall not relieve the General Contractor or his sub-contractors of any responsibility under the plans or specifications except as amended herein. Please regularly check the City of Joplin, Tri-State Engineering, and USA Print (417) 626-0966 for additional information.

RESPONSE TO RFI #5 – DEWITT AND ASSOCIATES:

1. Referring to sheet L7-04, detail 1 calls out keynote 4.8, this keynote was not provided in the schedule. Please advise what keynote 4.8 is to be.

This should be 4.7 for the two instances on this sheet where this occurs.

---

2. Referring to Anchored Stone Masonry Veneer -Section 32-044313.13, 1.3, A. – specification directs contractors to 044300 Masonry specifications – There is no 044300 available. Please advise.

This was provided for coordination purposes. The contractor does not need to reference 044300. This note should be removed from the specification.

---

5. Referring to Sheet L7-05 – Will there be a specification issued for the precast cap as detailed on sheet L7-05/1 in wall type - 4.1 ?

This was released in addendum #2 – under precast architectural concrete specifications.

---

6. Referring to Anchored Stone Masonry Veneer 32-044313.13- 3, item E says to provide asphalt dampproofing for concrete and masonry backup. Spec. section 071113 does not say to waterproof these areas. Please advise the damppoofing is required.

Yes damp proofing is required for all concrete and masonry backup walls depicted on the Volume 2 drawings below grade and to 12" above finished grade. This clarification is in relationship only to Volume 2 of the set. All drawings, specifications, and clarification for Volume 1 still apply or should be confirmed through SAPP Design Architects.


CONTRACTOR OPTION PROVISION:

Relating to Volume 2 of 2 – Sheet L7-14 – Detail 2 Fence Type 2 Eastern Site Border

It has been brought to the design team's teams attention that 11" wide x 1" thick composite material is difficult to source. The following drawing depicts a contractor's option to bid either Option 1 as depicted in the drawings set or the attached drawing (Option 2).

The 11" panel has been eliminated and replaced with (2) 5" panels for each occurrence. This change does not require in any way that the contractors must bid or construct this new option is simply offers the opportunity if desired. The contractors are not required to specify which option they are bidding at this time.

** SEE DRAWING FOLLOWING PAGE.*

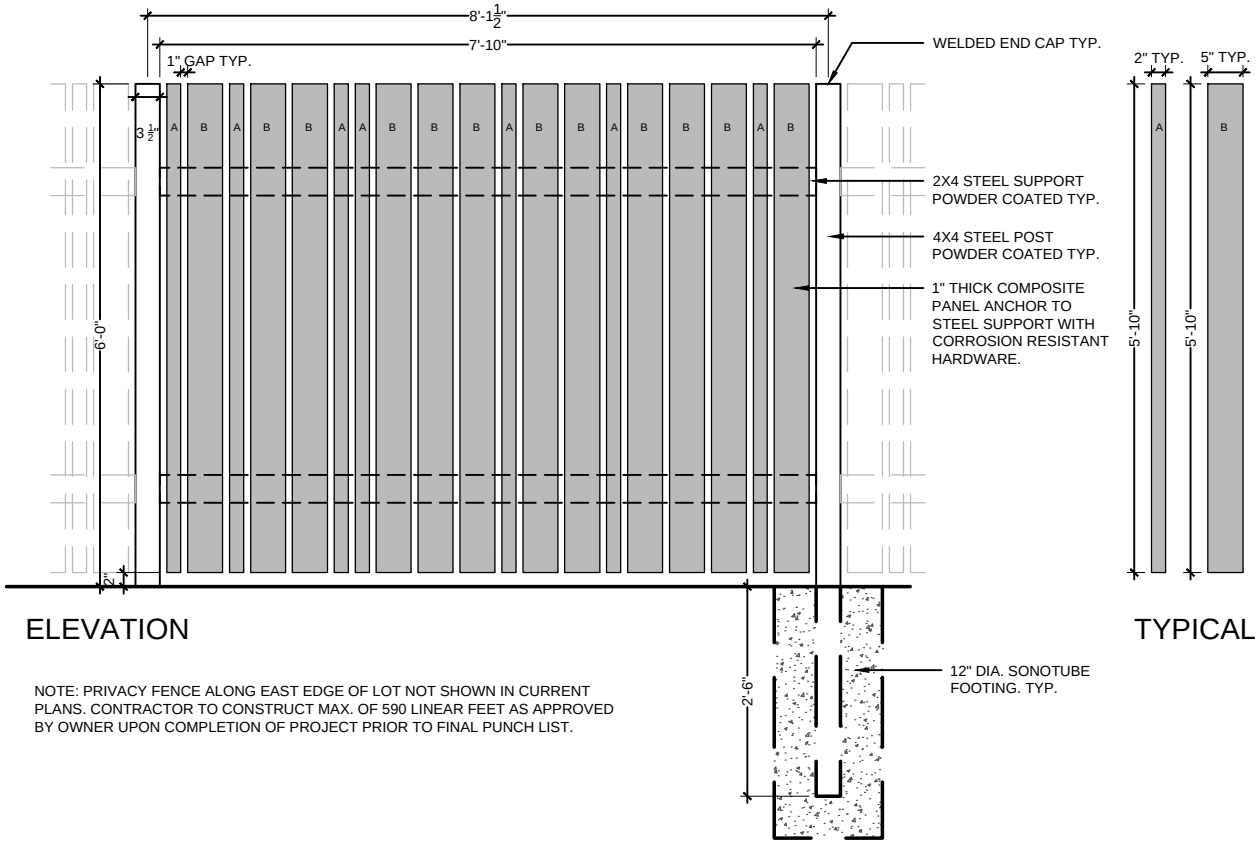

ELEVATION

TYPICAL PANELS

NOTE: PRIVACY FENCE ALONG EAST EDGE OF LOT NOT SHOWN IN CURRENT PLANS. CONTRACTOR TO CONSTRUCT MAX. OF 590 LINEAR FEET AS APPROVED BY OWNER UPON COMPLETION OF PROJECT PRIOR TO FINAL PUNCH LIST.

DESIGNWORKSHOP

120 East Main Street
Aspen, Colorado 81611-1787
(970)-925-8354
Facsimile (970) 920-1387

NEW JOPLIN PUBLIC LIBRARY

CITY OF JOPLIN / Joplin, MO.

FENCE TYPE 2 EASTERN SITE BORDER (Contractor Option)

Drawn/Checked		Proj. Num.	Date	Sheet	Scale
AM	KC	5306	11/20/2015	1 OF1	NTS.

Comment:

11" x 1" thick composit material was eliminated from previous design in this option. Contractors may elect to omit "panel size C" in original detail design and replace ea. "C panel" with (2) "panel size B" components as shown in this option.

END OF ADDENDUM #3
Kurt Culbertson PLA.

Design Workshop Inc.
120 East Main Street
Aspen, CO. 81611

