
NEW SIDEWALK IMPROVEMENTS
FOR THE CITY OF JOPLIN JUSTICE CENTER
LOCATED AT 303 E. 3RD STREET JOPLIN, MO. 64801



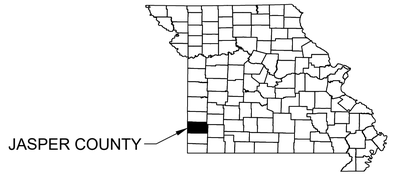

MISSOURI ONE CALL SYSTEM, INC.
1-800-344-7483
STOP CALL BEFORE YOU DIG!

Justice Center Sidewalk Improvements.dwg

JOPLIN MISSOURI	CITY OF JOPLIN, MISSOURI PUBLIC WORKS DEPARTMENT DIVISION OF ENGINEERING	ADDRESS: 602 S MAIN ST 64801 PH NO: 417-624-0820 EXT 1530 FAX NO: 417-625-4738 E-MAIL: DJOHNSO1@JOPLINMO.ORG	REV DATE: 00/2025	REVISION: PROJECT CHECK	SVYD BY: N/A PNT FILE: N/A.TXT SVY DATE: N/A ENGINEER: JOHNSON	ACAD DWG FILE & PATH NAME: STREET\JUSTICE CENTER SCALES: HORZ: NTS VERT: NTS	DWN BY: CPRINGLE CKD BY: JOHNSON APD BY: JOHNSON DATE: 06/2025	PROJECT NEW SIDEWALK IMPROVEMENTS FOR CITY OF JOPLIN JUSTICE CENTER	PLAN NO: 8548 SHEET 1 of 2

Justice Center Sidewalk Imrovements.dwg

S. VIRGINIA AVE.

EXIST. ISLAND AND (1) TREE TO BE REMOVED AND PUT BACK AS 8" FIBER REINFORCED CONC. PAVEMENT APPROXIMATELY 48 SQ. YDS AND INSTALL 43 L.F. OF CURB AND GUTTER CURB IS TO BE PAINTED TRAFFIC YELLOW 43 L.F.

2.00

10.00

REMOVE MARKINGS AT LAST 3 PARKING STALLS AND CREATE 3 NEW STALLS AS SHOWN MATCH EXISTING STALL DEPTH

PAINT CURB ONLY "TRAFFIC RED" BEGINNING NORTH SIDE OF ADA LANDING TO BUILDING 107 L.F.

TYPE "B" ADA RAMP SEE C.O.J. STANDARD DETAILS APPROXIMATELY 39 SQ. YDS AND 39 LF OF CURB AND GUTTER

PAINT CURB ONLY "TRAFFIC YELLOW" BEGINNING SOUTH SIDE OF ADA LANDING TO ADA LANDING SOUTH 134 L.F.

STOP REMOVAL AND REPLACEMENT OF EXISTING SIDEWALK AT NEWER JOINT AS SHOWN

CONTRACTOR IS TO INSTALL EXPANSION JOINT AT THE BUILDING IN THESE 3 LOCATIONS THIS SHOULD BE INCLUDED IN THE PRICE OF THE 6" SIDEWALK

NOTE:
CONTRACTOR IS TO FIELD VERIFY THAT THE SIDEWALK IS 10'-0" WIDE PRIOR TO ORDERING MATERIAL AT THIS LOCATION.

2'-0" x 10'-0" x ¼" DIAMOND STEEL PLATE REQD. FOR COVER ABOVE TRENCH DRAIN

2'-0 ¼" OPNG.

(2) 3 x 3 x ⅜" STEEL ANGLES 10'-0" IN LENGTH EA. SIDE W/ 1/2" HEADED STUDS 2" MIN. SPACED EVENLY AT 1'-6" o/c BEGINNING IN THE CENTER

6" FIBER REINFORCED CONC. SIDEWALK SEE COJ STANDARD DETAILS

DETAIL 1S2
¾" = 1'-0"

3 FLAG POLE BASES AND (1) DRAIN THIS LOCATION (FIELD VERIFY)

SIDEWALK IN THIS LOCATION IS LOCATED OVER A MECHANICAL ROOM (FIELD VERIFY)

TYPE "D" ADA RAMP SEE C.O.J. STANDARD DETAILS APPROXIMATELY 35 SQ. YDS AND 46 L.F. OF CURB AND GUTTER

PAINT CURB ONLY "TRAFFIC YELLOW" BEGINNING EAST SIDE OF ADA LANDING TO EAST SIDE OF SIDEWALK AT THE EMPLOYEE ENTRANCE 170 L.F.

RETAINING WALL DRAINAGE CONTRACTOR TO INSTALL ¼" DIAMOND STEEL PLATE AT 2' IN WIDTH FLUSH WITH NEW SIDEWALK. CONTRACTOR IS TO ENSURE DRAINAGE TO ROAD BENEATH STEEL PLATE SEE DETAIL 1S2 (FIELD VERIFY)

CONTRACTOR IS TO POUR AROUND EXISTING STRUCTURE AND IS TO PROVIDE CONTROL JOINTS AT RE-ENTRANT CORNERS TO PREVENT SLAB FROM CRACKING (EVALUATE EXISTING SLAB CRACKING)

CONTRACTOR IS TO LEAVE EXISTING ADA RAMP IN PLACE

S. PENNSYLVANIA AVE.

CONTRACTOR IS TO MOVE NO PARKING SIGN SOUTH TO GREEN SPACE THIS LOCATION

CONTRACTOR IS TO REMOVE CONNECTING SLAB

START AT NEWER SIDEWALK AND GO EAST APPROXIMATELY 201 L.F. AS SHOWN

E. 3RD ST.

GRAPHIC SCALE
0 10 20 40
(IN FEET)
1 INCH = 20 FEET

GENERAL NOTES:

1. CONTRACTOR SHALL, AT HIS EXPENSE, SET & MAINTAIN ALL LINE & GRADE STAKES.
2. CONTRACTOR SHALL GRADE ALL EXISTING STREETS, ALLEYS, & DRIVES TO MEET NEW CONST.
3. CONTRACTOR SHALL FIELD VERIFY ALL UTILITY LOCATIONS BEFORE BEGINNING NEW CONST.
4. ALL WORK SHALL CONFORM TO THE CITY OF JOPLIN STD SPECS UNLESS OTHERWISE NOTED.
5. ALL WORK SHALL BE IN ACCORDANCE WITH THE WORK ZONE SAFETY GUIDELINES OF PART VI OF THE MUTCD & WITH THE BARRICADING SECTION OF THE CITY OF JOPLIN SAFETY MANUAL.
6. ALL PEDESTRIAN FACILITIES SHALL CONFORM TO THE APPLICABLE REQUIREMENTS OF THE ADA.
7. CONTRACTOR SHALL, AT HIS EXPENSE, PROVIDE ACCESS TO PRIVATE PROPERTY AT ALL TIMES.
8. CONTRACTOR SHALL, AT HIS EXPENSE, RETAIN THE SERVICES OF A PLS LICENSED IN MISSOURI, WHO SHALL BE RESPONSIBLE FOR RESTORING ANY INCIDENTALLY DAMAGED SURVEY MONUMENTS NOT SCHEDULED FOR REMOVAL AS PART OF CONST PROJECT. CONTRACTOR SHALL NOTIFY THE CITY OF JOPLIN OF ANY MONUMENTS DAMAGED BY ANY OUTSIDE PARTY.

MISSOURI ONE CALL SYSTEM, INC. 1-800-344-7483 STOP CALL BEFORE YOU DIG!

JOPLIN MISSOURI

CITY OF JOPLIN, MISSOURI
PUBLIC WORKS DEPARTMENT
DIVISION OF ENGINEERING

ADDRESS: 602 S MAIN ST 64801
PH NO: 417-624-0820 EXT 1530
FAX NO: 417-625-4738
E-MAIL: DJOHNSO1@JOPLINMO.ORG

REV DATE:	REVISION:
00/2025	PROJECT CHECK

SVYD BY: N/A
PNT FILE: N/A.TXT
SVY DATE: N/A
ENGINEER: JOHNSON

ACAD DWG FILE & PATH NAME: STREET\JUSTICE CENTER
SCALES: HORZ: 1" = 20' VERT: N/A

DWN BY: CPRINGLE
CKD BY: JOHNSON
APD BY: JOHNSON
DATE: 06/2025

PROJECT
NEW SIDEWALK IMPROVEMENTS FOR CITY OF JOPLIN JUSTICE CENTER

PLAN NO: 8548
SHEET
2 of 2