CITY OF JOPLIN, MISSOURI

BID PROPOSAL SUMMARY

Description of Item: SUPPLIER for Wayfinding Projects throughout the City of Joplin

BID PROJECT #1:

Materials/Manufacturing $2,300.00.

Installation $3,035.00

Once the contract is awarded, this project could be completed in 25 business days.

BID PROJECT #2:

Materials/Manufacturing $6,081.00.

Installation $2,720.00

Once the contract is awarded, this project could be completed in 25 business days.

BID PROJECT #3:

Materials/Manufacturing $8,575.00.

Installation $7,760.00

Once the contract is awarded, this project could be completed in 25 business days.

COMPANY NAME: Springfield Sign

CONTACT PERSON: Mike Dardis

EMAIL ADDRESS: michaeld@springfieldsign.com

PHONE NUMBER: Cell: 208-738-6062

ADDRESS: 4825 E Kearney St. Springfield, MO 65803

Signature of Company Representative: Mike Dardis

Date: 06.19.2024

MARK BID ENVELOPES: "BID 2024-RFP-15 WAYFINDING PROJECTS, BY NOON, THURSDAY, JUNE 20, 2024"

SPRINGFIELD SIGN

ADDRESS

CONTACT US

To whom it may concern,

The bid summary is included along with a breakdown for each project (project quotes). A few items to note...

Project 2: As noted on our quote, we are proposing to apply ACM panel overlays onto the existing panels. Our concern is that the existing retroreflective vinyl has a slight grain texture to it, and if we apply vinyl over it, this may cause ghosting (show through) and or have a wavy effect when looking at it from an angle. With the new vinyl applied to ACM we will avoid any of these issues.

Project 3: A drawing is attached to show the basic black (powder coated) posts to be used. We can certainly provide a more ornate post if desired. Likewise, we are proposing to set the posts at 10' overall height, which can also be adjusted if needed. City to confirm sign locations and setbacks.

We completed a similar sign project for the Village of Fremont Hills and installed 80+ signs.

Our product warranty is five years. Per 3M the vinyl degradation (retained luminance) is 80% at 7 years depending on the position of the sign relative to the sun, weather, etc.

Please let me know if you have any questions or need additional information. We appreciate the opportunity.

Thank you,

Mike

SPRINGFIELD SIGN

Mike Dardis / Sr. Manager of Business Development
michaeld@springfieldsign.com **Cell: 208-738-6062**

Springfield Sign, NWA Division
Office: 417.862.2454
1721 Acorn Dr. Little Flock, AR 72756-6805
Springfield Sign

SPRINGFIELDSIGN

SPRINGFIELDSIGN

Date 6/19/2024
Estimate # 100

Springfield Sign

4825 E Kearney St
Springfield, MO 65803
Phone: 800-845-9927

Quotation for:

Project #1
City Wayfinding
Joplin, MO

BUILDING IMAGES THAT BUILD BUSINESS

#	QTY	Product or Service	Unit Price	Total
1	3	40" x 54" .125 aluminum composite single sided sign panels with retroreflective vinyl graphics per city design.	$315.00	$945.00
2	1	40" x 32" .125 aluminum composite single sided sign panels with retroreflective vinyl graphics per city design.	$215.00	$215.00
3	1	40" x 42" .125 aluminum composite single sided sign panels with retroreflective vinyl graphics per city design.	$235.00	$235.00
4	1	40" x 23" .125 aluminum composite single sided sign panels with retroreflective vinyl graphics per city design.	$195.00	$195.00
5	2	40" x 23" .125 aluminum composite double sided sign panels with retroreflective vinyl graphics per city design.	$295.00	$590.00
6	4	Concrete	$20.00	$80.00
7	1	Miscellaneous Hardware	$40.00	$40.00
8	1	5 year product warranty		
9	1	Complete in 25 business days		
10				
11	2	City to provide posts (2 sets) that are in storage for the two new double sided signs		

Replace outdated Signs. Metal fabrication using new design (city to provide artwork), vinyl and installation. Project #1 equals ten signs at eight locations, with two double-sided. City to provide locations and setbacks for new signs. Tax exempt.

Product Total:	$2,300.00
Survey/Patterns:	$500.00
Setting Footings:	$550.00
Installation:	$1,985.00
Installation Total:	$3,035.00
Total:	$5,335.00

Customer Name:_____ Company:_____

Customer Signature:_____ Date:_____

THANK YOU FOR CHOOSING SPRINGFIELD SIGN! WE APPRECIATE THE OPPORTUNITY TO SERVE YOU. IF YOU HAVE ANY QUESTIONS, PLEASE CONTACT MIKE DARDIS AT 208.738.6062 OR MICHAELD@SPRINGFIELDSIGN.COM

SPRINGFIELD SIGN

SPRINGFIELDSIGN

Date 6/19/2024
Estimate # 101

Springfield Sign

4825 E Kearney St
Springfield, MO 65803
Phone: 800-845-9927

Quotation for:

Project #2
City Wayfinding
Joplin, MO

BUILDING IMAGES THAT BUILD BUSINESS

#	QTY	Product or Service	Unit Price	Total
1	8	40" x 32" ACM single sided sign panels with retroreflective vinyl graphics per city design.	$215.00	$1,720.00
2	11	40" x 42" ACM single sided sign panels with retroreflective vinyl graphics per city design. *Two of the panels to be applied to one D/S sign.	$235.00	$2,585.00
3	8	40" x 23" ACM single sided sign panels with retroreflective vinyl graphics per city design. *Two of the panels to be applied to one D/S sign.	$195.00	$1,560.00
4	27	Adhesive	$8.00	$216.00
5	1	5 year product warranty		
6	1	Complete in 25 business days		
7				
8				
9				
10				

Correct font issue. Apply overlay to existing signs (city to provide artwork). Project #2 equals 27 signs at 25 locations, with one double-sided. PLEASE NOTE: We are proposing to overlay the existing .125 panels with new ACM panels with applied graphics to avoid ghosting and or a rippling affect by only overlaying with vinyl. The ACM panels will be attached with permanent adhesive. Tax exempt.

Product Total:	$6,081.00
Survey/Patterns:	$500.00
Setting Footings:	$0.00
Installation:	$2,220.00
Installation Total:	$2,720.00
Total:	$8,801.00

Customer Name:_____ Company:_____

Customer Signature:_____ Date:_____

THANK YOU FOR CHOOSING SPRINGFIELD SIGN! WE APPRECIATE THE OPPORTUNITY TO SERVE YOU. IF YOU HAVE ANY QUESTIONS, PLEASE CONTACT MIKE DARDIS AT 208.738.6062 OR MICHAELD@SPRINGFIELDSIGN.COM

SPRINGFIELD SIGN

SPRINGFIELDSIGN

Date 6/19/2024
Estimate # 101

Springfield Sign

4825 E Kearney St
Springfield, MO 65803
Phone: 800-845-9927

Quotation for:

Project #3
City Wayfinding
Joplin, MO

BUILDING IMAGES THAT BUILD BUSINESS

#	QTY	Product or Service	Unit Price	Total
1	19	40" x 32" .125 aluminum composite, single sided sign panels with retroreflective vinyl graphics per city design. *3 signs are double sided (two panels each).	$215.00	$4,085.00
2	19	12' (10' overall mounting height) 2 3/8" round black (powder coated) 16 gauge galvanized steel posts.	$185.00	$3,515.00
	19	2 3/8" round galvanized steel post caps powder coated black.	$10.00	$190.00
3	32	Sets of black (powder coated) galvanized steel hardware brackets for single sided signs	$19.95	$638.40
4	6	Sets of black (powder coated) galvanized steel hardware brackets for double sided signs	$24.50	$147.00
5	1	5 year product warranty		
6	1	Complete in 25 business days		
7				
8				
9				
10				

NEW ADDITION (GRAND FALLS WAYFINDING)
Metal fabrication with the new design (city to provide artwork), vinyl; to include installation -- to include posts and hardware. Project #3 equals 19 signs at 16 sign locations, with three double-sided. City to provide locations and setbacks for new signs. Tax exempt.

Product Total:	$8,575.40
Survey/Marking:	$500.00
Setting Footings:	$3,500.00
Installation:	$3,760.00
Installation Total:	$7,760.00
Total:	$16,335.40

Customer Name:_____ Company:_____

Customer Signature:_____ Date:_____

THANK YOU FOR CHOOSING SPRINGFIELD SIGN! WE APPRECIATE THE OPPORTUNITY TO SERVE YOU. IF YOU HAVE ANY QUESTIONS, PLEASE CONTACT MIKE DARDIS AT 208.738.6062 OR MICHAELD@SPRINGFIELDSIGN.COM

S/F POST & PANEL

SALES: MIKE DARDIS | 800.845.9927 | CLIENT: CITY OF JOPLIN | # 2019 | DRAWING #: ao53595_1
ARTIST: D. MADDEN | CREATED: 9e/10/24 | LOCATION: JOPLIN, MO | REV DATE: 00/00/00 | REV: 0 ##

02

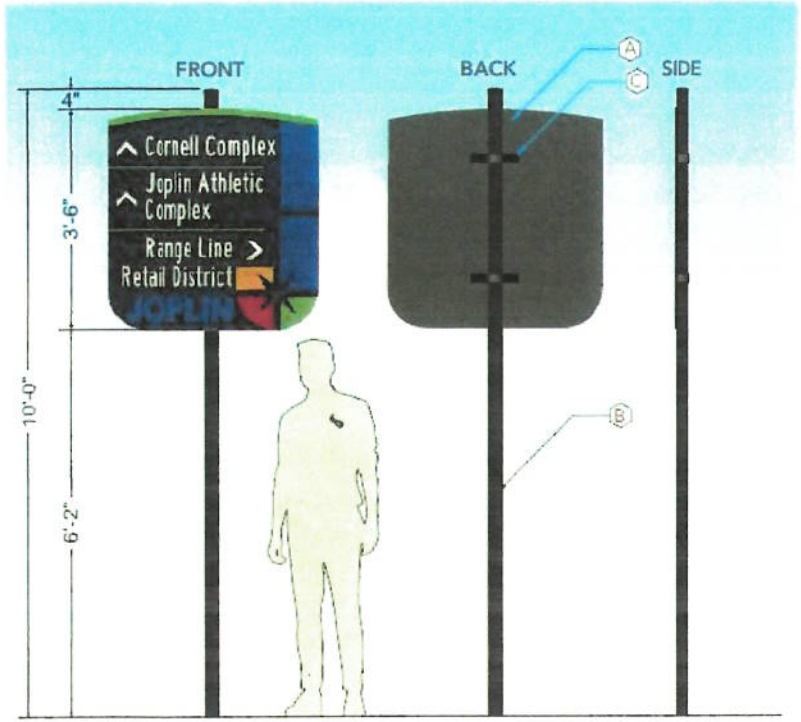

1 PROPOSAL
SCALE: 1/2" = 1'

MAIN - NORTHBOUND AT 20TH ST.

VECTOR ART NEEDED

ARTWORK IS RASTERED, NOT VECTOR
CANNOT EDIT WITHOUT REDRAW



FONTS APPEAR TO BE OUTSIDE BRAND STANDARDS

SIGN SCALED NATURALLY DIFFERS FROM CUSTOMER DIMENSIONS OF 40" WIDE

2 DETAIL VIEW
SCALE: 1" = 1'





3 MATERIALS
NO SCALE

DETAILS.

A - S/F 1/8" ALUMINUM SIGN PANEL
- 3M REFLECTIVE VINYL GRAPHICS

B - 2-3/8" 16 GAUGE STEEL POST & CAP
- POWDER COATED BLACK

C - SINGLE PANEL MOUNTING BRACKETS

D/F POST & PANEL

SALES: MIKE DARDIS | 800.845.9927 | CLIENT: CITY OF JOPLIN | # 2019 | DRAWING #: sc53595.2
ARTIST: D. MADDEN | CREATED: 06/10/24 | LOCATION: JOPLIN, MO | REV DATE: 00/00/00 | REV. 0 ##

03

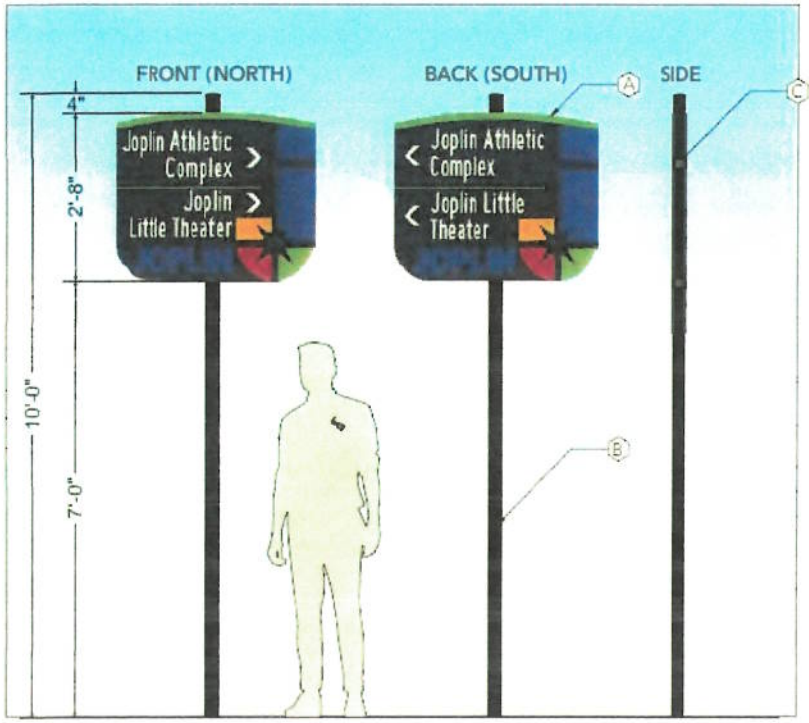

1 PROPOSAL
SCALE: 1/2"=1'

SCHIFFERDECKER SW CORNER AT 1ST ST.

VECTOR ART NEEDED

ARTWORK IS RASTERED, NOT VECTOR.
CANNOT EDIT WITHOUT REDRAW

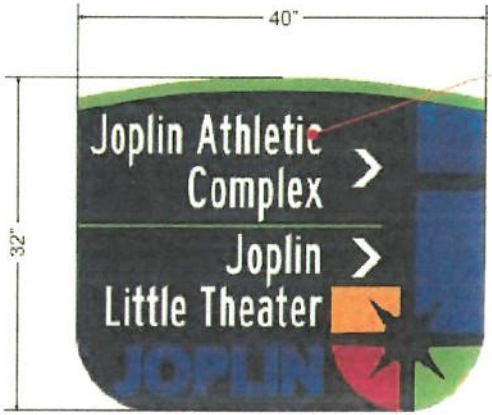

FONTS APPEAR TO BE OUTSIDE BRAND STANDARDS

2 DETAIL VIEW
SCALE: 1"=1'





3 MATERIALS
NO SCALE

DETAILS:

A - D/F 1/8" ALUMINUM SIGN PANEL
- 3M REFLECTIVE VINYL GRAPHICS

B - 2-3/8" 16 GAUGE STEEL POST & CAP
- POWDER COATED BLACK

C - DOUBLE PANEL MOUNTING BRACKETS