DEPARTMENT OF THE ARMY
U.S. ARMY CORPS OF ENGINEERS, LITTLE ROCK DISTRICT
P.O. BOX 867
LITTLE ROCK, AR 72203-0867

November 19, 2024

Regulatory Division

NATIONWIDE PERMIT NO. **SWL 2024-00223**

Mr. Dan Johnson
Director of Public Works
City of Joplin Public Works
Joplin, Missouri 64801

Dear Mr. Johnson:

Please refer to your application dated July 11, 2024, concerning Department of the Army permit requirements pursuant to Section 404 of the Clean Water Act (33 U.S. Code 1344). You requested authorization for work, including the placement of dredged and fill material, in waters of the United States associated with East Town/Cox Avenue Stormwater Improvement Project. The work will include the replacement of a collapsed and undersized culvert under Cox Avenue. The existing ditch will be graded both upstream and downstream and widened to approximately 8 feet wide to accommodate the new block wall and concrete base. The channel will be lined with 6 inches of concrete upstream and downstream of the culvert. Installation of a 73-foot-long by 9-foot-wide by 3-foot-tall reinforced concrete box culvert (RCBC) with a slope of -0. 71 % will take place, as well as construction of a new block retaining wall with a 6-inch concrete base. Up on completion of the Cox Avenue Culvert Project, the East Town Stormwater Improvements will proceed with expanding the ditch planting native vegetation adjacent to the channel and placing rip rap in the channel to stabilize it and provide drainage. The bottom of the channel is currently concrete which will be removed. The channel will be widened to 8 feet to accommodate higher flows and prevent flooding. The depth of the rip rap to be placed in the channel will be 12 inches. Permanent erosion control measures, including seeding, sodding, and planting shrubs and trees will also be done once the stream work has been completed. The project is located in an unnamed wetland and unnamed tributary to Joplin Creek, in the NW 1/4 and the NE 1/4 of section 2, T. 27 N., R. 33 W, Joplin, Jasper County, Missouri.

The proposed activities are authorized by 2 Department of the Army Nationwide Permits (NWPs) Nos. **14 & 46** (copies enclosed), provided that the conditions therein, and the following added special conditions, are met. You should become familiar with the conditions and maintain a copy of the permit at the worksite for ready reference. If changes are proposed in the design or location of the facilities, you should submit revised plans to this office for approval before construction of the change begins.

Section 401 water quality certification has been issued with conditions for the referenced NWP by the Missouri Department of Natural Resources, Water Protection Program (copy enclosed). In addition to the specific criteria and conditions of the NWP, you must comply with

the conditions specified in the certification as special conditions to this permit.

Special Conditions:

1. **The clearing of suitable habitat trees and/or snags (typically greater than 3 inches in diameter at breast height that have exfoliating bark, cracks, crevices, and/or hollows) associated with this project must be conducted between November 15th and March 15 to avoid impacts to threatened or endangered bats identified in the Endangered Species Act Section 7 review of the proposed project area. Alternatively, a professional biologist can perform a habitat assessment to ensure that no threatened or endangered bats are present outside of this hibernation period. This assessment must be submitted to the Corps of Engineers Regulatory Division for review, coordination with Federal and state agencies, and approval before tree removal can commence.**

2. **If a previously unknown cultural resource site is encountered during work authorized by this permit, the permittee shall immediately contact the Corps and avoid further impact to the site until assessment by State and Federal cultural resource specialists is complete and the Corps has verified that the requirements of 33 CFR Part 325, Appendix C, and 36 CFR Part 800 have been met. Cultural resource sites include prehistoric and historic archeological sites, and areas or structures of cultural interest that occur in the permit area.**

3. **The permittee shall debit 1,218.96 credits from an approved and operating mitigation bank which services the area as a primary service area, or 1,828.44 credits from an approved and operating mitigation bank which services the area as a secondary service area. This debit shall compensate off-site for unavoidable adverse impacts associated with the proposed project. The permittee shall complete the mitigation bank transaction and provide documentation to the Corps that the transaction occurred prior to commencing any ground-disturbing activity within the permit area.**

Please refer to NWP General Condition No. 12, which stipulates that appropriate erosion and siltation controls be used during construction and all exposed soil be permanently stabilized. Erosion control measures must be implemented during and after construction of the proposed project to comply with this permit condition.

In order to fully comply with the conditions of the NWP, you must submit the enclosed compliance certification within 30 days of completion of the project. This is required pursuant to NWP General Condition No. 30 of the permit.

This permit action is based upon a Corps of Engineers determination that the subject work is within the jurisdiction of the Department of the Army regulatory program, but does not address nor include any consideration for geographic jurisdiction on aquatic resources and shall not be

interpreted as such. You may contact the Little Rock District Regulatory Division if you wish to discuss your options for appealing this determination.

The NWP determination will be valid until March 14, 2026. If NWP No. **14 & 46** is modified, suspended, or revoked during this period, your project may not be authorized unless you have begun or are under contract to begin the project. If work has started or the work is under contract, you would then have twelve (12) months to complete the work.

The authorization of this work by a NWP does not relieve you of complying with other applicable local, state, and Federal laws, nor does it grant any property rights or exclusive privileges.

If you have any questions about this permit or any of its provisions, please contact me at (501) 340-1387 and refer to Permit No. **SWL 2024-00223**.

Please submit your comments or suggestions on our Customer Service Survey: https://regulatory.ops.usace.army.mil/customer-service-survey/

Sincerely,



John Bridgeman
Regulatory Specialist

Enclosures

cc:
US Environmental Protection Agency, Region 7
Missouri Department of Natural Resources
Missouri Department of Conservation
Proj Mgr, Beaver Lake PO
Ch, Regulatory Enf
Pablo Bacon, Regulatory Enf Branch

PERMITTEE COMPLIANCE CERTIFICATION

PERMIT NO.:	**SWL 2024-00223**	**NWP/S NO.:**	**14 & 46**

PERMITTEE NAME: **City of Joplin Public Works c/o Mr. Dan Johnson**

DATE OF ISSUANCE: **November 19, 2024**

PROJECT MANAGER: **John Bridgeman**

Upon completion of the activity authorized by this permit and any mitigation required by the permit, sign this certification and return it to the following address:

US Army Corps of Engineers, Little Rock
ATTENTION: CESWL-RD
PO Box 867
Little Rock, Arkansas 72203-0867

Please note that your permitted activity is subject to a compliance inspection by a US Army Corps of Engineers representative. If you fail to comply with this permit, you are subject to permit suspension, modification, or revocation.

I hereby certify that the work authorized by the above referenced permit has been completed in accordance with the terms and conditions of the said permit, and required mitigation was completed in accordance with the permit conditions.

DATE WORK COMPLETED: _____

_____ _____

SIGNATURE OF PERMITTEE **DATE**



Action No.: SWL 2024-00223
City of Joplin Public Works
East Town Stormwater Improvement &
Cox Avenue Culvert Project
Jasper County, Missouri
November 2024 **Page 1 of 12**

Cox Ave Culvert lowered flow line w block wall.dwg

GRAVEL DRIVE

REMOVE EXIST. DRIVE 7 SQ. YDS AND REPLACE WITH CURB AND GUTTER

REMOVE EXIST. CURB INLET AND 18" RCP

BRUSH PILE TO BE REMOVED

LTP

CTL 60D

EXIST. ROCK WALL OPEN DRAINAGE APPROX. 120 SQ. YDS TO BE REMOVED AND REPLACED w/ 18' TYP. CONC. BASE DITCH

36" TREE AND (3) STUMPS TO BE REMOVED

GRAPHIC SCALE
0 10 20 40
(IN FEET)
1 INCH = 20 FEET

CTL 60D
970.69
N=337277.72
E=2787105.95

GRADE DITCH @ .24% TO DAYLIGHT ON WEST SIDE TO STA 0+00. WIDEN EXIST. DITCH ON EA. SIDE TO MEET NEW BLOCK WALL & CONC. BASE

EXIST. ROCK WALL / OPEN DRAINAGE TO BE REMOVED AND REPLACED 6" CONC. BASE & BLOCK WALL

REMOVE 18" RCP

REMOVE EXIST.CURB INLET
RIM=973.22
INV OUT=970.35 (18" RCP,W)
2.5'W X 1.5'H BOX SITS UNDER SIDEWALK

REMOVE EXIST. BOX CULVERT

REMOVE & REPLACE APPROX. 160 LF CURB & GUTTER TOTAL

REMOVE & REPLACE APPROX. 240 SQ. YDS EXIST. SIDEWALK AND REPLACE SEE SECTION ST-11

REMOVE TREE AND STUMP IN THIS LOCATION

REMOVE & REPLACE APPROX. 330 SQ. YDS OF ASPHALT WITH CONCRETE PAVEMENT REPAIR REINF. w/ WWF 4x4-W4.0xW4.0 ALSO GRADE CONCRETE TO DRAIN TO EXIST. INLETS TO THE NORTH.

CTL 60D
973.56
N=337248.31
E=2787429.01

CUT EXIST. 12" VCP AND DRAIN THROUGH NEW BLOCK RETAINING WALL

REMOVE EXIST. CURB INLET
RIM=973.17
INV OUT=969.97 (18" RCP,NW)

ENSURE PROPER DRAINAGE IN THIS AREA AFTER DITCH HAS BEEN WIDENED TO MEET NEW WIDENED DITCH

STUMP TO BE REMOVED

REPLACE ANY EXISTING CROSS CUTS IN NEW CONCRETE SIDEWALK

WV

STREET SIGN

STOP SIGN

BURIED UTILITY MARKER

REMOVE EXIST. ADA RAMP AND REPLACE WITH TYPE C ADA RAMP APPROX. 13 SQ. YDS

CTL PIN
980.83
N=337055.64
E=2787260.74

GENERAL NOTES:
1. CONTRACTOR SHALL, AT HIS EXPENSE, SET & MAINTAIN ALL LINE & GRADE STAKES.
2. CONTRACTOR SHALL GRADE ALL EXISTING STREETS, ALLEYS, & DRIVES TO MEET NEW CONST.
3. CONTRACTOR SHALL FIELD VERIFY ALL UTILITY LOCATIONS BEFORE BEGINNING NEW CONST.
4. ALL WORK SHALL CONFORM TO THE CITY OF JOPLIN STD SPECS UNLESS OTHERWISE NOTED.
5. ALL WORK SHALL BE IN ACCORDANCE WITH THE WORK ZONE SAFETY GUIDELINES OF PART VI OF THE MUTCD & WITH THE BARRICADING SECTION OF THE CITY OF JOPLIN SAFETY MANUAL.
6. ALL PEDESTRIAN FACILITIES SHALL CONFORM TO THE APPLICABLE REQUIREMENTS OF THE ADA.
7. CONTRACTOR SHALL, AT HIS EXPENSE, PROVIDE ACCESS TO PRIVATE PROPERTY AT ALL TIMES.
8. CONTRACTOR SHALL, AT HIS EXPENSE, RETAIN THE SERVICES OF A PLS LICENSED IN MISSOURI, WHO SHALL BE RESPONSIBLE FOR RESTORING ANY INCIDENTALLY DAMAGED SURVEY MONUMENTS NOT SCHEDULED FOR REMOVAL AS PART OF CONST PROJECT. CONTRACTOR SHALL NOTIFY THE CITY OF JOPLIN OF ANY MONUMENTS DAMAGED BY ANY OUTSIDE PARTY.

Action No.: SWL 2024-00223
City of Joplin Public Works
East Town Stormwater Improvement &
Cox Avenue Culvert Project
Jasper County, Missouri
November 2024

CITY OF Joplin	CITY OF JOPLIN, MISSOURI PUBLIC WORKS DEPARTMENT DIVISION OF ENGINEERING	ADDRESS: 602 S MAIN ST 64801 PH NO: 417-624-0820 EXT 1530 FAX NO: 417-625-4738 E-MAIL: DJOHNSO1@JOPLINMO.ORG	REV DATE: 00/00	REVISION: PROJECT CHECK	SVYD BY: OLSSON PNT FILE: N/A.TXT SVY DATE: 10/2022 ENGINEER: JOHNSON	ACAD DWG FILE & PATH NAME: STORM SEWER\COX AVENUE SCALE: NTS	DWN BY: PRINGLE CKD BY: JOHNSON APD BY: JOHNSON DATE: 07/2023	PROJECT COX AVENUE BOX CULVERT AND PAVED DITCH IMPROVEMENTS	PLAN NO: 8542 SHEET 2 of 7

NOTE:
THERE WILL BE APPROXIMATELY 475 CU YDS OF CUT.
CITY WILL PROVIDE SOIL TESTING
CONTRACTOR WILL BE RESPONSIBLE FOR
PROPER DISPOSAL OF ANY CONTAMINATED SOILS.

EXISTING 3.5'W x 2.5'H RCP
FL=968.56 (squashed)
MODIFY SO THAT
SQUASHED PIPE DISCHARGES
AT NEW WING WALL
AND GROUT INTO PLACE

PAVED 6" DITCH APPROX.
200 SQ. YDS

SANITARY MH
RIM=970.44
INV IN=962.24 (10" PIPE,E)
INV IN=960.54 (12" PIPE,SE)
INV OUT=960.54 (12" PIPE,NW)

0+00
N=337313.87
E=2787128.64

CTL 60D
970.69
N=337277.72
E=2787105.95

STA: 0+43.70
N=337300.41
E=2787170.22

GRADE DITCH @ .24% TO DAYLIGHT
ON WEST SIDE TO STA 0+00. WIDEN EXIST. DITCH ON
EA. SIDE TO MEET NEW BLOCK WALL & CONC. BASE

EXIST. ROCK WALL / OPEN DRAINAGE
TO BE REMOVED AND REPLACED
6" CONC. BASE & BLOCK WALL

PC: 0+82.06
337288.62
2787206.72

PT: 1+01.22
337283.20
2787225.09

PI: 1+25.70
N=337276.87
E=2787248.75

SANITARY MH
RIM=973.12
INV IN=961.87 (8" PIPE,S)
INV IN=961.87 (12" PIPE,E)
INV OUT=961.87 (12" PIPE,NW)

SANITARY CLEANOUT
TOP=974.48

SANITARY MH
RIM=972.93
INV IN=966.33 (10" PIPE,N)
INV OUT=966.33 (10" PIPE,W)

GRAVEL DRIVE

CURB INLET
RIM=973.12
INV IN=968.62 (E)
INV OUT=968.62 (3.5'W X 2.5'H ELLIPTICAL PIPE,SW)

STORM MH RIM=972.95
CONVERT TO TYPE C INLET
INV IN=968.65 (30" RCP,N)
INV OUT=968.65 (3.5'W X 2.5'H ELLIPTICAL PIPE,W)

REMOVE EXIST. DRIVE 7 SQ. YDS AND
REPLACE WITH CURB AND GUTTER

INSTALL 45' OF NEW
RAILING IN THESE
LOCATIONS SEE
HANDRAIL
DETAIL ST-12

73.00' 108" X 36" RCBC SLOPE -0.71%

73.00' 108" X 36" RCBC SLOPE -0.71%

6" PAVED DITCH BOTTOM
APPROX. 215 SQ. YDS

STA: 2+78.22
N=337253.60
E=2787397.76

PT: 2+33.03
337250.80
2787352.75

PI: 3+35.21
337260.15
2787454.38

60D
973.56
N=337248.31
E=2787429.01

PC: 2+17.06
337253.27
2787337.00

PC: 2+37.06
337250.61
2787356.78

PT: 2+58.83
337251.33
2787378.51

SANITARY MH
RIM=975.44
INV IN=963.99 (E)
INV OUT=963.99 (12" PIPE,W)

SANITARY MH
RIM=973.68
INV IN=962.23 (W)
INV OUT=962.23 (8" PIPE,N)


GENERAL NOTES:
1. CONTRACTOR SHALL, AT HIS EXPENSE, SET & MAINTAIN ALL LINE & GRADE STAKES.
2. CONTRACTOR SHALL GRADE ALL EXISTING STREETS, ALLEYS, & DRIVES TO MEET NEW CONST.
3. CONTRACTOR SHALL FIELD VERIFY ALL UTILITY LOCATIONS BEFORE BEGINNING NEW CONST.
4. ALL WORK SHALL CONFORM TO THE CITY OF JOPLIN STD SPECS UNLESS OTHERWISE NOTED.
5. ALL WORK SHALL BE IN ACCORDANCE WITH THE WORK ZONE SAFETY GUIDELINES OF PART VI OF THE MUTCD & WITH THE BARRICADING SECTION OF THE CITY OF JOPLIN SAFETY MANUAL.
6. ALL PEDESTRIAN FACILITIES SHALL CONFORM TO THE APPLICABLE REQUIREMENTS OF THE ADA.
7. CONTRACTOR SHALL, AT HIS EXPENSE, PROVIDE ACCESS TO PRIVATE PROPERTY AT ALL TIMES.
8. CONTRACTOR SHALL, AT HIS EXPENSE, RETAIN THE SERVICES OF A PLS LICENSED IN MISSOURI, WHO SHALL BE RESPONSIBLE FOR RESTORING ANY INCIDENTALLY DAMAGED SURVEY MONUMENTS NOT SCHEDULED FOR REMOVAL AS PART OF CONST PROJECT. CONTRACTOR SHALL NOTIFY THE CITY OF JOPLIN OF ANY MONUMENTS DAMAGED BY ANY OUTSIDE PARTY.

N

0 10 20 40
(IN FEET)
1 INCH = 20 FEET

ALIGNMENT CURVES

CURVE ID #	STATION RANGE	START COORD.	END COORD.	RADIUS (FT)	LENGTH (FT)	DELTA	CHORD BEARING	CHORD LENGTH (FT)
C1	0+82.06 1+01.22	N: 337288.62 E: 2787206.72	N: 337283.20 E: 2787225.09	372.69	19.16	002°56'43"	S73°33'07"E	19.16
C2	2+17.06 2+33.03	N: 337253.27 E: 2787337.00	N: 337250.80 E: 2787352.75	75.17	15.97	012°10'22"	S81°06'40"E	15.94
C3	2+37.06 2+58.83	N: 337250.61 E: 2787356.78	N: 337251.33 E: 2787378.51	132.20	21.77	009°26'01"	N88°05'09"E	21.74

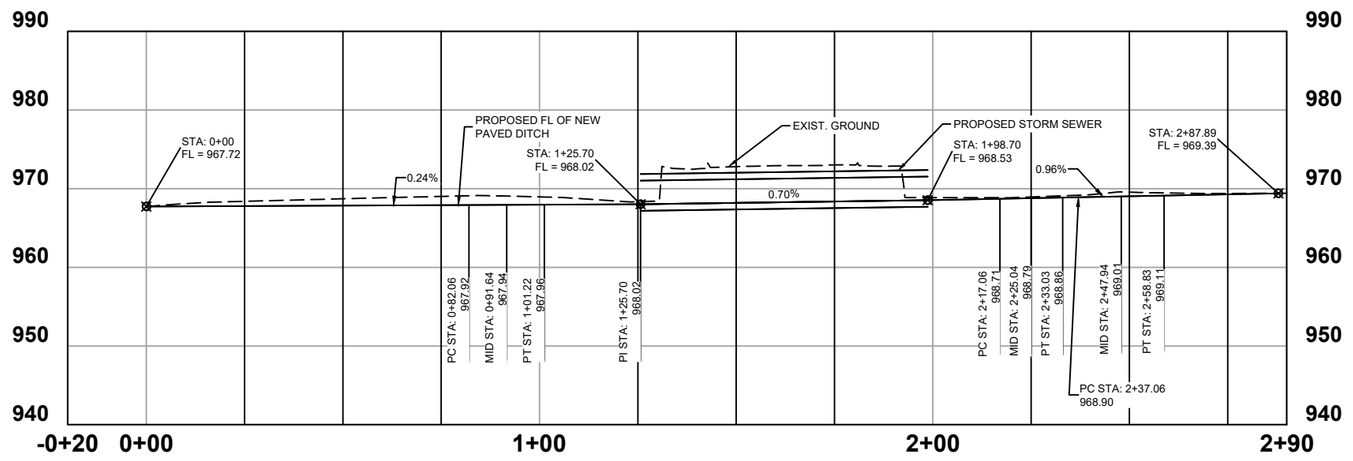

Action No.: SWL 2024-00223
City of Joplin Public Works
East Town Stormwater Improvement &
Cox Avenue Culvert Project
Jasper County, Missouri
November 2024 **Page 3 of 12**

Cox Ave Culvert lowered flow line w block wall.dwg

CITY OF Joplin

CITY OF JOPLIN, MISSOURI
PUBLIC WORKS DEPARTMENT
DIVISION OF ENGINEERING

ADDRESS: 602 S MAIN ST 64801
PH NO: 417-624-0820 EXT 530
FAX NO: 417-625-4738
E-MAIL: DJOHNSO1@JOPLINMO.ORG

REV DATE:	REVISION:
00/2023	PROJECT CHECK

SVYD BY: OLSSON
PNT FILE: N/A.TXT
SVY DATE: 10/2022
ENGINEER: JOHNSON


ACAD DWG FILE & PATH NAME: STORM SEWER\COX AVENUE
SCALE: HORZ: 1" = 20' VERT: 1" = 10'

DWN BY: PRINGLE
CKD BY: JOHNSON
APD BY: JOHNSON
DATE: 07/2023

PROJECT
COX AVENUE BOX CULVERT
AND PAVED DITCH IMPROVEMENTS


PLAN NO: 8542
SHEET
3 of 7

HANDRAIL DETAIL
N.T.S.




SEE MODOT STD. 608.20E FOR ADDITIONAL DETAILS

SET POSTS 8" DEEP IN CONC WALL OR FOOTING OR 12" DEEP IF ATTACHED W/ BASE PLATES



CONC FOOTING DETAIL
N.T.S.




BASE PLATE DETAIL
N.T.S.

GENERAL NOTES:
1. BASEPLATES SHALL BE ALUMINUM ALLOY 6061-T6 OR 6063-T6.
2. BASEPLATE BOLTS SHALL BE 5/8" X 1 1/2" LONG.
3. IF PRE-MANUFACTURED HANDRAIL COMPONENTS ARE TO BE USED, PRIOR APPROVAL IS REQUIRED.
4. ALL JOINTS SHALL BE CONTINUOUS WELDED.


ST-12

CITY OF JOPLIN, MO	CKD BY: JOHNSON	PROJECT
PUBLIC WORKS DEPT	DATE: 4/2019	HANDRAIL DETAIL
ENGINEERING DIVISION	ENGINEER: HERTZBERG	
602 S MAIN ST 64801	FILE: HANDRAIL	

NOTES:
1. ALL GUTTER CONST IN FRONT OF RAMP & ALL C&G IN RAMP TRANSITIONS SHALL BE INCLUDE IN THE BID PRICE OF THE C&G.
2. BID PRICE (PAID BY SY) FOR ALL RAMPS SHALL INCLUDE ALL EXCAVATION, LABOR, & MATERIALS REQUIRED TO CONST RAMP (THIS INCLUDES TRUNCATED DOMES).
3. ALL POURED CONC SHALL BE CLASS 'B' FIBER REINFORCED.
4. RAMPS SHALL NOT EXCEED 30" VERTICALLY WITHOUT 5' X 5' LANDING.



TYPE 'C' ADA RAMP
N.T.S.




ST-16

CITY OF JOPLIN, MO	CKD BY: JOHNSON	PROJECT
PUBLIC WORKS DEPT	DATE: 10/2021	TYPE 'C' ADA RAMP
ENGINEERING DIVISION	ENGINEER: HERTZBERG	
602 S MAIN ST 64801	FILE: TYPECADARAMP	

Cox Ave Culvert lowered flow line w block wall.dwg

Action No.: SWL 2024-00223
City of Joplin Public Works
East Town Stormwater Improvement & Cox Avenue Culvert Project
Jasper County, Missouri
November 2024


CITY OF JOPLIN, MISSOURI PUBLIC WORKS DEPARTMENT DIVISION OF ENGINEERING	ADDRESS: 602 S MAIN ST 64801 PH NO: 417-624-0820 EXT 1530 FAX NO: 417-625-4738 E-MAIL: DJOHNSO1@JOPLINMO.ORG	REV DATE: 00/00	REVISION: PROJECT CHECK	SVYD BY: OLSSON PNT FILE: N/A.TXT SVY DATE: 10/2022 ENGINEER: JOHNSON	ACAD DWG FILE & PATH NAME: STORM SEWER\COX AVENUE SCALE: NTS	DWN BY: PRINGLE CKD BY: JOHNSON APD BY: JOHNSON DATE: 07/2023	PROJECT COX AVENUE BOX CULVERT AND PAVED DITCH IMPROVEMENTS	PLAN NO: 8542 SHEET 4 of 7

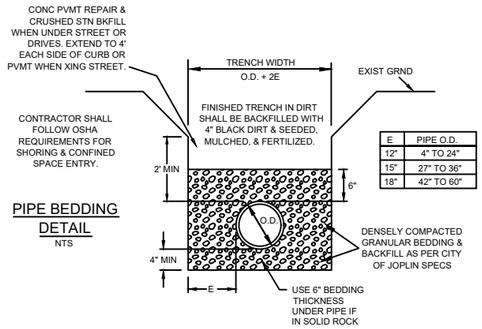

PIPE BEDDING DETAIL
NTS

SAN-01

CITY OF JOPLIN, MO	CKD BY: JOHNSON	PROJECT
PUBLIC WORKS DEPT	DATE: 12/2020	PIPE BEDDING DETAIL
ENGINEERING DIVISION	ENGINEER: HERTZBERG	
602 S MAIN ST 64801	FILE: BEDDET	




CONC PVMT REPAIR
NTS

NOTES:
1. BLACK DYE PER CITY OF JOPLIN SPECIFICATIONS 1700.3.12

SAN-05


CITY OF JOPLIN, MO	CKD BY: JOHNSON	PROJECT
PUBLIC WORKS DEPT	DATE: 2/2019	CONC PVMT REPAIR
ENGINEERING DIVISION	ENGINEER: HERTZBERG	
602 S MAIN ST 64801	FILE: PVMTREPR	



EXIST INLET OR RCB CONNECTION
N.T.S.


STM-01

CITY OF JOPLIN, MO	CKD BY: JOHNSON	PROJECT
PUBLIC WORKS DEPT	DATE: 10/2021	EXIST INLET OR RCB CONNECTION
ENGINEERING DIVISION	ENGINEER: HERTZBERG	
602 S MAIN ST 64801	FILE: INLETTAP	




SECTION A-A
SCALE = NTS

TYPE 'C' CURB INLET
N.T.S.



INLET NOTES:
1. BOTTOM OF INLET SHALL BE 9" TH WITH #4 REBAR SPACED 10" OC BOTH WAYS.
2. FLOOR OF INLET SHALL BE SHAPED WITH INVERT TO PROVIDE SMOOTH FLOW.
3. STEPS ARE NOT ALLOWED.
4. BEVEL ALL EXPOSED EDGES WITH 3/4" CHAMFER OR 1/2" TOOLED EDGE.
5. THE SUM OF "L" & "W" SHALL NOT EXCEED 14' WITHOUT SPECIAL DESIGN.
6. ALL GUTTER CONSTRUCTED IN FRONT OF INLET, ALL C&G IN CURB REPAIRS OR REPLACEMENTS & ALL SIDEWALK CONST AROUND INLET SHALL BE INCLUDED IN THE BID PRICE OF THE INLET.
7. SAW CUT & REPL AN EXTRA 2' OF CURB ON BOTH SIDES WHEN CONST IN EXIST CURB.
8. ALL POURED CONCRETE SHALL BE CLASS 'B'.
9. EDGE OF BOX SHALL BE A MINIMUM OF 15' FROM CURB RADIUS PC.
10. BEDDING SHALL BE IN ACCORDANCE WITH CITY OF JOPLIN STANDARD SPECIFICATIONS SECTION 4400.3.4




PLAN VIEW
SCALE = NTS

NOTES:
1. BID ITEM LIMIT TO INCLUDE THE C & G, SIDEWALK, & ANY SEED & MULCH NEEDED WITHIN 2' OF BOX FACES.
2. BOX CAN BE CAST-IN-PLACE OR PRECAST.

STM-03

CITY OF JOPLIN, MO	CKD BY: JOHNSON	PROJECT
PUBLIC WORKS DEPT	DATE: 10/2021	TYPE 'C' CURB INLET
ENGINEERING DIVISION	ENGINEER: HERTZBERG	
602 S MAIN ST 64801	FILE: TYPECCB	

DETAIL NOT USED




CONSTRUCT 6" X 18" CONCRETE TOE WALL AT START & END OF DITCH & ALSO EVERY 100'


STM-07

CITY OF JOPLIN, MO	CKD BY: JOHNSON	PROJECT
PUBLIC WORKS DEPT	DATE: 2/2019	CONC DITCH W/ INVERT
ENGINEERING DIVISION	ENGINEER: HERTZBERG	
602 S MAIN ST 64801	FILE: CONCDITCH	

TYPICAL SECTION
2 LANE W/ NO BIKE LANES
N.T.S.




TYPICAL SECTION
3 LANE COLLECTOR W/ NO BIKE LANES
N.T.S.



ST-02

CITY OF JOPLIN, MO	CKD BY: JOHNSON	PROJECT
PUBLIC WORKS DEPT	DATE: 10/2020	TYPICAL SECTIONS 2 & 3 LANE STREETS
ENGINEERING DIVISION	ENGINEER: HERTZBERG	
602 S MAIN ST 64801	FILE: ARTERIALTYP1	

* = OPTIONAL WITH APPROVAL BY CITY ENGINEER.




NOTES:
1. CONSTRUCT EXPANSION JOINTS AT THE START & END OF CURB INLETS.
2. CONSTRUCT CONTRACTION JOINTS EVERY 12.5' MAXIMUM.
3. JOINT MATERIAL TO EXTEND THRU C & G, FRONT TO BACK, & NEATLY TRIMMED TO MATCH CONC SURFACE.
4. FLOAT GROUT TO SURFACE ON EXPOSED SURFACES.
5. ALL POURED CONCRETE SHALL BE CLASS 'B' WITH FIBER REINFORCEMENT.


STD UPRIGHT C & G
N.T.S.

ST-04


CITY OF JOPLIN, MO	CKD BY: JOHNSON	PROJECT
PUBLIC WORKS DEPT	DATE: 12/2020	STD UPRIGHT CURB & GUTTER
ENGINEERING DIVISION	ENGINEER: HERTZBERG	
602 S MAIN ST 64801	FILE: CURBDET	



CLASS 'A' CONC SIDEWALK
NTS



CLASS 'B' CONC SIDEWALK
NTS



NOTES:
1. CONSTRUCT EXPANSION JOINTS AT CURB INLETS.
2. CONSTRUCT CONTRACTION JOINTS EVERY 10' MAXIMUM.
3. USE CLASS 'B1' CONCRETE.
4. REINFORCEMENT IS OPTIONAL.
5. CROSS SLOPE OF WALK & DIRT BACKSLOPE CAN SLOPE AWAY FROM CURB IN FILL.

CITY OF JOPLIN, MO	CKD BY: JO
PUBLIC WORKS DEPT	DATE:
ENGINEERING DIVISION	ENGINEER: HERTZ
602 S MAIN ST 64801	FILE: ST

Action No.: SWL 2024-00223
City of Joplin Public Works
East Town Stormwater Improvement &
Cox Avenue Culvert Project
Jasper County, Missouri
November 2024 Page 5 of 12

Cox Ave Culvert lowered flow line w block wall.dwg


CITY OF JOPLIN, MISSOURI	ADDRESS: 602 S MAIN ST 64801	REV DATE:	REVISION:	SVYD BY: OLSSON	ACAD DWG FILE & PATH NAME: STORM SEWER\COX AVENUE	DWN BY: PRINGLE
PUBLIC WORKS DEPARTMENT	PH NO: 417-624-0820 EXT 1530	00/00	PROJECT CHECK	PNT FILE: N/A.TXT		CKD BY: JOHNSON
DIVISION OF ENGINEERING	FAX NO: 417-625-4738			SVY DATE: 10/2022	SCALE: NTS	APD BY: JOHNSON
	E-MAIL: DJOHNSO1@JOPLINMO.ORG			ENGINEER: JOHNSON		DATE: 07/2023


COX AVENUE BOX CULVERT AND PAVED DITCH IMPROVEMENTS


SHEET 5 of 7


GENERAL NOTES:


1. CONTRACTOR SHALL, AT HIS EXPENSE, SET & MAINTAIN ALL LINE & GRADE STAKES.
2. CONTRACTOR SHALL GRADE ALL EXISTING STREETS, ALLEYS, & DRIVES TO MEET NEW CONST.
3. CONTRACTOR SHALL FIELD VERIFY ALL UTILITY LOCATIONS BEFORE BEGINNING NEW CONST.
4. ALL WORK SHALL CONFORM TO THE CITY OF JOPLIN STD SPECS UNLESS OTHERWISE NOTED.
5. ALL WORK SHALL BE IN ACCORDANCE WITH THE WORK ZONE SAFETY GUIDELINES OF PART VI OF THE MUTCD & WITH THE BARRICADING SECTION OF THE CITY OF JOPLIN SAFETY MANUAL.
6. ALL PEDESTRIAN FACILITIES SHALL CONFORM TO THE APPLICABLE REQUIREMENTS OF THE ADA.
7. CONTRACTOR SHALL, AT HIS EXPENSE, PROVIDE ACCESS TO PRIVATE PROPERTY AT ALL TIMES.
8. CONTRACTOR SHALL, AT HIS EXPENSE, RETAIN THE SERVICES OF A PLS LICENSED IN MISSOURI, WHO SHALL BE RESPONSIBLE FOR RESTORING ANY INCIDENTALLY DAMAGED SURVEY MONUMENTS NOT SCHEDULED FOR REMOVAL AS PART OF CONST PROJECT. CONTRACTOR SHALL NOTIFY THE CITY OF JOPLIN OF ANY MONUMENTS DAMAGED BY ANY OUTSIDE PARTY.














Action No.: SWL 2024-00223
City of Joplin Public Works
East Town Stormwater Improvement &
Cox Avenue Culvert Project
Jasper County, Missouri
November 2024 **Page 6 of 12**

Cox Ave Culvert lowered flow line w block wall.dwg

CITY OF Joplin

CITY OF JOPLIN, MISSOURI
PUBLIC WORKS DEPARTMENT
DIVISION OF ENGINEERING

ADDRESS: 602 S MAIN ST 64801
PH NO: 417-624-0820 EXT 1530
FAX NO: 417-625-4738
E-MAIL: DJOHNSO1@JOPLINMO.ORG

REV DATE:	REVISION:
00/00	PROJECT CHECK


SVYD BY: OLSSON
PNT FILE: N/A.TXT
SVY DATE: 10/2022
ENGINEER: JOHNSON

ACAD DWG FILE & PATH NAME: STORM SEWER\COX AVENUE
SCALE: NTS

DWN BY: PRINGLE
CKD BY: JOHNSON
APD BY: JOHNSON
DATE: 07/2023

PROJECT
COX AVENUE BOX CULVERT
AND PAVED DITCH IMPROVEMENTS

PLAN NO: 8542
SHEET
6 of 7

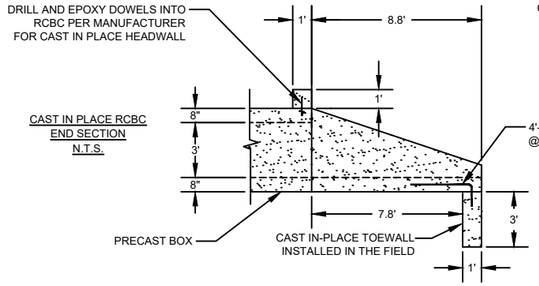


CAST IN PLACE RCBC END SECTION
N.T.S.

CONC TO BE 5000 PSI

TYPICAL LAYING LENGTH OF 6' JOINTS

REINFORCEMENT VARIES AS TO MANUFACTURER





PRECAST RCB TYPICAL SECTION
N.T.S.


CONC TO BE 5000 PSI

JOINTS SHALL BE SEALED WITH MORTAR, MASTIC, OR FLEXIBLE BUTYL RUBBER SEALANTS.

INSTALLATION & BEDDING AS PER MANUFACTURER'S SPECIFICATIONS.

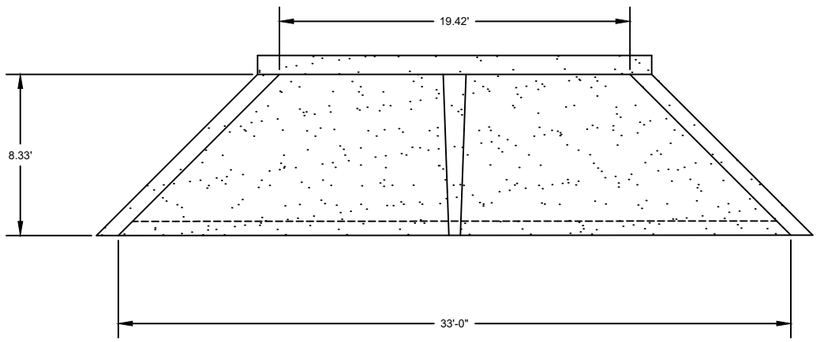




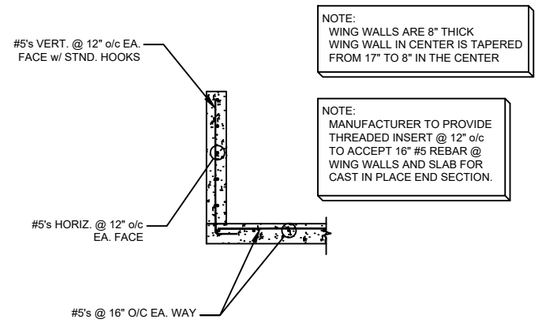


NOTE:
WING WALLS ARE 8" THICK
WING WALL IN CENTER IS TAPERED FROM 17" TO 8" IN THE CENTER

NOTE:
MANUFACTURER TO PROVIDE THREADED INSERT @ 12" o/c TO ACCEPT 16" #5 REBAR @ WING WALLS AND SLAB FOR CAST IN PLACE END SECTION.


WING WALL , SLAB, AND OPNG. REINFORCEMENT
TYPICAL SECTION
N.T.S.

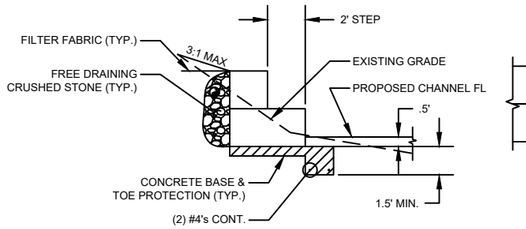



BLOCK SIZE:
SMALL BLOCK ARE SHOWN A NOMINAL 4' LONG BY 2' WIDE BY 2' TALL AND LARGE BLOCKS ARE SHOWN A NOMINAL 4' LONG BY 4' WIDE BY 2' TALL
ACTUAL DIMENSION MAY VARY. HOLD STEP DIMENSIONS AND VERTICAL FACES AS SHOWN ON THE DETAILS AND PLANS.

BLOCK QTY:
SMALL BLOCK ARE SHOWN A NOMINAL 4' LONG BY 2' WIDE BY 2' TALL QTY = 72
LARGE BLOCKS ARE SHOWN A NOMINAL 4' LONG BY 4' WIDE BY 2' TALL QTY = 72



BLOCK RETAINING WALL TYPICAL SECTIONS
N.T.S.

REBAR / WWF NOTE:
PROVIDE 3" CLR. FOR CONCRETEE CAST AGAINST EARTH AND 2" CLR. FOR FORMED CONC. & TOP COVER.

FRENCH DRAIN NOTE:
INSTALL FRENCH DRAIN ON GRADE WITH WALL AND PROVIDE A TEE FITTING AT MID SPAN OF EA. WALL (4) TOTAL AND STUB A 6" PIPE OUT THRU THE BLOCK WALL AT EACH TEE AND GROUT THE PIPE IN PLACE.

LIFT HOOK/HOLE NOTE:
CUT LIFT HOOKS OFF BELOW TOP OF BLOCK IF REQD. AND GROUT LIFT HOLE.

CONCRETE BASE NOTE:
CAST CONCRETE BASE ON UNDISTURBED EARTH UNLESS SOIL IS DEEMED UNSUITABLE BY THE ENGINEER ON SITE. CONTRACTOR HAS OPTION USING EARTH TO FORM THE FRONT EDGE OR TO FORM STRAIGHT.

Action No.: SWL 2024-00223
City of Joplin Public Works
East Town Stormwater Improvement &
Cox Avenue Culvert Project
Jasper County, Missouri
November 2024 **Page 7 of 12**

Cox Ave Culvert lowered flow line w block wall.dwg

CITY OF Joplin

CITY OF JOPLIN, MISSOURI
PUBLIC WORKS DEPARTMENT
DIVISION OF ENGINEERING

ADDRESS: 602 S MAIN ST 64801
PH NO: 417-624-0820 EXT 1530
FAX NO: 417-625-4738
E-MAIL: DJOHNSO1@JOPLINMO.ORG

REV DATE:	REVISION:
00/00	PROJECT CHECK


SVYD BY: OLSSON
PNT FILE: N/A.TXT
SVY DATE: 10/2022
ENGINEER: JOHNSON

ACAD DWG FILE & PATH NAME: STORM SEWER\COX AVENUE
SCALE: NTS

DWN BY: PRINGLE
CKD BY: JOHNSON
APD BY: JOHNSON
DATE: 07/2023

COX AVENUE BOX CULVERT
AND PAVED DITCH IMPROVEMENTS

PLAN NO.: 6042
SHEET
7 of 7

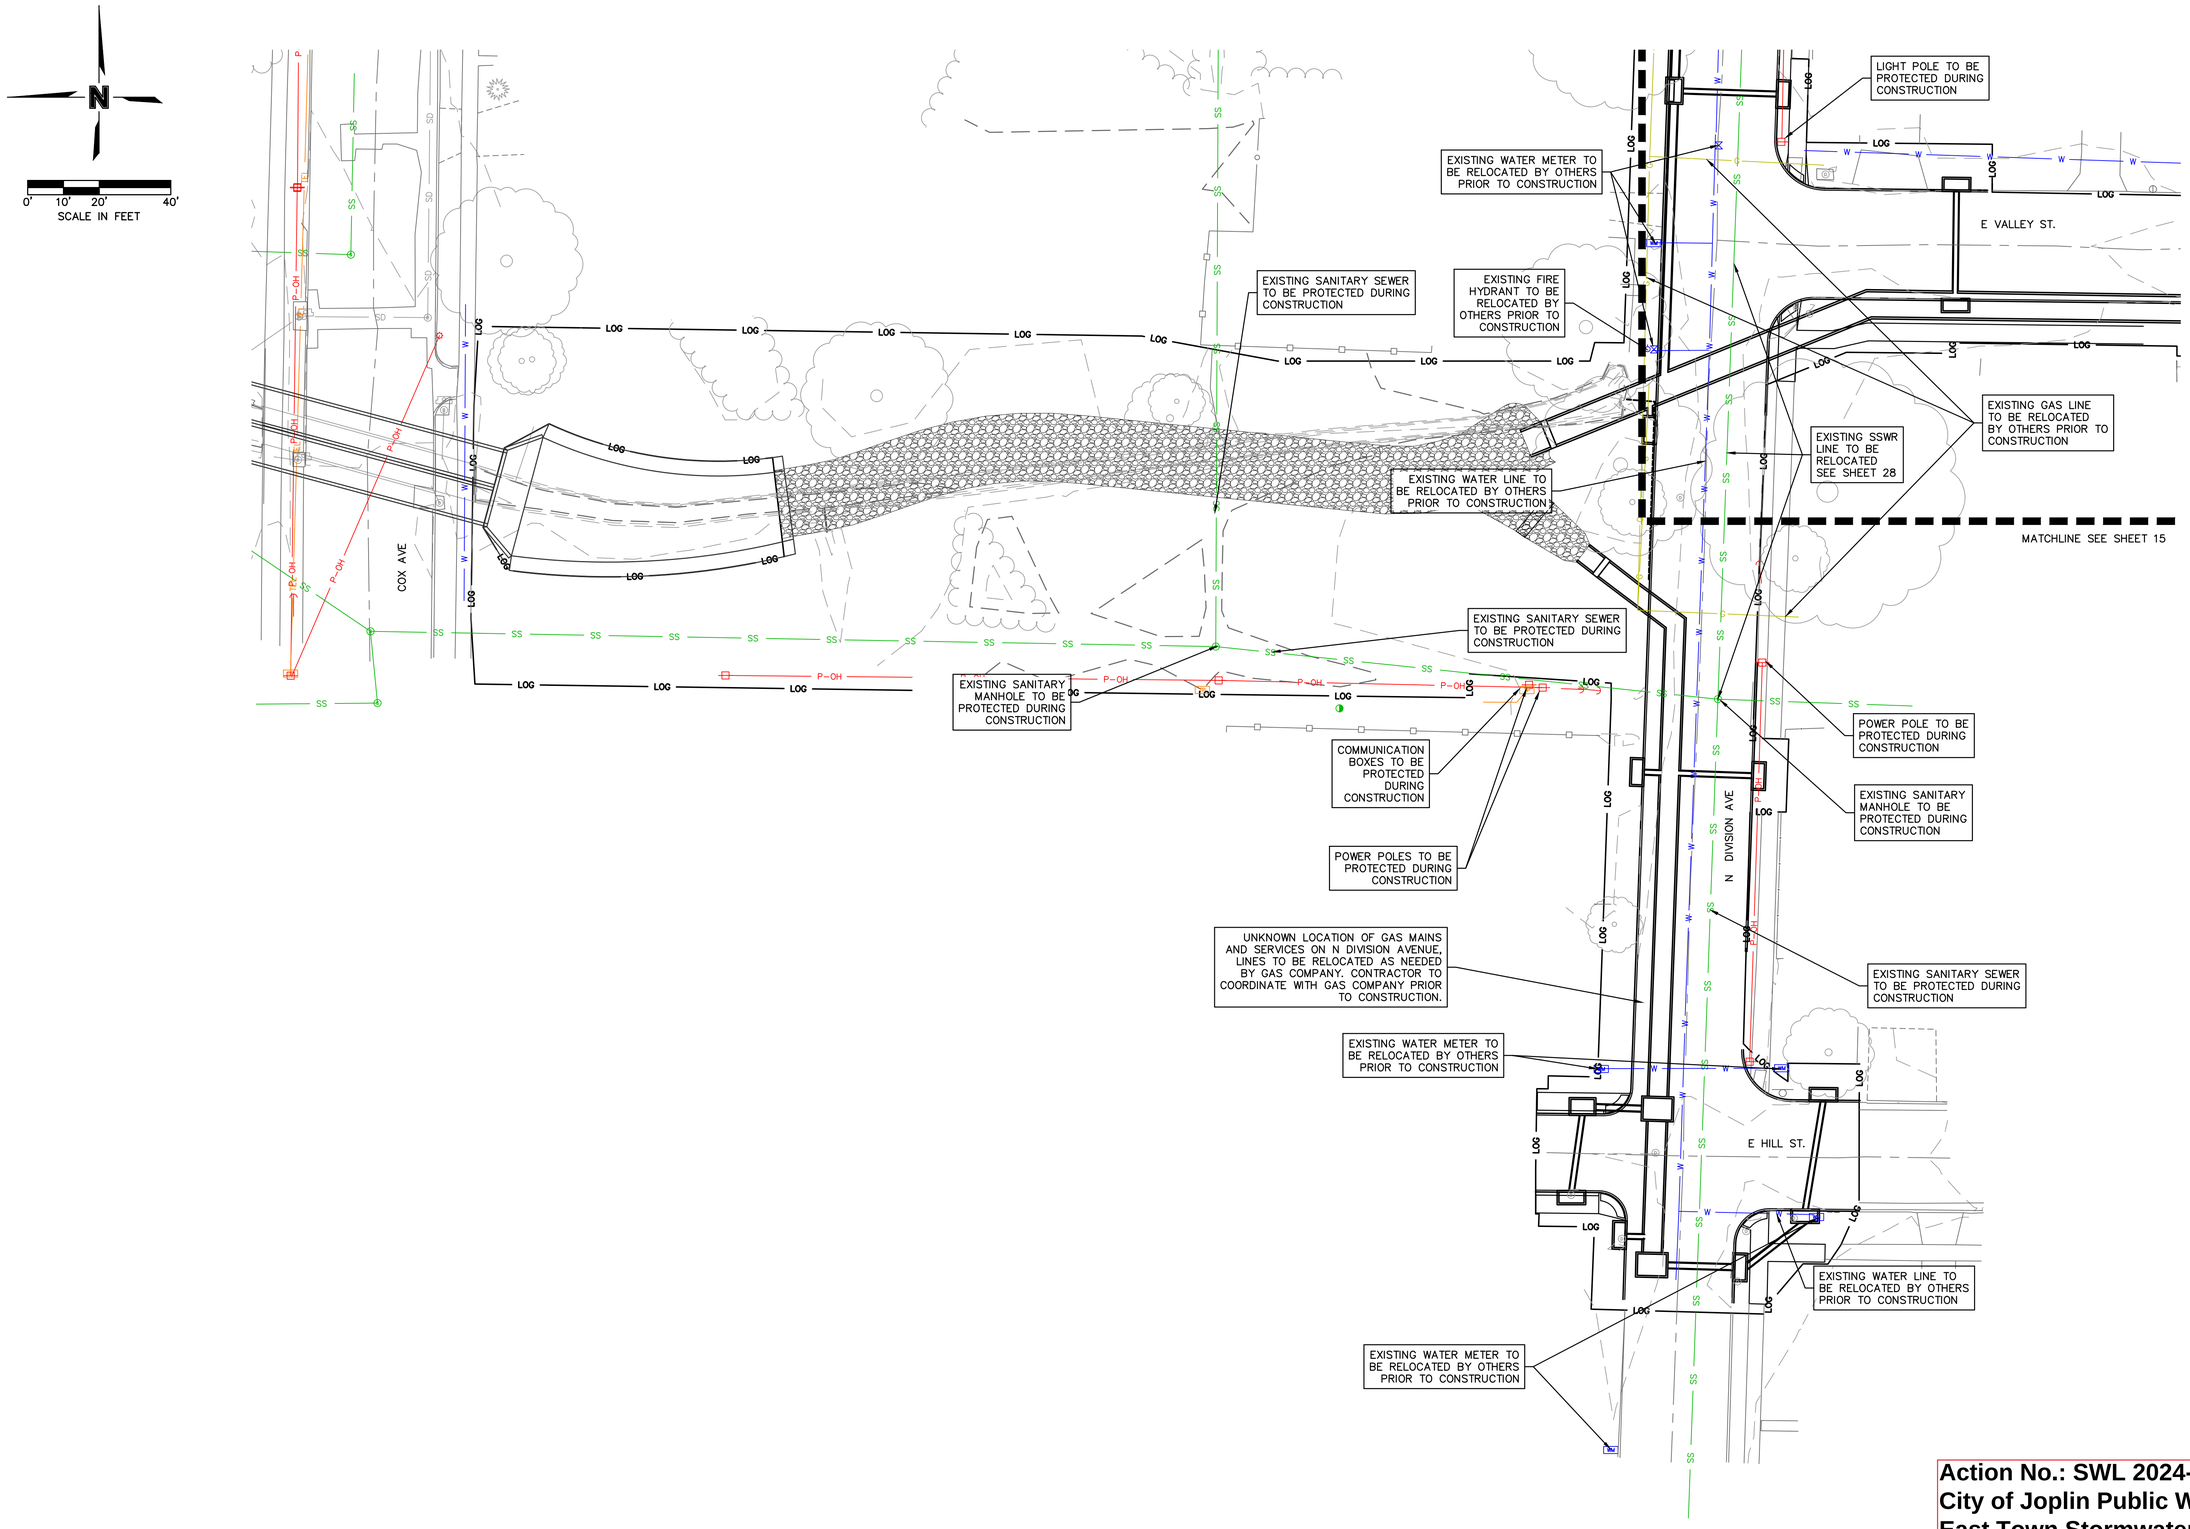

olsson
Olsson, INC. Engineering MO State Cert. of Authority #001592
505 St. Louis St. Springfield, MO 65806
TEL 417.890.8802
www.olsson.com

NOT FOR CONSTRUCTION

FOR PRELIMINARY REVIEW ONLY. NOT FOR BIDDING, PERMITTING OR CONSTRUCTION.

REV. NO.	DATE	REVISIONS DESCRIPTION	NO.	DATE	REVISIONS

UTILITY RELOCATION


VALLEY STREET & DIVISION AVENUE STORMWATER IMPROVEMENTS

2024

JOPLIN, MISSOURI


Action No.: SWL 2024-00223
City of Joplin Public Works
East Town Stormwater Improvement &
Cox Avenue Culvert Project
Jasper County, Missouri
November 2024

DWG: F:\2023\00501-01000\023-00749-B\40-Design\AutoCAD\Final Plans\Sheets\WTRS\W_UTL02_B2300749.dwg USER: nmcneal
DATE: Jul 11, 2024 5:07pm XREFS: W_XBASE_B2300749 V_XBNDY_B2300749 W_PTBLK_B2300749 W_PBASE_B2300749
T_PBASE_B2300749

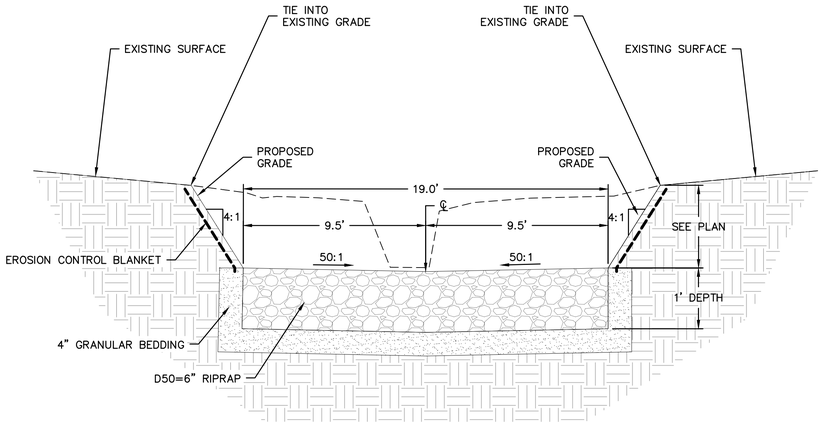


TYPICAL SECTION CHANNEL CENTERLINE
STA. 100+00 - 101+75

N.T.S

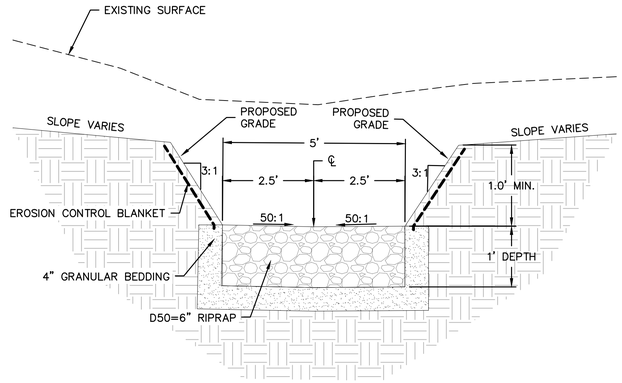

TYPICAL SECTION STORMLINE 300 DITCH
STA. 300+00 - 300+40

N.T.S

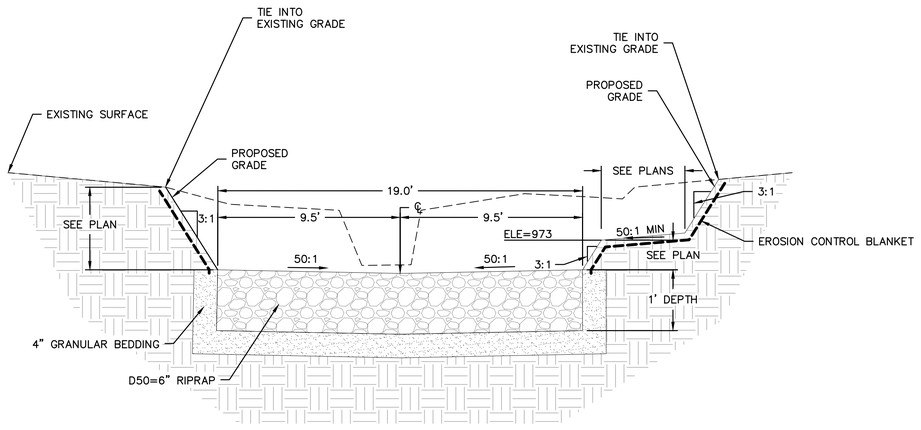

TYPICAL SECTION CHANNEL CENTERLINE
STA. 101+75 - 102+14

N.T.S

olsson
Olsson, INC. Engineering MO State Cert. of Authority #001592
500 St. Louis St. Springfield, MO 65806
TEL 417.890.8802 www.olsson.com

NOT FOR CONSTRUCTION

FOR PRELIMINARY REVIEW ONLY. NOT FOR BIDDING, PERMITTING OR CONSTRUCTION.

REV. NO.	DATE	REVISIONS DESCRIPTION	NO.	DATE	DESCR.
					REVISIONS

TYPICAL SECTIONS


VALLEY STREET & DIVISION AVENUE
STORMWATER IMPROVEMENTS

2024


JOPLIN, MISSOURI

Action No.: SWL 2024-00223
City of Joplin Public Works
East Town Stormwater Improvement &
Cox Avenue Culvert Project
Jasper County, Missouri
November 2024

DWG: F:\2023\00501-01000\023-00749-B\40-Design\AutoCAD\Final Plans\Sheets\WTRS\W_TYP01_B2300749.dwg USER: nmcneal
DATE: Jul 11, 2024 5:07pm XREFS: V_XBNDY_B2300749 W_XBASE_B2300749 W_PTBLK_B2300749

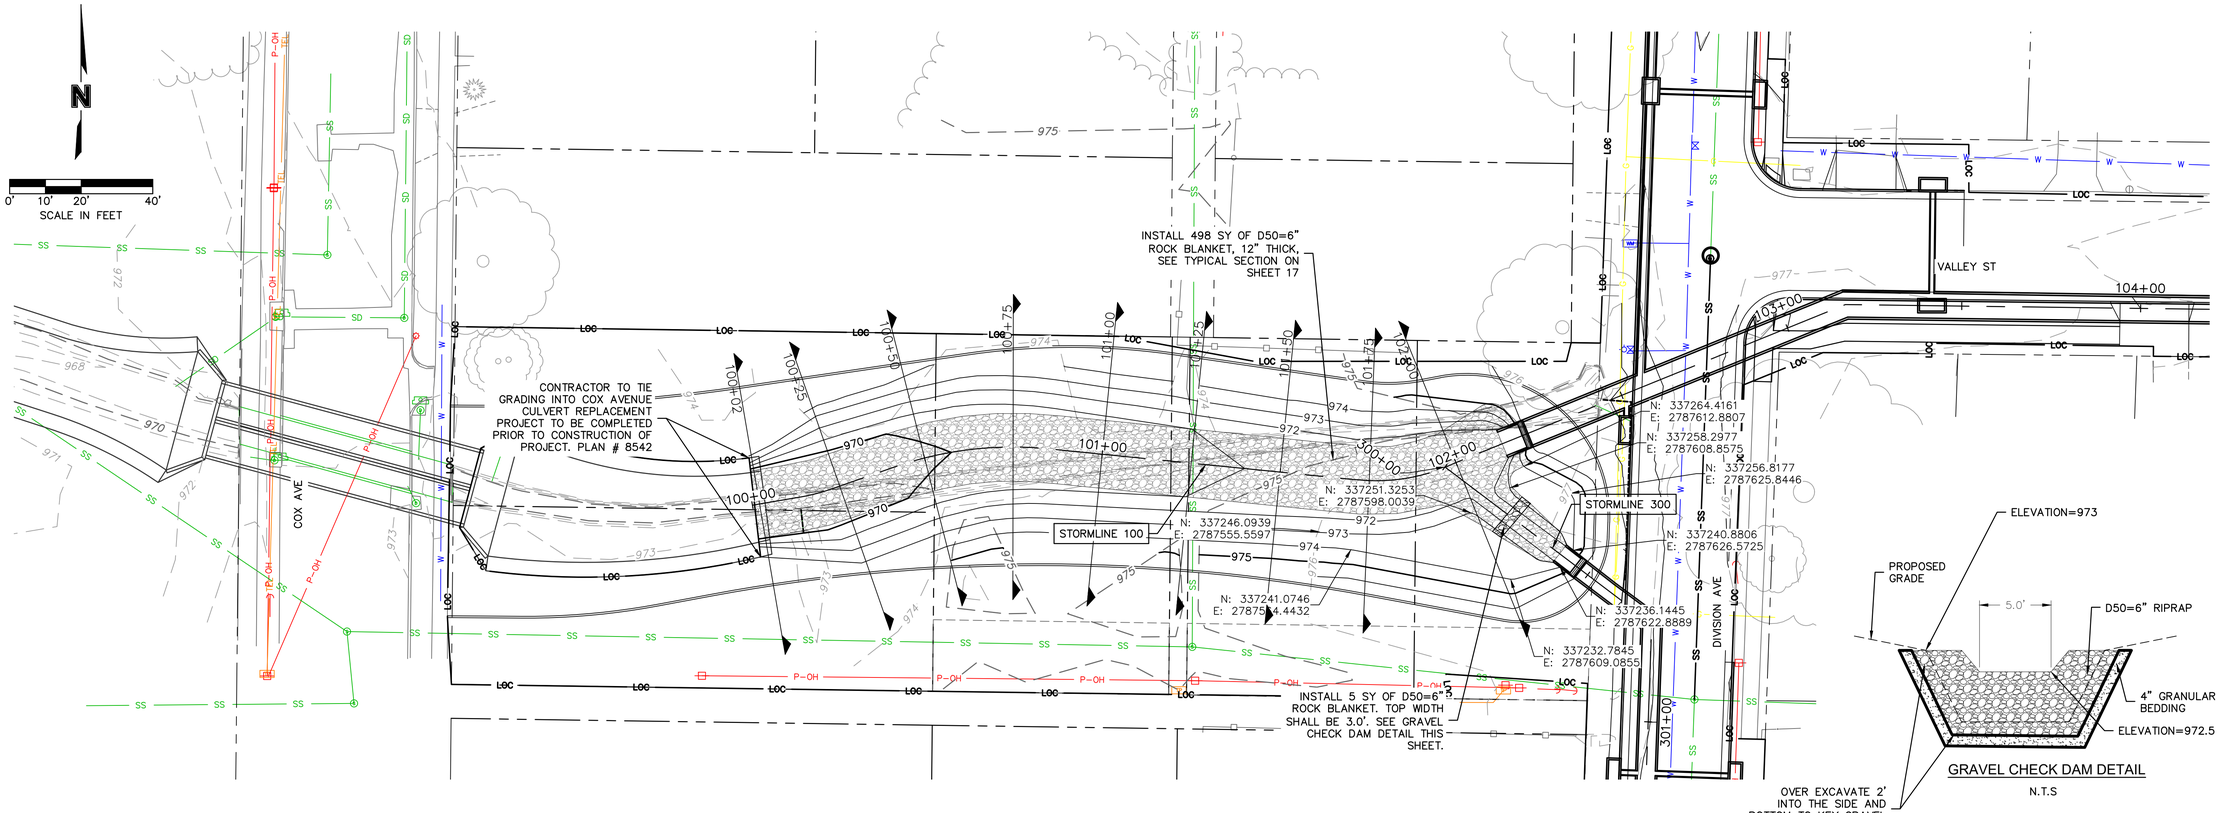

STORMLINE 100 (100+00 - 103+00)

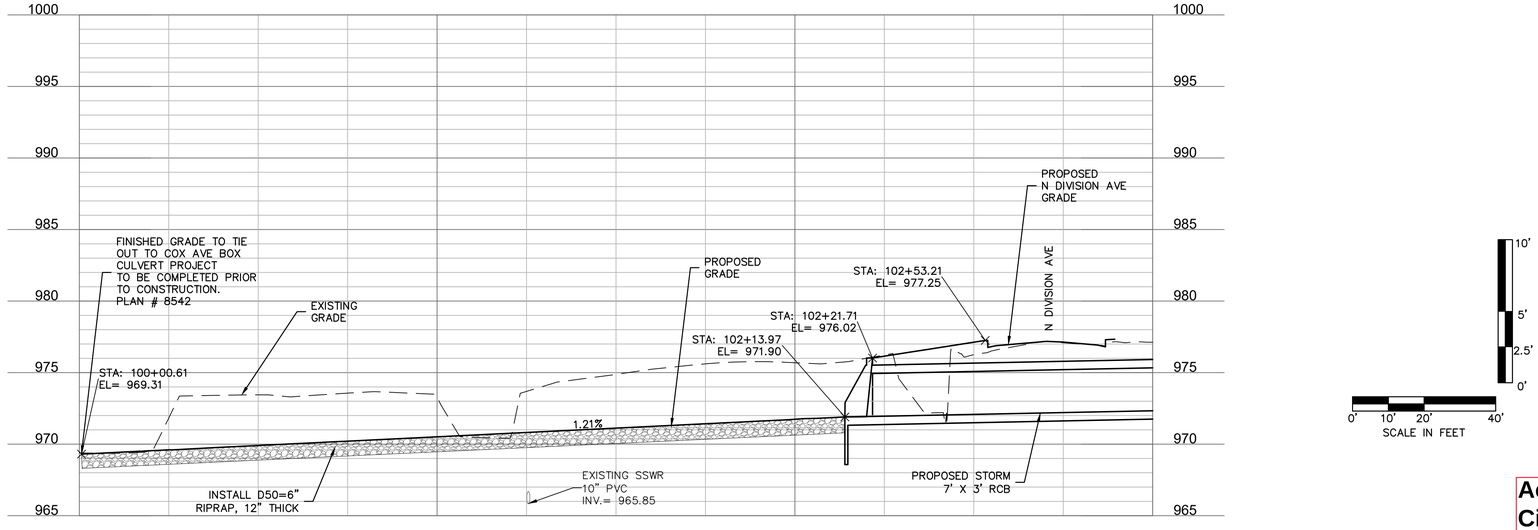

olsson
Olsson, INC. Engineering MO State Cert. of Authority #001592
505 St. Louis St. Springfield, MO 65806
TEL 417.890.8802
www.olsson.com

NOT FOR CONSTRUCTION
FOR PRELIMINARY REVIEW ONLY. NOT FOR BIDDING, PERMITTING OR CONSTRUCTION.

REV. NO.	DATE	REVISIONS DESCRIPTION	NO.	DATE	DESCR.
					REVISIONS

CHANNEL PLAN AND PROFILE

VALLEY STREET & DIVISION AVENUE STORMWATER IMPROVEMENTS

2024

JOPLIN, MISSOURI


Action No.: SWL 2024-00223
City of Joplin Public Works
East Town Stormwater Improvement &
Cox Avenue Culvert Project
Jasper County, Missouri
November 2024

DWG: F:\2023\00501-01000\023-00749-B\40-Design\AutoCAD\Final Plans\Sheets\WTRS\W_STM01_B2300749.dwg
DATE: Jul 11, 2024 5:08pm
XREFS: W_XBASE_B2300749 V_XBNDY_B2300749 W_PTBLK_B2300749
USER: nmcneal T_PBASE_B2300749 W_PBASE_B2300749


PROPOSED CHANNEL

CROSS SECTIONS


NOTE: CROSS SECTIONS LOOKING UPSTREAM

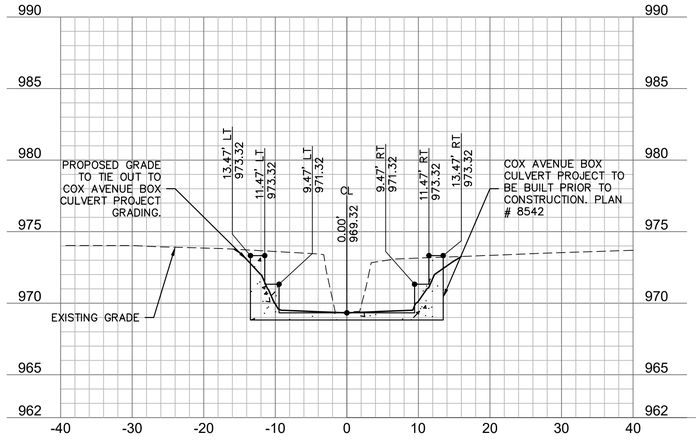


100+02

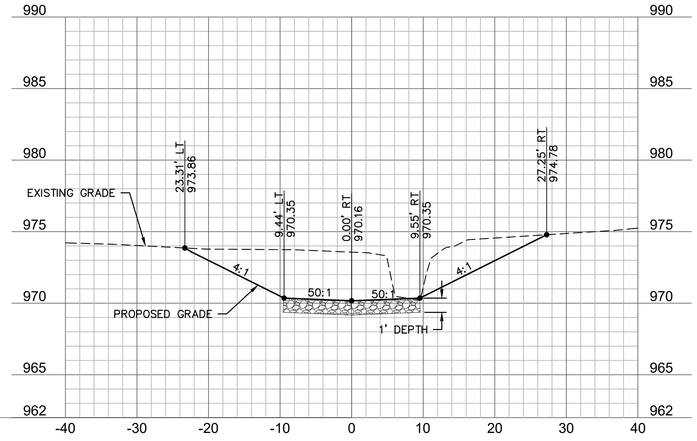


100+75

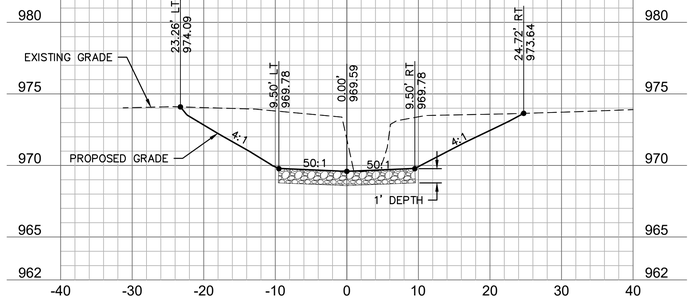


100+25

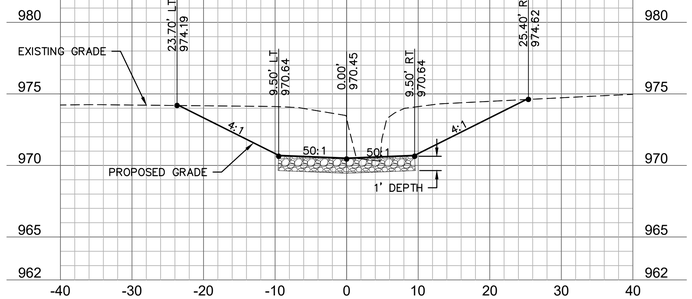

101+00

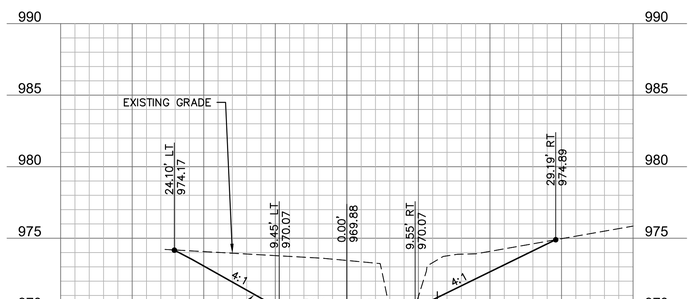

100+50

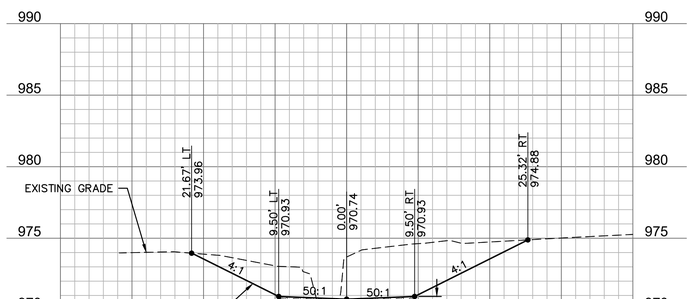

101+25

olsson

Olsson, INC. Engineering MO State Cert. of Authority #001592
500 St. Louis St.
Springfield, MO 65806
TEL 417.890.8802
www.olsson.com

NOT FOR CONSTRUCTION

FOR PRELIMINARY REVIEW ONLY. NOT FOR BIDDING, PERMITTING OR CONSTRUCTION.

REV. NO.	DATE	REVISIONS DESCRIPTION
NO.	DATE	DESCR.

REVISIONS

CHANNEL CROSS SECTIONS

VALLEY STREET & DIVISION AVENUE
STORMWATER IMPROVEMENTS

JOPLIN, MISSOURI

2024

10"


Action No.: SWL 2024-00223
City of Joplin Public Works
East Town Stormwater Improvement &
Cox Avenue Culvert Project
Jasper County, Missouri
November 2024

DWG: F:\2023\00501-01000\023-00749-B\40-Design\AutoCAD\Final Plans\Sheets\WTRS\W_XSC01_B2300749.dwg USER: nmcneal
DATE: Jul 11, 2024 5:09pm XREFS: W_XBASE_B2300749 V_XBNDY_B2300749 W_PTBLK_B2300749 T_PBASE_B2300749 W_PBASE_B2300749


PROPOSED CHANNEL

CROSS SECTIONS


NOTE: CROSS SECTIONS LOOKING UPSTREAM

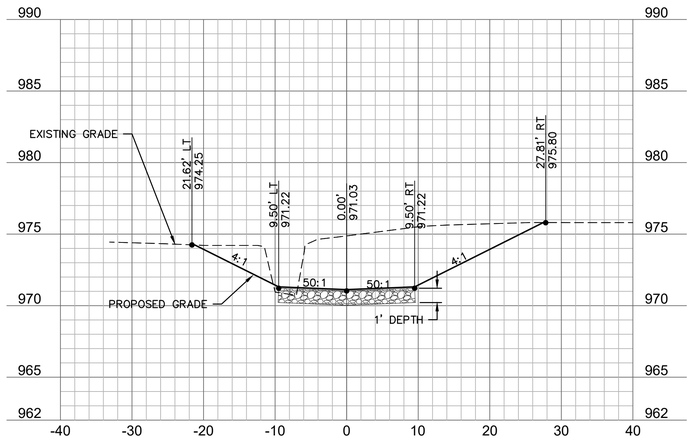

101+50

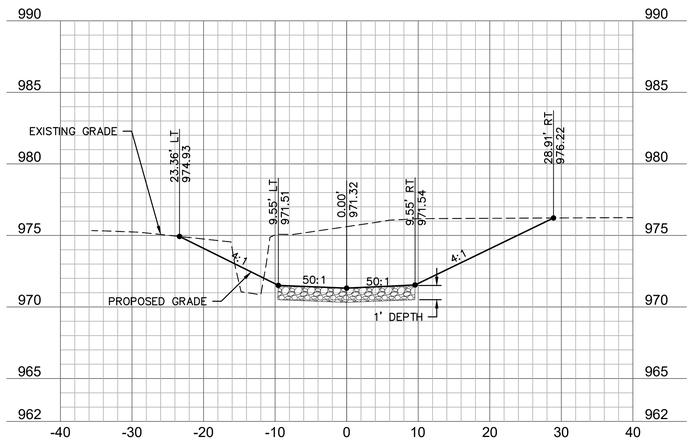

101+75

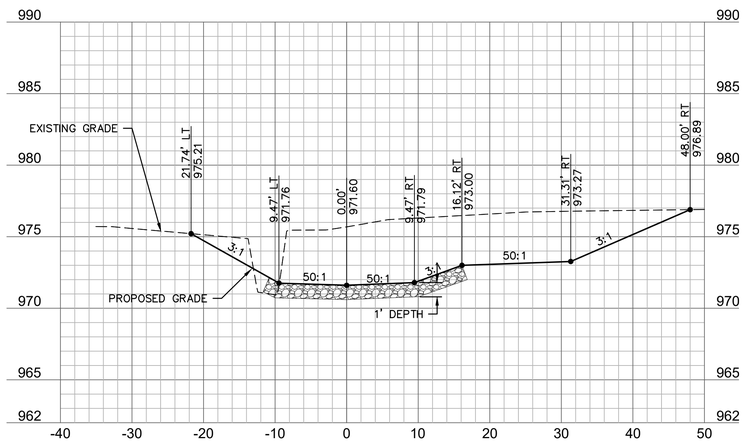

102+00

olsson

Olsson INC. Engineering MO State Cert. of Authority #001592
500 St. Louis St.
Springfield, MO 65806
TEL 417.890.8802
www.olsson.com

NOT FOR CONSTRUCTION

FOR PRELIMINARY REVIEW ONLY. NOT FOR BIDDING, PERMITTING OR CONSTRUCTION.

REV/ NO.	DATE	REVISIONS DESCRIPTION
NO.	DATE	DESCR.

REVISIONS

CHANNEL CROSS SECTIONS

VALLEY STREET & DIVISION AVENUE
STORMWATER IMPROVEMENTS

PLIN, MISSOURI

2024

8"

Action No.: SWL 2024-00223
City of Joplin Public Works
East Town Stormwater Improvement &
Cox Avenue Culvert Project
Jasper County, Missouri
November 2024

DWG: F:\2023\00501-01000\023-00749-B\40-Design\AutoCAD\Final Plans\Sheets\WTRS\W_XSC01_B2300749.dwg USER: nmcneal
DATE: Jul 11, 2024 5:09pm XREFS: W_XBASE_B2300749 V_XBNDY_B2300749 W_PTBLK_B2300749 T_PBASE_B2300749 W_PBASE_B2300749

MISSOURI STREAM METHOD
ADVERSE IMPACT FACTORS FOR RIVERINE SYSTEM WORKSHEET

Stream Type Impacted	Ephemeral 0.3		Intermittent 0.4		Perennial (less than 500 square miles of drainage) 0.8		Perennial (more than 500 square miles of drainage) 1.2		
Priority Waters	Tertiary 0.1			Secondary 0.4			Primary 0.8		
Existing Condition	Functionally Impaired 0.1			Moderately Functional 0.8			Fully Functional 1.6		
Impact Duration	Temporary 0.05			Permanent 0.3					
Impact Activity	Clearing 0.05	Utility Crossing/Bridge Footing 0.15	Below Grade Culvert 0.3	Armor 0.5	Detention facility 0.75	Morphologic Change 1.5	Impoundment 2.0	Pipe 2.2	Fill 2.5
Linear Impact Calculation	0.0002 multiplied by linear feet of stream impact recorded in each column below								

Factor	Morphologic Change	Box Culvert (Pipe)	Box Culvert (Fill)		
Stream Type Impacted	Intermittent	Intermittent	Intermittent		
Priority Waters	Tertiary	Tertiary	Tertiary		
Existing Conditions	Funct. Impaired	Funct. Impaired	Funct. Impaired		
Impact Duration	Permanent	Permanent	Permanent		
Impact Activity	Morphological Change	Pipe	Fill		
Linear Impact Calculation	0.072	0.008	0.012		
Sum of Factors (M)	2.472	3.108	3.412		
Linear Feet of Stream Impact (LF)	360	40	60		
Credits (C) = M x LF	889.92	124.32	204.72		
*Compensation Ratio X (C)	1				

Total Mitigation Credits Required = (M x LF) = 1,218.96

*** Compensation Ratio** - when the Corps determines that a third party mitigation source is acceptable to fulfill compensatory mitigation requirements the total credits determined on this worksheet shall be applied to mitigation banks or in-lieu fee programs at a 1:1 ratio when the impact area is within an approved service area. However, an increased compensation ratio may be used at the Corps discretion when an impact occurs beyond the geographic service area of an approved mitigation bank or in-lieu fee program.

Notes:

Application #: SWL 2024-00223

Nationwide Permit No. 14

Linear Transportation Projects. Activities required for crossings of waters of the United States associated with the construction, expansion, modification, or improvement of linear transportation projects (e.g., roads, highways, railways, trails, driveways, airport runways, and taxiways) in waters of the United States. For linear transportation projects in non-tidal waters, the discharge of dredged or fill material cannot cause the loss of greater than 1/2-acre of waters of the United States. For linear transportation projects in tidal waters, the discharge of dredged or fill material cannot cause the loss of greater than 1/3-acre of waters of the United States. Any stream channel modification, including bank stabilization, is limited to the minimum necessary to construct or protect the linear transportation project; such modifications must be in the immediate vicinity of the project.

This NWP also authorizes temporary structures, fills, and work, including the use of temporary mats, necessary to construct the linear transportation project. Appropriate measures must be taken to maintain normal downstream flows and minimize flooding to the maximum extent practicable, when temporary structures, work, and discharges of dredged or fill material, including cofferdams, are necessary for construction activities, access fills, or dewatering of construction sites. Temporary fills must consist of materials, and be placed in a manner, that will not be eroded by expected high flows. Temporary fills must be removed in their entirety and the affected areas returned to pre-construction elevations. The areas affected by temporary fills must be revegetated, as appropriate.

This NWP cannot be used to authorize non-linear features commonly associated with transportation projects, such as vehicle maintenance or storage buildings, parking lots, train stations, or aircraft hangars.

Notification: The permittee must submit a pre-construction notification to the district engineer prior to commencing the activity if: (1) the loss of waters of the United States exceeds 1/10-acre; or (2) there is a discharge of dredged or fill material in a special aquatic site, including wetlands. (See general condition 32.) (Authorities: Sections 10 and 404)

Note 1: For linear transportation projects crossing a single waterbody more than one time at separate and distant locations, or multiple waterbodies at separate and distant locations, each crossing is considered a single and complete project for purposes of NWP authorization. Linear transportation projects must comply with 33 CFR 330.6(d).

Note 2: Some discharges of dredged or fill material for the construction of farm roads or forest roads, or temporary roads for moving mining equipment, may qualify for an exemption under Section 404(f) of the Clean Water Act (see 33 CFR 323.4).

Note 3: For NWP 14 activities that require pre-construction notification, the PCN must include any other NWP(s), regional general permit(s), or individual permit(s) used or intended to be used to authorize any part of the proposed project or any related activity, including other separate and distant crossings that require Department of the Army authorization but do not require pre-construction notification (see paragraph (b)(4) of general condition 32). The district engineer will evaluate the PCN in accordance with Section D, "District Engineer's Decision." The district engineer may require mitigation to ensure that the authorized activity results in no more than minimal individual and cumulative adverse environmental effects (see general condition 23)

2021 Nationwide Permit General Conditions

Note: To qualify for NWP authorization, the prospective permittee must comply with the following general conditions, as applicable, in addition to any regional or case-specific conditions imposed by the division engineer or district engineer. Prospective permittees should contact the appropriate Corps district office to determine if regional conditions have been imposed on an NWP. Prospective permittees should also contact the appropriate Corps district office to determine the status of Clean Water Act Section 401 water quality certification and/or Coastal Zone Management Act consistency for an NWP. Every person who may wish to obtain permit authorization under one or more NWPs, or who is currently relying on an existing or prior permit authorization under one or more NWPs, has been and is on notice that all of the provisions of 33 CFR 330.1 through 330.6 apply to every NWP authorization. Note especially 33 CFR 330.5 relating to the modification, suspension, or revocation of any NWP authorization.

1. Navigation. (a) No activity may cause more than a minimal adverse effect on navigation.

(b) Any safety lights and signals prescribed by the U.S. Coast Guard, through regulations or otherwise, must be installed and maintained at the permittee's

expense on authorized facilities in navigable waters of the United States.

(c) The permittee understands and agrees that, if future operations by the United States require the removal, relocation, or other alteration, of the structure or work herein authorized, or if, in the opinion of the Secretary of the Army or his or her authorized representative, said structure or work shall cause unreasonable obstruction to the free navigation of the navigable waters, the permittee will be required, upon due notice from the Corps of Engineers, to remove, relocate, or alter the structural work or obstructions caused thereby, without expense to the United States. No claim shall be made against the United States on account of any such removal or alteration.

2. Aquatic Life Movements. No activity may substantially disrupt the necessary life cycle movements of those species of aquatic life indigenous to the waterbody, including those species that normally migrate through the area, unless the activity's primary purpose is to impound water. All permanent and temporary crossings of waterbodies shall be suitably culverted, bridged, or otherwise designed and constructed to maintain low flows to sustain the movement of those aquatic species. If a bottomless culvert cannot be used, then the crossing should be designed and constructed to minimize adverse effects to aquatic life movements.

3. Spawning Areas. Activities in spawning areas during spawning seasons must be avoided to the maximum extent practicable. Activities that result in the physical destruction (e.g., through excavation, fill, or downstream smothering by substantial turbidity) of an important spawning area are not authorized.

4. Migratory Bird Breeding Areas. Activities in waters of the United States that serve as breeding areas for migratory birds must be avoided to the maximum extent practicable.

5. Shellfish Beds. No activity may occur in areas of concentrated shellfish populations, unless the activity is directly related to a shellfish harvesting activity authorized by NWPs 4 and 48 or is a shellfish seeding or habitat restoration activity authorized by NWP 27.

6. Suitable Material. No activity may use unsuitable material (e.g., trash, debris, car bodies, asphalt, etc.). Material used for construction or discharged must be free from toxic pollutants in toxic amounts (see section 307 of the Clean Water Act).

7. Water Supply Intakes. No activity may occur in the proximity of a public water supply intake, except where the activity is for the repair or improvement of public water supply intake structures or adjacent bank stabilization.

8. Adverse Effects From Impoundments. If the activity creates an impoundment of water, adverse effects to the aquatic system due to accelerating the passage of water, and/or restricting its flow must be minimized to the maximum extent practicable.

9. Management of Water Flows. To the maximum extent practicable, the pre-construction course, condition, capacity, and location of open waters must be maintained for each activity, including stream channelization, storm water management activities, and temporary and permanent road crossings, except as provided below. The activity must be constructed to withstand expected high flows. The activity must not restrict or impede the passage of normal or high flows, unless the primary purpose of the activity is to impound water or manage high flows. The activity may alter the pre-construction course, condition, capacity, and location of open waters if it benefits the aquatic environment (e.g., stream restoration or relocation activities).

10. Fills Within 100-Year Floodplains. The activity must comply with applicable FEMA-approved state or local floodplain management requirements.

11. Equipment. Heavy equipment working in wetlands or mudflats must be placed on mats, or other measures must be taken to minimize soil disturbance.

12. Soil Erosion and Sediment Controls. Appropriate soil erosion and sediment controls must be used and maintained in effective operating condition during construction, and all exposed soil and other fills, as well as any work below the ordinary high water mark or high tide line, must be permanently stabilized at the earliest practicable date. Permittees are encouraged to perform work within waters of the United States during periods of low-flow or no-flow, or during low tides.

13. Removal of Temporary Structures and Fills. Temporary structures must be removed, to the maximum extent practicable, after their use has been discontinued. Temporary fills must be removed in their entirety and the affected areas returned to pre-

construction elevations. The affected areas must be revegetated, as appropriate.

14. Proper Maintenance. Any authorized structure or fill shall be properly maintained, including maintenance to ensure public safety and compliance with applicable NWP general conditions, as well as any activity-specific conditions added by the district engineer to an NWP authorization.

15. Single and Complete Project. The activity must be a single and complete project. The same NWP cannot be used more than once for the same single and complete project.

16. Wild and Scenic Rivers. (a) No NWP activity may occur in a component of the National Wild and Scenic River System, or in a river officially designated by Congress as a "study river" for possible inclusion in the system while the river is in an official study status, unless the appropriate Federal agency with direct management responsibility for such river, has determined in writing that the proposed activity will not adversely affect the Wild and Scenic River designation or study status.

(b) If a proposed NWP activity will occur in a component of the National Wild and Scenic River System, or in a river officially designated by Congress as a "study river" for possible inclusion in the system while the river is in an official study status, the permittee must submit a pre-construction notification (see general condition 32). The district engineer will coordinate the PCN with the Federal agency with direct management responsibility for that river. Permittees shall not begin the NWP activity until notified by the district engineer that the Federal agency with direct management responsibility for that river has determined in writing that the proposed NWP activity will not adversely affect the Wild and Scenic River designation or study status.

(c) Information on Wild and Scenic Rivers may be obtained from the appropriate Federal land management agency responsible for the designated Wild and Scenic River or study river (e.g., National Park Service, U.S. Forest Service, Bureau of Land Management, U.S. Fish and Wildlife Service). Information on these rivers is also available at: http://www.rivers.gov/.

17. Tribal Rights. No activity or its operation may impair reserved tribal rights, including, but not limited to, reserved water rights and treaty fishing and hunting rights.

18. Endangered Species. (a) No activity is authorized under any NWP which is likely to directly or indirectly jeopardize the continued existence of a threatened or endangered species or a species proposed for such designation, as identified under the Federal Endangered Species Act (ESA), or which will directly or indirectly destroy or adversely modify designated critical habitat or critical habitat proposed for such designation. No activity is authorized under any NWP which "may affect" a listed species or critical habitat, unless ESA section 7 consultation addressing the consequences of the proposed activity on listed species or critical habitat has been completed. See 50 CFR 402.02 for the definition of "effects of the action" for the purposes of ESA section 7 consultation, as well as 50 CFR 402.17, which provides further explanation under ESA section 7 regarding "activities that are reasonably certain to occur" and "consequences caused by the proposed action."

(b) Federal agencies should follow their own procedures for complying with the requirements of the ESA (see 33 CFR 330.4(f)(1)). If pre-construction notification is required for the proposed activity, the Federal permittee must provide the district engineer with the appropriate documentation to demonstrate compliance with those requirements. The district engineer will verify that the appropriate documentation has been submitted. If the appropriate documentation has not been submitted, additional ESA section 7 consultation may be necessary for the activity and the respective federal agency would be responsible for fulfilling its obligation under section 7 of the ESA.

(c) Non-federal permittees must submit a pre-construction notification to the district engineer if any listed species (or species proposed for listing) or designated critical habitat (or critical habitat proposed such designation) might be affected or is in the vicinity of the activity, or if the activity is located in designated critical habitat or critical habitat proposed for such designation, and shall not begin work on the activity until notified by the district engineer that the requirements of the ESA have been satisfied and that the activity is authorized. For activities that might affect Federally-listed endangered or threatened species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation), the pre-construction notification must include the name(s) of the endangered or threatened species (or species proposed for listing) that might be affected by the proposed activity or that utilize the designated critical habitat (or critical habitat proposed for such

designation) that might be affected by the proposed activity. The district engineer will determine whether the proposed activity "may affect" or will have "no effect" to listed species and designated critical habitat and will notify the non-Federal applicant of the Corps' determination within 45 days of receipt of a complete pre-construction notification. For activities where the non-Federal applicant has identified listed species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation) that might be affected or is in the vicinity of the activity, and has so notified the Corps, the applicant shall not begin work until the Corps has provided notification that the proposed activity will have "no effect" on listed species (or species proposed for listing or designated critical habitat (or critical habitat proposed for such designation), or until ESA section 7 consultation or conference has been completed. If the non-Federal applicant has not heard back from the Corps within 45 days, the applicant must still wait for notification from the Corps.

(d) As a result of formal or informal consultation or conference with the FWS or NMFS the district engineer may add species-specific permit conditions to the NWPs.

(e) Authorization of an activity by an NWP does not authorize the "take" of a threatened or endangered species as defined under the ESA. In the absence of separate authorization (e.g., an ESA Section 10 Permit, a Biological Opinion with "incidental take" provisions, etc.) from the FWS or the NMFS, the Endangered Species Act prohibits any person subject to the jurisdiction of the United States to take a listed species, where "take" means to harass, harm, pursue, hunt, shoot, wound, kill, trap, capture, or collect, or to attempt to engage in any such conduct. The word "harm" in the definition of "take" means an act which actually kills or injures wildlife. Such an act may include significant habitat modification or degradation where it actually kills or injures wildlife by significantly impairing essential behavioral patterns, including breeding, feeding or sheltering.

(f) If the non-federal permittee has a valid ESA section 10(a)(1)(B) incidental take permit with an approved Habitat Conservation Plan for a project or a group of projects that includes the proposed NWP activity, the non-federal applicant should provide a copy of that ESA section 10(a)(1)(B) permit with the PCN required by paragraph (c) of this general condition. The district engineer will coordinate with the agency that issued the ESA section 10(a)(1)(B) permit to determine whether the proposed NWP activity and the associated incidental take were considered in the internal ESA section 7 consultation conducted for the ESA section 10(a)(1)(B) permit. If that coordination results in concurrence from the agency that the proposed NWP activity and the associated incidental take were considered in the internal ESA section 7 consultation for the ESA section 10(a)(1)(B) permit, the district engineer does not need to conduct a separate ESA section 7 consultation for the proposed NWP activity. The district engineer will notify the non-federal applicant within 45 days of receipt of a complete pre-construction notification whether the ESA section 10(a)(1)(B) permit covers the proposed NWP activity or whether additional ESA section 7 consultation is required.

(g) Information on the location of threatened and endangered species and their critical habitat can be obtained directly from the offices of the FWS and NMFS or their world wide web pages at http://www.fws.gov/ or http://www.fws.gov/ipac and http://www.nmfs.noaa.gov/pr/species/esa/ respectively.

19. Migratory Birds and Bald and Golden Eagles. The permittee is responsible for ensuring that an action authorized by an NWP complies with the Migratory Bird Treaty Act and the Bald and Golden Eagle Protection Act. The permittee is responsible for contacting the appropriate local office of the U.S. Fish and Wildlife Service to determine what measures, if any, are necessary or appropriate to reduce adverse effects to migratory birds or eagles, including whether "incidental take" permits are necessary and available under the Migratory Bird Treaty Act or Bald and Golden Eagle Protection Act for a particular activity.

20. Historic Properties. (a) No activity is authorized under any NWP which may have the potential to cause effects to properties listed, or eligible for listing, in the National Register of Historic Places until the requirements of Section 106 of the National Historic Preservation Act (NHPA) have been satisfied.

(b) Federal permittees should follow their own procedures for complying with the requirements of section 106 of the National Historic Preservation Act (see 33 CFR 330.4(g)(1)). If pre-construction notification is required for the proposed NWP activity, the Federal permittee must provide the district engineer with the appropriate documentation to demonstrate compliance with those requirements. The district engineer will verify that the appropriate

documentation has been submitted. If the appropriate documentation is not submitted, then additional consultation under section 106 may be necessary. The respective federal agency is responsible for fulfilling its obligation to comply with section 106.

(c) Non-federal permittees must submit a pre-construction notification to the district engineer if the NWP activity might have the potential to cause effects to any historic properties listed on, determined to be eligible for listing on, or potentially eligible for listing on the National Register of Historic Places, including previously unidentified properties. For such activities, the pre-construction notification must state which historic properties might have the potential to be affected by the proposed NWP activity or include a vicinity map indicating the location of the historic properties or the potential for the presence of historic properties. Assistance regarding information on the location of, or potential for, the presence of historic properties can be sought from the State Historic Preservation Officer, Tribal Historic Preservation Officer, or designated tribal representative, as appropriate, and the National Register of Historic Places (see 33 CFR 330.4(g)). When reviewing pre-construction notifications, district engineers will comply with the current procedures for addressing the requirements of section 106 of the National Historic Preservation Act. The district engineer shall make a reasonable and good faith effort to carry out appropriate identification efforts commensurate with potential impacts, which may include background research, consultation, oral history interviews, sample field investigation, and/or field survey. Based on the information submitted in the PCN and these identification efforts, the district engineer shall determine whether the proposed NWP activity has the potential to cause effects on the historic properties. Section 106 consultation is not required when the district engineer determines that the activity does not have the potential to cause effects on historic properties (see 36 CFR 800.3(a)). Section 106 consultation is required when the district engineer determines that the activity has the potential to cause effects on historic properties. The district engineer will conduct consultation with consulting parties identified under 36 CFR 800.2(c) when he or she makes any of the following effect determinations for the purposes of section 106 of the NHPA: no historic properties affected, no adverse effect, or adverse effect.

(d) Where the non-Federal applicant has identified historic properties on which the proposed NWP activity might have the potential to cause effects and has so notified the Corps, the non-Federal applicant shall not begin the activity until notified by the district engineer either that the activity has no potential to cause effects to historic properties or that NHPA section 106 consultation has been completed. For non-federal permittees, the district engineer will notify the prospective permittee within 45 days of receipt of a complete pre-construction notification whether NHPA section 106 consultation is required. If NHPA section 106 consultation is required, the district engineer will notify the non-Federal applicant that he or she cannot begin the activity until section 106 consultation is completed. If the non-Federal applicant has not heard back from the Corps within 45 days, the applicant must still wait for notification from the Corps.

(e) Prospective permittees should be aware that section 110k of the NHPA (54 U.S.C. 306113) prevents the Corps from granting a permit or other assistance to an applicant who, with intent to avoid the requirements of section 106 of the NHPA, has intentionally significantly adversely affected a historic property to which the permit would relate, or having legal power to prevent it, allowed such significant adverse effect to occur, unless the Corps, after consultation with the Advisory Council on Historic Preservation (ACHP), determines that circumstances justify granting such assistance despite the adverse effect created or permitted by the applicant. If circumstances justify granting the assistance, the Corps is required to notify the ACHP and provide documentation specifying the circumstances, the degree of damage to the integrity of any historic properties affected, and proposed mitigation. This documentation must include any views obtained from the applicant, SHPO/THPO, appropriate Indian tribes if the undertaking occurs on or affects historic properties on tribal lands or affects properties of interest to those tribes, and other parties known to have a legitimate interest in the impacts to the permitted activity on historic properties.

21. Discovery of Previously Unknown Remains and Artifacts. Permittees that discover any previously unknown historic, cultural, or archeological remains and artifacts while accomplishing the activity authorized by an NWP, they must immediately notify the district engineer of what they have found, and to the maximum extent practicable, avoid construction activities that may affect the remains and artifacts until the required coordination has been completed. The district engineer will initiate the Federal, Tribal, and state coordination required to determine if the items or remains warrant a recovery effort or if the site is eligible for listing in the National Register of Historic Places.

22. Designated Critical Resource Waters. Critical resource waters include, NOAA-managed marine sanctuaries and marine monuments, and National Estuarine Research Reserves. The district engineer may designate, after notice and opportunity for public comment, additional waters officially designated by a state as having particular environmental or ecological significance, such as outstanding national resource waters or state natural heritage sites. The district engineer may also designate additional critical resource waters after notice and opportunity for public comment.

(a) Discharges of dredged or fill material into waters of the United States are not authorized by NWPs 7, 12, 14, 16, 17, 21, 29, 31, 35, 39, 40, 42, 43, 44, 49, 50, 51, 52, 57 and 58 for any activity within, or directly affecting, critical resource waters, including wetlands adjacent to such waters.

(b) For NWPs 3, 8, 10, 13, 15, 18, 19, 22, 23, 25, 27, 28, 30, 33, 34, 36, 37, 38, and 54, notification is required in accordance with general condition 32, for any activity proposed by permittees in the designated critical resource waters including wetlands adjacent to those waters. The district engineer may authorize activities under these NWPs only after she or he determines that the impacts to the critical resource waters will be no more than minimal.

23. Mitigation. The district engineer will consider the following factors when determining appropriate and practicable mitigation necessary to ensure that the individual and cumulative adverse environmental effects are no more than minimal:

(a) The activity must be designed and constructed to avoid and minimize adverse effects, both temporary and permanent, to waters of the United States to the maximum extent practicable at the project site (i.e., on site).

(b) Mitigation in all its forms (avoiding, minimizing, rectifying, reducing, or compensating for resource losses) will be required to the extent necessary to ensure that the individual and cumulative adverse environmental effects are no more than minimal.

(c) Compensatory mitigation at a minimum one-for-one ratio will be required for all wetland losses that exceed 1/10-acre and require pre-construction notification, unless the district engineer determines in writing that either some other form of mitigation would be more environmentally appropriate, or the adverse environmental effects of the proposed activity are no more than minimal and provides an activity-specific waiver of this requirement. For wetland losses of 1/10-acre or less that require pre-construction notification, the district engineer may determine on a case-by-case basis that compensatory mitigation is required to ensure that the activity results in only minimal adverse environmental effects.

(d) Compensatory mitigation at a minimum one-for-one ratio will be required for all losses of stream bed that exceed 3/100-acre and require pre-construction notification, unless the district engineer determines in writing that either some other form of mitigation would be more environmentally appropriate, or the adverse environmental effects of the proposed activity are no more than minimal and provides an activity-specific waiver of this requirement. This compensatory mitigation requirement may be satisfied through the restoration or enhancement of riparian areas next to streams in accordance with paragraph (e) of this general condition. For losses of stream bed of 3/100-acre or less that require pre-construction notification, the district engineer may determine on a case-by-case basis that compensatory mitigation is required to ensure that the activity results in only minimal adverse environmental effects. Compensatory mitigation for losses of streams should be provided, if practicable, through stream rehabilitation, enhancement, or preservation since streams are difficult-to-replace resources (see 33 CFR 332.3(e)(3)).

(e) Compensatory mitigation plans for NWP activities in or near streams or other open waters will normally include a requirement for the restoration or enhancement, maintenance, and legal protection (e.g., conservation easements) of riparian areas next to open waters. In some cases, the restoration or maintenance/protection of riparian areas may be the only compensatory mitigation required. If restoring riparian areas involves planting vegetation, only native species should be planted. The width of the required riparian area will address documented water quality or aquatic habitat loss concerns. Normally, the riparian area will be 25 to 50 feet wide on each side of the stream, but the district engineer may require slightly wider riparian areas to address documented water quality or habitat loss concerns. If it is not possible to restore or maintain/protect a riparian area on both sides of a stream, or if the waterbody is a lake or coastal waters, then restoring or maintaining/protecting a riparian area along a single bank or shoreline may be sufficient. Where both wetlands and open waters exist on the project site, the district engineer will determine the appropriate compensatory mitigation (e.g., riparian

areas and/or wetlands compensation) based on what is best for the aquatic environment on a watershed basis. In cases where riparian areas are determined to be the most appropriate form of minimization or compensatory mitigation, the district engineer may waive or reduce the requirement to provide wetland compensatory mitigation for wetland losses.

(f) Compensatory mitigation projects provided to offset losses of aquatic resources must comply with the applicable provisions of 33 CFR part 332.

(1) The prospective permittee is responsible for proposing an appropriate compensatory mitigation option if compensatory mitigation is necessary to ensure that the activity results in no more than minimal adverse environmental effects. For the NWPs, the preferred mechanism for providing compensatory mitigation is mitigation bank credits or in-lieu fee program credits (see 33 CFR 332.3(b)(2) and (3)). However, if an appropriate number and type of mitigation bank or in-lieu credits are not available at the time the PCN is submitted to the district engineer, the district engineer may approve the use of permittee-responsible mitigation.

(2) The amount of compensatory mitigation required by the district engineer must be sufficient to ensure that the authorized activity results in no more than minimal individual and cumulative adverse environmental effects (see 33 CFR 330.1(e)(3)). (See also 33 CFR 332.3(f).)

(3) Since the likelihood of success is greater and the impacts to potentially valuable uplands are reduced, aquatic resource restoration should be the first compensatory mitigation option considered for permittee-responsible mitigation.

(4) If permittee-responsible mitigation is the proposed option, the prospective permittee is responsible for submitting a mitigation plan. A conceptual or detailed mitigation plan may be used by the district engineer to make the decision on the NWP verification request, but a final mitigation plan that addresses the applicable requirements of 33 CFR 332.4(c)(2) through (14) must be approved by the district engineer before the permittee begins work in waters of the United States, unless the district engineer determines that prior approval of the final mitigation plan is not practicable or not necessary to ensure timely completion of the required compensatory mitigation (see 33 CFR 332.3(k)(3)). If permittee-responsible mitigation is the proposed option, and the proposed compensatory mitigation site is located on land in which another federal agency holds an easement, the district engineer will coordinate with that federal agency to determine if proposed compensatory mitigation project is compatible with the terms of the easement.

(5) If mitigation bank or in-lieu fee program credits are the proposed option, the mitigation plan needs to address only the baseline conditions at the impact site and the number of credits to be provided (see 33 CFR 332.4(c)(1)(ii)).

(6) Compensatory mitigation requirements (e.g., resource type and amount to be provided as compensatory mitigation, site protection, ecological performance standards, monitoring requirements) may be addressed through conditions added to the NWP authorization, instead of components of a compensatory mitigation plan (see 33 CFR 332.4(c)(1)(ii)).

(g) Compensatory mitigation will not be used to increase the acreage losses allowed by the acreage limits of the NWPs. For example, if an NWP has an acreage limit of 1/2-acre, it cannot be used to authorize any NWP activity resulting in the loss of greater than 1/2-acre of waters of the United States, even if compensatory mitigation is provided that replaces or restores some of the lost waters. However, compensatory mitigation can and should be used, as necessary, to ensure that an NWP activity already meeting the established acreage limits also satisfies the no more than minimal impact requirement for the NWPs.

(h) Permittees may propose the use of mitigation banks, in-lieu fee programs, or permittee-responsible mitigation. When developing a compensatory mitigation proposal, the permittee must consider appropriate and practicable options consistent with the framework at 33 CFR 332.3(b). For activities resulting in the loss of marine or estuarine resources, permittee-responsible mitigation may be environmentally preferable if there are no mitigation banks or in-lieu fee programs in the area that have marine or estuarine credits available for sale or transfer to the permittee. For permittee-responsible mitigation, the special conditions of the NWP verification must clearly indicate the party or parties responsible for the implementation and performance of the compensatory mitigation project, and, if required, its long-term management.

(i) Where certain functions and services of waters of the United States are permanently adversely affected by a regulated activity, such as discharges of dredged or fill material into waters of the United States that

will convert a forested or scrub-shrub wetland to a herbaceous wetland in a permanently maintained utility line right-of-way, mitigation may be required to reduce the adverse environmental effects of the activity to the no more than minimal level.

24. Safety of Impoundment Structures. To ensure that all impoundment structures are safely designed, the district engineer may require non-Federal applicants to demonstrate that the structures comply with established state or federal, dam safety criteria or have been designed by qualified persons. The district engineer may also require documentation that the design has been independently reviewed by similarly qualified persons, and appropriate modifications made to ensure safety.

25. Water Quality. (a) Where the certifying authority (state, authorized tribe, or EPA, as appropriate) has not previously certified compliance of an NWP with CWA section 401, a CWA section 401 water quality certification for the proposed discharge must be obtained or waived (see 33 CFR 330.4(c)). If the permittee cannot comply with all of the conditions of a water quality certification previously issued by certifying authority for the issuance of the NWP, then the permittee must obtain a water quality certification or waiver for the proposed discharge in order for the activity to be authorized by an NWP.

(b) If the NWP activity requires pre-construction notification and the certifying authority has not previously certified compliance of an NWP with CWA section 401, the proposed discharge is not authorized by an NWP until water quality certification is obtained or waived. If the certifying authority issues a water quality certification for the proposed discharge, the permittee must submit a copy of the certification to the district engineer. The discharge is not authorized by an NWP until the district engineer has notified the permittee that the water quality certification requirement has been satisfied by the issuance of a water quality certification or a waiver.

(c) The district engineer or certifying authority may require additional water quality management measures to ensure that the authorized activity does not result in more than minimal degradation of water quality.

26. Coastal Zone Management. In coastal states where an NWP has not previously received a state coastal zone management consistency concurrence, an individual state coastal zone management consistency concurrence must be obtained, or a presumption of concurrence must occur (see 33 CFR 330.4(d)). If the permittee cannot comply with all of the conditions of a coastal zone management consistency concurrence previously issued by the state, then the permittee must obtain an individual coastal zone management consistency concurrence or presumption of concurrence in order for the activity to be authorized by an NWP. The district engineer or a state may require additional measures to ensure that the authorized activity is consistent with state coastal zone management requirements.

27. Regional and Case-By-Case Conditions. The activity must comply with any regional conditions that may have been added by the Division Engineer (see 33 CFR 330.4(e)) and with any case specific conditions added by the Corps or by the state, Indian Tribe, or U.S. EPA in its CWA section 401 Water Quality Certification, or by the state in its Coastal Zone Management Act consistency determination.

28. Use of Multiple Nationwide Permits. The use of more than one NWP for a single and complete project is authorized, subject to the following restrictions:

(a) If only one of the NWPs used to authorize the single and complete project has a specified acreage limit, the acreage loss of waters of the United States cannot exceed the acreage limit of the NWP with the highest specified acreage limit. For example, if a road crossing over tidal waters is constructed under NWP 14, with associated bank stabilization authorized by NWP 13, the maximum acreage loss of waters of the United States for the total project cannot exceed 1/3-acre.

(b) If one or more of the NWPs used to authorize the single and complete project has specified acreage limits, the acreage loss of waters of the United States authorized by those NWPs cannot exceed their respective specified acreage limits. For example, if a commercial development is constructed under NWP 39, and the single and complete project includes the filling of an upland ditch authorized by NWP 46, the maximum acreage loss of waters of the United States for the commercial development under NWP 39 cannot exceed 1/2-acre, and the total acreage loss of waters of United States due to the NWP 39 and 46 activities cannot exceed 1 acre.

29. Transfer of Nationwide Permit Verifications. If the permittee sells the property associated with a nationwide permit verification, the permittee may transfer the nationwide permit verification to the new owner by submitting a letter to the appropriate Corps district office to validate the transfer. A copy of the

nationwide permit verification must be attached to the letter, and the letter must contain the following statement and signature:

"When the structures or work authorized by this nationwide permit are still in existence at the time the property is transferred, the terms and conditions of this nationwide permit, including any special conditions, will continue to be binding on the new owner(s) of the property. To validate the transfer of this nationwide permit and the associated liabilities associated with compliance with its terms and conditions, have the transferee sign and date below."

_____

(Transferee)

_____

(Date)

30. Compliance Certification. Each permittee who receives an NWP verification letter from the Corps must provide a signed certification documenting completion of the authorized activity and implementation of any required compensatory mitigation. The success of any required permittee-responsible mitigation, including the achievement of ecological performance standards, will be addressed separately by the district engineer. The Corps will provide the permittee the certification document with the NWP verification letter. The certification document will include:

(a) A statement that the authorized activity was done in accordance with the NWP authorization, including any general, regional, or activity-specific conditions;

(b) A statement that the implementation of any required compensatory mitigation was completed in accordance with the permit conditions. If credits from a mitigation bank or in-lieu fee program are used to satisfy the compensatory mitigation requirements, the certification must include the documentation required by 33 CFR 332.3(l)(3) to confirm that the permittee secured the appropriate number and resource type of credits; and

(c) The signature of the permittee certifying the completion of the activity and mitigation.

The completed certification document must be submitted to the district engineer within 30 days of completion of the authorized activity or the implementation of any required compensatory mitigation, whichever occurs later.

31. Activities Affecting Structures or Works Built by the United States. If an NWP activity also requires review by, or permission from, the Corps pursuant to 33 U.S.C. 408 because it will alter or temporarily or permanently occupy or use a U.S. Army Corps of Engineers (USACE) federally authorized Civil Works project (a "USACE project"), the prospective permittee must submit a pre-construction notification. See paragraph (b)(10) of general condition 32. An activity that requires section 408 permission and/or review is not authorized by an NWP until the appropriate Corps office issues the section 408 permission or completes its review to alter, occupy, or use the USACE project, and the district engineer issues a written NWP verification.

32. Pre-Construction Notification. (a) Timing. Where required by the terms of the NWP, the prospective permittee must notify the district engineer by submitting a pre-construction notification (PCN) as early as possible. The district engineer must determine if the PCN is complete within 30 calendar days of the date of receipt and, if the PCN is determined to be incomplete, notify the prospective permittee within that 30-day period to request the additional information necessary to make the PCN complete. The request must specify the information needed to make the PCN complete. As a general rule, district engineers will request additional information necessary to make the PCN complete only once. However, if the prospective permittee does not provide all of the requested information, then the district engineer will notify the prospective permittee that the PCN is still incomplete and the PCN review process will not commence until all of the requested information has been received by the district engineer. The prospective permittee shall not begin the activity until either:

(1) He or she is notified in writing by the district engineer that the activity may proceed under the NWP with any special conditions imposed by the district or division engineer; or

(2) 45 calendar days have passed from the district engineer's receipt of the complete PCN, and the prospective permittee has not received written notice from the district or division engineer. However, if the permittee was required to notify the Corps pursuant to general condition 18 that listed species or critical habitat might be affected or are in the vicinity of the activity, or to notify the Corps pursuant to general condition 20 that the activity might have the

potential to cause effects to historic properties, the permittee cannot begin the activity until receiving written notification from the Corps that there is "no effect" on listed species or "no potential to cause effects" on historic properties, or that any consultation required under Section 7 of the Endangered Species Act (see 33 CFR 330.4(f)) and/or section 106 of the National Historic Preservation Act (see 33 CFR 330.4(g)) has been completed. If the proposed activity requires a written waiver to exceed specified limits of an NWP, the permittee may not begin the activity until the district engineer issues the waiver. If the district or division engineer notifies the permittee in writing that an individual permit is required within 45 calendar days of receipt of a complete PCN, the permittee cannot begin the activity until an individual permit has been obtained. Subsequently, the permittee's right to proceed under the NWP may be modified, suspended, or revoked only in accordance with the procedure set forth in 33 CFR 330.5(d)(2).

(b) Contents of Pre-Construction Notification: The PCN must be in writing and include the following information:

(1) Name, address and telephone numbers of the prospective permittee;

(2) Location of the proposed activity;

(3) Identify the specific NWP or NWP(s) the prospective permittee wants to use to authorize the proposed activity;

(4) (i) A description of the proposed activity; the activity's purpose; direct and indirect adverse environmental effects the activity would cause, including the anticipated amount of loss of wetlands, other special aquatic sites, and other waters expected to result from the NWP activity, in acres, linear feet, or other appropriate unit of measure; a description of any proposed mitigation measures intended to reduce the adverse environmental effects caused by the proposed activity; and any other NWP(s), regional general permit(s), or individual permit(s) used or intended to be used to authorize any part of the proposed project or any related activity, including other separate and distant crossings for linear projects that require Department of the Army authorization but do not require pre-construction notification. The description of the proposed activity and any proposed mitigation measures should be sufficiently detailed to allow the district engineer to determine that the adverse environmental effects of the activity will be no more than minimal and to determine the need for compensatory mitigation or other mitigation measures.

(ii) For linear projects where one or more single and complete crossings require pre-construction notification, the PCN must include the quantity of anticipated losses of wetlands, other special aquatic sites, and other waters for each single and complete crossing of those wetlands, other special aquatic sites, and other waters (including those single and complete crossings authorized by an NWP but do not require PCNs). This information will be used by the district engineer to evaluate the cumulative adverse environmental effects of the proposed linear project and does not change those non-PCN NWP activities into NWP PCNs.

(iii) Sketches should be provided when necessary to show that the activity complies with the terms of the NWP. (Sketches usually clarify the activity and when provided results in a quicker decision. Sketches should contain sufficient detail to provide an illustrative description of the proposed activity (e.g., a conceptual plan), but do not need to be detailed engineering plans);

(5) The PCN must include a delineation of wetlands, other special aquatic sites, and other waters, such as lakes and ponds, and perennial and intermittent streams, on the project site. Wetland delineations must be prepared in accordance with the current method required by the Corps. The permittee may ask the Corps to delineate the special aquatic sites and other waters on the project site, but there may be a delay if the Corps does the delineation, especially if the project site is large or contains many wetlands, other special aquatic sites, and other waters. Furthermore, the 45-day period will not start until the delineation has been submitted to or completed by the Corps, as appropriate;

(6) If the proposed activity will result in the loss of greater than 1/10-acre of wetlands or 3/100-acre of stream bed and a PCN is required, the prospective permittee must submit a statement describing how the mitigation requirement will be satisfied or explaining why the adverse environmental effects are no more than minimal and why compensatory mitigation should not be required. As an alternative, the prospective permittee may submit a conceptual or detailed mitigation plan.

(7) For non-federal permittees, if any listed species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation) might be affected or is in the vicinity of

the activity, or if the activity is located in designated critical habitat (or critical habitat proposed for such designation), the PCN must include the name(s) of those endangered or threatened species (or species proposed for listing) that might be affected by the proposed activity or utilize the designated critical habitat (or critical habitat proposed for such designation) that might be affected by the proposed activity. For NWP activities that require pre-construction notification, Federal permittees must provide documentation demonstrating compliance with the Endangered Species Act;

(8) For non-federal permittees, if the NWP activity might have the potential to cause effects to a historic property listed on, determined to be eligible for listing on, or potentially eligible for listing on, the National Register of Historic Places, the PCN must state which historic property might have the potential to be affected by the proposed activity or include a vicinity map indicating the location of the historic property. For NWP activities that require pre-construction notification, Federal permittees must provide documentation demonstrating compliance with section 106 of the National Historic Preservation Act;

(9) For an activity that will occur in a component of the National Wild and Scenic River System, or in a river officially designated by Congress as a "study river" for possible inclusion in the system while the river is in an official study status, the PCN must identify the Wild and Scenic River or the "study river" (see general condition 16); and

(10) For an NWP activity that requires permission from, or review by, the Corps pursuant to 33 U.S.C. 408 because it will alter or temporarily or permanently occupy or use a U.S. Army Corps of Engineers federally authorized civil works project, the pre-construction notification must include a statement confirming that the project proponent has submitted a written request for section 408 permission from, or review by, the Corps office having jurisdiction over that USACE project.

(c) Form of Pre-Construction Notification: The nationwide permit pre-construction notification form (Form ENG 6082) should be used for NWP PCNs. A letter containing the required information may also be used. Applicants may provide electronic files of PCNs and supporting materials if the district engineer has established tools and procedures for electronic submittals.

(d) Agency Coordination: (1) The district engineer will consider any comments from Federal and state agencies concerning the proposed activity's compliance with the terms and conditions of the NWPs and the need for mitigation to reduce the activity's adverse environmental effects so that they are no more than minimal.

(2) Agency coordination is required for: (i) all NWP activities that require pre-construction notification and result in the loss of greater than 1/2-acre of waters of the United States; (ii) NWP 13 activities in excess of 500 linear feet, fills greater than one cubic yard per running foot, or involve discharges of dredged or fill material into special aquatic sites; and (iii) NWP 54 activities in excess of 500 linear feet, or that extend into the waterbody more than 30 feet from the mean low water line in tidal waters or the ordinary high water mark in the Great Lakes.

(3) When agency coordination is required, the district engineer will immediately provide (e.g., via e-mail, facsimile transmission, overnight mail, or other expeditious manner) a copy of the complete PCN to the appropriate Federal or state offices (FWS, state natural resource or water quality agency, EPA, and, if appropriate, the NMFS). With the exception of NWP 37, these agencies will have 10 calendar days from the date the material is transmitted to notify the district engineer via telephone, facsimile transmission, or e-mail that they intend to provide substantive, site-specific comments. The comments must explain why the agency believes the adverse environmental effects will be more than minimal. If so, contacted by an agency, the district engineer will wait an additional 15 calendar days before making a decision on the pre-construction notification. The district engineer will fully consider agency comments received within the specified time frame concerning the proposed activity's compliance with the terms and conditions of the NWPs, including the need for mitigation to ensure that the net adverse environmental effects of the proposed activity are no more than minimal. The district engineer will provide no response to the resource agency, except as provided below. The district engineer will indicate in the administrative record associated with each pre-construction notification that the resource agencies' concerns were considered. For NWP 37, the emergency watershed protection and rehabilitation activity may proceed immediately in cases where there is an unacceptable hazard to life, or a significant loss of property or economic hardship will occur. The district engineer will consider any comments received to decide whether the NWP 37 authorization should be modified, suspended, or

revoked in accordance with the procedures at 33 CFR 330.5.

(4) In cases of where the prospective permittee is not a Federal agency, the district engineer will provide a response to NMFS within 30 calendar days of receipt of any Essential Fish Habitat conservation recommendations, as required by section 305(b)(4)(B) of the Magnuson-Stevens Fishery Conservation and Management Act.

(5) Applicants are encouraged to provide the Corps with either electronic files or multiple copies of pre-construction notifications to expedite agency coordination.

District Engineer's Decision

1. In reviewing the PCN for the proposed activity, the district engineer will determine whether the activity authorized by the NWP will result in more than minimal individual or cumulative adverse environmental effects or may be contrary to the public interest. If a project proponent requests authorization by a specific NWP, the district engineer should issue the NWP verification for that activity if it meets the terms and conditions of that NWP, unless he or she determines, after considering mitigation, that the proposed activity will result in more than minimal individual and cumulative adverse effects on the aquatic environment and other aspects of the public interest and exercises discretionary authority to require an individual permit for the proposed activity. For a linear project, this determination will include an evaluation of the single and complete crossings of waters of the United States that require PCNs to determine whether they individually satisfy the terms and conditions of the NWP(s), as well as the cumulative effects caused by all of the crossings of waters of the United States authorized by an NWP. If an applicant requests a waiver of an applicable limit, as provided for in NWPs 13, 36, or 54, the district engineer will only grant the waiver upon a written determination that the NWP activity will result in only minimal individual and cumulative adverse environmental effects.

2. When making minimal adverse environmental effects determinations the district engineer will consider the direct and indirect effects caused by the NWP activity. He or she will also consider the cumulative adverse environmental effects caused by activities authorized by an NWP and whether those cumulative adverse environmental effects are no more than minimal. The district engineer will also consider site specific factors, such as the environmental setting in the vicinity of the NWP activity, the type of resource that will be affected by the NWP activity, the functions provided by the aquatic resources that will be affected by the NWP activity, the degree or magnitude to which the aquatic resources perform those functions, the extent that aquatic resource functions will be lost as a result of the NWP activity (e.g., partial or complete loss), the duration of the adverse effects (temporary or permanent), the importance of the aquatic resource functions to the region (e.g., watershed or ecoregion), and mitigation required by the district engineer. If an appropriate functional or condition assessment method is available and practicable to use, that assessment method may be used by the district engineer to assist in the minimal adverse environmental effects determination. The district engineer may add case-specific special conditions to the NWP authorization to address site-specific environmental concerns.

3. If the proposed activity requires a PCN and will result in a loss of greater than 1/10-acre of wetlands or 3/100-acre of stream bed, the prospective permittee should submit a mitigation proposal with the PCN. Applicants may also propose compensatory mitigation for NWP activities with smaller impacts, or for impacts to other types of waters. The district engineer will consider any proposed compensatory mitigation or other mitigation measures the applicant has included in the proposal in determining whether the net adverse environmental effects of the proposed activity are no more than minimal. The compensatory mitigation proposal may be either conceptual or detailed. If the district engineer determines that the activity complies with the terms and conditions of the NWP and that the adverse environmental effects are no more than minimal, after considering mitigation, the district engineer will notify the permittee and include any activity-specific conditions in the NWP verification the district engineer deems necessary. Conditions for compensatory mitigation requirements must comply with the appropriate provisions at 33 CFR 332.3(k). The district engineer must approve the final mitigation plan before the permittee commences work in waters of the United States, unless the district engineer determines that prior approval of the final mitigation plan is not practicable or not necessary to ensure timely completion of the required compensatory mitigation. If the prospective permittee elects to submit a compensatory mitigation plan with the PCN, the district engineer will expeditiously review the proposed compensatory mitigation plan. The district engineer must review the proposed compensatory mitigation plan within 45

calendar days of receiving a complete PCN and determine whether the proposed mitigation would ensure that the NWP activity results in no more than minimal adverse environmental effects. If the net adverse environmental effects of the NWP activity (after consideration of the mitigation proposal) are determined by the district engineer to be no more than minimal, the district engineer will provide a timely written response to the applicant. The response will state that the NWP activity can proceed under the terms and conditions of the NWP, including any activity-specific conditions added to the NWP authorization by the district engineer.

4. If the district engineer determines that the adverse environmental effects of the proposed activity are more than minimal, then the district engineer will notify the applicant either: (a) that the activity does not qualify for authorization under the NWP and instruct the applicant on the procedures to seek authorization under an individual permit; (b) that the activity is authorized under the NWP subject to the applicant's submission of a mitigation plan that would reduce the adverse environmental effects so that they are no more than minimal; or (c) that the activity is authorized under the NWP with specific modifications or conditions. Where the district engineer determines that mitigation is required to ensure no more than minimal adverse environmental effects, the activity will be authorized within the 45-day PCN period (unless additional time is required to comply with general conditions 18, 20, and/or 31), with activity-specific conditions that state the mitigation requirements. The authorization will include the necessary conceptual or detailed mitigation plan or a requirement that the applicant submit a mitigation plan that would reduce the adverse environmental effects so that they are no more than minimal. When compensatory mitigation is required, no work in waters of the United States may occur until the district engineer has approved a specific mitigation plan or has determined that prior approval of a final mitigation plan is not practicable or not necessary to ensure timely completion of the required compensatory mitigation.

Further Information

1. District engineers have authority to determine if an activity complies with the terms and conditions of an NWP.

2. NWPs do not obviate the need to obtain other federal, state, or local permits, approvals, or authorizations required by law.

3. NWPs do not grant any property rights or exclusive privileges.

4. NWPs do not authorize any injury to the property or rights of others.

5. NWPs do not authorize interference with any existing or proposed Federal project (see general condition 31).

Nationwide Permit Definitions

Best management practices (BMPs): Policies, practices, procedures, or structures implemented to mitigate the adverse environmental effects on surface water quality resulting from development. BMPs are categorized as structural or non-structural.

Compensatory mitigation: The restoration (re-establishment or rehabilitation), establishment (creation), enhancement, and/or in certain circumstances preservation of aquatic resources for the purposes of offsetting unavoidable adverse impacts which remain after all appropriate and practicable avoidance and minimization has been achieved.

Currently serviceable: Useable as is or with some maintenance, but not so degraded as to essentially require reconstruction.

Direct effects: Effects that are caused by the activity and occur at the same time and place.

Discharge: The term "discharge" means any discharge of dredged or fill material into waters of the United States.

Ecological reference: A model used to plan and design an aquatic habitat and riparian area restoration, enhancement, or establishment activity under NWP 27. An ecological reference may be based on the structure, functions, and dynamics of an aquatic habitat type or a riparian area type that currently exists in the region where the proposed NWP 27 activity is located. Alternatively, an ecological reference may be based on a conceptual model for the aquatic habitat type or riparian area type to be restored, enhanced, or established as a result of the proposed NWP 27 activity. An ecological reference takes into account the range of variation of the aquatic habitat type or riparian area type in the region.

Enhancement: The manipulation of the physical, chemical, or biological characteristics of an aquatic

resource to heighten, intensify, or improve a specific aquatic resource function(s). Enhancement results in the gain of selected aquatic resource function(s) but may also lead to a decline in other aquatic resource function(s). Enhancement does not result in a gain in aquatic resource area.

Establishment (creation): The manipulation of the physical, chemical, or biological characteristics present to develop an aquatic resource that did not previously exist at an upland site. Establishment results in a gain in aquatic resource area.

High Tide Line: The line of intersection of the land with the water's surface at the maximum height reached by a rising tide. The high tide line may be determined, in the absence of actual data, by a line of oil or scum along shore objects, a more or less continuous deposit of fine shell or debris on the foreshore or berm, other physical markings or characteristics, vegetation lines, tidal gages, or other suitable means that delineate the general height reached by a rising tide. The line encompasses spring high tides and other high tides that occur with periodic frequency but does not include storm surges in which there is a departure from the normal or predicted reach of the tide due to the piling up of water against a coast by strong winds such as those accompanying a hurricane or other intense storm.

Historic Property: Any prehistoric or historic district, site (including archaeological site), building, structure, or other object included in, or eligible for inclusion in, the National Register of Historic Places maintained by the Secretary of the Interior. This term includes artifacts, records, and remains that are related to and located within such properties. The term includes properties of traditional religious and cultural importance to an Indian tribe or Native Hawaiian organization and that meet the National Register criteria (36 CFR part 60).

Independent utility: A test to determine what constitutes a single and complete non-linear project in the Corps Regulatory Program. A project is considered to have independent utility if it would be constructed absent the construction of other projects in the project area. Portions of a multi-phase project that depend upon other phases of the project do not have independent utility. Phases of a project that would be constructed even if the other phases were not built can be considered as separate single and complete projects with independent utility.

Indirect effects: Effects that are caused by the activity and are later in time or farther removed in distance but are still reasonably foreseeable.

Loss of waters of the United States: Waters of the United States that are permanently adversely affected by filling, flooding, excavation, or drainage because of the regulated activity. The loss of stream bed includes the acres of stream bed that are permanently adversely affected by filling or excavation because of the regulated activity. Permanent adverse effects include permanent discharges of dredged or fill material that change an aquatic area to dry land, increase the bottom elevation of a waterbody, or change the use of a waterbody. The acreage of loss of waters of the United States is a threshold measurement of the impact to jurisdictional waters or wetlands for determining whether a project may qualify for an NWP; it is not a net threshold that is calculated after considering compensatory mitigation that may be used to offset losses of aquatic functions and services. Waters of the United States temporarily filled, flooded, excavated, or drained, but restored to pre-construction contours and elevations after construction, are not included in the measurement of loss of waters of the United States. Impacts resulting from activities that do not require Department of the Army authorization, such as activities eligible for exemptions under section 404(f) of the Clean Water Act, are not considered when calculating the loss of waters of the United States.

Navigable waters: Waters subject to section 10 of the Rivers and Harbors Act of 1899. These waters are defined at 33 CFR part 329.

Non-tidal wetland: A non-tidal wetland is a wetland that is not subject to the ebb and flow of tidal waters. Non-tidal wetlands contiguous to tidal waters are located landward of the high tide line (i.e., spring high tide line).

Open water: For purposes of the NWPs, an open water is any area that in a year with normal patterns of precipitation has water flowing or standing above ground to the extent that an ordinary high water mark can be determined. Aquatic vegetation within the area of flowing or standing water is either non-emergent, sparse, or absent. Vegetated shallows are considered to be open waters. Examples of "open waters" include rivers, streams, lakes, and ponds.

Ordinary High Water Mark: The term ordinary high water mark means that line on the shore established by the fluctuations of water and indicated by physical characteristics such as a clear, natural line impressed

on the bank, shelving, changes in the character of soil, destruction of terrestrial vegetation, the presence of litter and debris, or other appropriate means that consider the characteristics of the surrounding areas.

Perennial stream: A perennial stream has surface water flowing continuously year-round during a typical year.

Practicable: Available and capable of being done after taking into consideration cost, existing technology, and logistics in light of overall project purposes.

Pre-construction notification: A request submitted by the project proponent to the Corps for confirmation that a particular activity is authorized by nationwide permit. The request may be a permit application, letter, or similar document that includes information about the proposed work and its anticipated environmental effects. Pre-construction notification may be required by the terms and conditions of a nationwide permit, or by regional conditions. A pre-construction notification may be voluntarily submitted in cases where pre-construction notification is not required, and the project proponent wants confirmation that the activity is authorized by nationwide permit.

Preservation: The removal of a threat to, or preventing the decline of, aquatic resources by an action in or near those aquatic resources. This term includes activities commonly associated with the protection and maintenance of aquatic resources through the implementation of appropriate legal and physical mechanisms. Preservation does not result in a gain of aquatic resource area or functions.

Re-establishment: The manipulation of the physical, chemical, or biological characteristics of a site with the goal of returning natural/historic functions to a former aquatic resource. Re-establishment results in rebuilding a former aquatic resource and results in a gain in aquatic resource area and functions.

Rehabilitation: The manipulation of the physical, chemical, or biological characteristics of a site with the goal of repairing natural/historic functions to a degraded aquatic resource. Rehabilitation results in a gain in aquatic resource function but does not result in a gain in aquatic resource area.

Restoration: The manipulation of the physical, chemical, or biological characteristics of a site with the goal of returning natural/historic functions to a former or degraded aquatic resource. For the purpose of tracking net gains in aquatic resource area, restoration is divided into two categories: re-establishment and rehabilitation.

Riffle and pool complex: Riffle and pool complexes are special aquatic sites under the 404(b)(1) Guidelines. Riffle and pool complexes sometimes characterize steep gradient sections of streams. Such stream sections are recognizable by their hydraulic characteristics. The rapid movement of water over a course substrate in riffles results in a rough flow, a turbulent surface, and high dissolved oxygen levels in the water. Pools are deeper areas associated with riffles. A slower stream velocity, a streaming flow, a smooth surface, and a finer substrate characterize pools.

Riparian areas: Riparian areas are lands next to streams, lakes, and estuarine-marine shorelines. Riparian areas are transitional between terrestrial and aquatic ecosystems, through which surface and subsurface hydrology connects riverine, lacustrine, estuarine, and marine waters with their adjacent wetlands, non-wetland waters, or uplands. Riparian areas provide a variety of ecological functions and services and help improve or maintain local water quality. (See general condition 23.)

Shellfish seeding: The placement of shellfish seed and/or suitable substrate to increase shellfish production. Shellfish seed consists of immature individual shellfish or individual shellfish attached to shells or shell fragments (i.e., spat on shell). Suitable substrate may consist of shellfish shells, shell fragments, or other appropriate materials placed into waters for shellfish habitat.

Single and complete linear project: A linear project is a project constructed for the purpose of getting people, goods, or services from a point of origin to a terminal point, which often involves multiple crossings of one or more waterbodies at separate and distant locations. The term “single and complete project” is defined as that portion of the total linear project proposed or accomplished by one owner/developer or partnership or other association of owners/developers that includes all crossings of a single water of the United States (i.e., a single waterbody) at a specific location. For linear projects crossing a single or multiple waterbodies several times at separate and distant locations, each crossing is considered a single and complete project for purposes of NWP authorization. However, individual channels in a braided stream or river, or individual arms of a large, irregularly shaped wetland or lake, etc., are not separate waterbodies, and

crossings of such features cannot be considered separately.

Single and complete non-linear project: For non-linear projects, the term "single and complete project" is defined at 33 CFR 330.2(i) as the total project proposed or accomplished by one owner/developer or partnership or other association of owners/developers. A single and complete non-linear project must have independent utility (see definition of "independent utility"). Single and complete non-linear projects may not be "piecemealed" to avoid the limits in an NWP authorization.

Stormwater management: Stormwater management is the mechanism for controlling stormwater runoff for the purposes of reducing downstream erosion, water quality degradation, and flooding and mitigating the adverse effects of changes in land use on the aquatic environment.

Stormwater management facilities: Stormwater management facilities are those facilities, including but not limited to, stormwater retention and detention ponds and best management practices, which retain water for a period of time to control runoff and/or improve the quality (i.e., by reducing the concentration of nutrients, sediments, hazardous substances and other pollutants) of stormwater runoff.

Stream bed: The substrate of the stream channel between the ordinary high water marks. The substrate may be bedrock or inorganic particles that range in size from clay to boulders. Wetlands contiguous to the stream bed, but outside of the ordinary high water marks, are not considered part of the stream bed.

Stream channelization: The manipulation of a stream's course, condition, capacity, or location that causes more than minimal interruption of normal stream processes. A channelized jurisdictional stream remains a water of the United States.

Structure: An object that is arranged in a definite pattern of organization. Examples of structures include, without limitation, any pier, boat dock, boat ramp, wharf, dolphin, weir, boom, breakwater, bulkhead, revetment, riprap, jetty, artificial island, artificial reef, permanent mooring structure, power transmission line, permanently moored floating vessel, piling, aid to navigation, or any other manmade obstacle or obstruction.

Tidal wetland: A tidal wetland is a jurisdictional wetland that is inundated by tidal waters. Tidal waters rise and fall in a predictable and measurable rhythm or cycle due to the gravitational pulls of the moon and sun. Tidal waters end where the rise and fall of the water surface can no longer be practically measured in a predictable rhythm due to masking by other waters, wind, or other effects. Tidal wetlands are located channelward of the high tide line.

Tribal lands: Any lands title to which is either: 1) held in trust by the United States for the benefit of any Indian tribe or individual; or 2) held by any Indian tribe or individual subject to restrictions by the United States against alienation.
Tribal rights: Those rights legally accruing to a tribe or tribes by virtue of inherent sovereign authority, unextinguished aboriginal title, treaty, statute, judicial decisions, executive order or agreement, and that give rise to legally enforceable remedies.

Vegetated shallows: Vegetated shallows are special aquatic sites under the 404(b)(1) Guidelines. They are areas that are permanently inundated and under normal circumstances have rooted aquatic vegetation, such as seagrasses in marine and estuarine systems and a variety of vascular rooted plants in freshwater systems.

Waterbody: For purposes of the NWPs, a waterbody is a "water of the United States." If a wetland is adjacent to a waterbody determined to be a water of the United States, that waterbody and any adjacent wetlands are considered together as a single aquatic unit (see 33 CFR 328.4(c)(2)).

Nationwide Permit No. 46

Discharges in Ditches. Discharges of dredged or fill material into non-tidal ditches that are (1) constructed in uplands, (2) receive water from an area determined to be a water of the United States prior to the construction of the ditch, (3) divert water to an area determined to be a water of the United States prior to the construction of the ditch, and (4) determined to be waters of the United States. The discharge of dredged or fill material must not cause the loss of greater than one acre of waters of the United States.

This NWP does not authorize discharges of dredged or fill material into ditches constructed in streams or other waters of the United States, or in streams that have been relocated in uplands. This NWP does not authorize discharges of dredged or fill material that increase the capacity of the ditch and drain those areas determined to be waters of the United States prior to construction of the ditch.

Notification: The permittee must submit a pre-construction notification to the district engineer prior to commencing the activity. (See general condition 32.) (Authority: Section 404)

2021 Nationwide Permit General Conditions

Note: To qualify for NWP authorization, the prospective permittee must comply with the following general conditions, as applicable, in addition to any regional or case-specific conditions imposed by the division engineer or district engineer. Prospective permittees should contact the appropriate Corps district office to determine if regional conditions have been imposed on an NWP. Prospective permittees should also contact the appropriate Corps district office to determine the status of Clean Water Act Section 401 water quality certification and/or Coastal Zone Management Act consistency for an NWP. Every person who may wish to obtain permit authorization under one or more NWPs, or who is currently relying on an existing or prior permit authorization under one or more NWPs, has been and is on notice that all of the provisions of 33 CFR 330.1 through 330.6 apply to every NWP authorization. Note especially 33 CFR 330.5 relating to the modification, suspension, or revocation of any NWP authorization.

1. Navigation. (a) No activity may cause more than a minimal adverse effect on navigation.

(b) Any safety lights and signals prescribed by the U.S. Coast Guard, through regulations or otherwise, must be installed and maintained at the permittee's expense on authorized facilities in navigable waters of the United States.

(c) The permittee understands and agrees that, if future operations by the United States require the removal, relocation, or other alteration, of the structure or work herein authorized, or if, in the opinion of the Secretary of the Army or his or her authorized representative, said structure or work shall cause unreasonable obstruction to the free navigation of the navigable waters, the permittee will be required, upon due notice from the Corps of Engineers, to remove, relocate, or alter the structural work or obstructions caused thereby, without expense to the United States. No claim shall be made against the United States on account of any such removal or alteration.

2. Aquatic Life Movements. No activity may substantially disrupt the necessary life cycle movements of those species of aquatic life indigenous to the waterbody, including those species that normally migrate through the area, unless the activity's primary purpose is to impound water. All permanent and temporary crossings of waterbodies shall be suitably culverted, bridged, or otherwise designed and constructed to maintain low flows to sustain the movement of those aquatic species. If a bottomless culvert cannot be used, then the crossing should be designed and constructed to minimize adverse effects to aquatic life movements.

3. Spawning Areas. Activities in spawning areas during spawning seasons must be avoided to the maximum extent practicable. Activities that result in the physical destruction (e.g., through excavation, fill, or downstream smothering by substantial turbidity) of an important spawning area are not authorized.

4. Migratory Bird Breeding Areas. Activities in waters of the United States that serve as breeding areas for migratory birds must be avoided to the maximum extent practicable.

5. Shellfish Beds. No activity may occur in areas of concentrated shellfish populations, unless the activity is directly related to a shellfish harvesting activity authorized by NWPs 4 and 48 or is a shellfish seeding or habitat restoration activity authorized by NWP 27.

6. Suitable Material. No activity may use unsuitable material (e.g., trash, debris, car bodies, asphalt, etc.). Material used for construction or discharged must be

free from toxic pollutants in toxic amounts (see section 307 of the Clean Water Act).

7. Water Supply Intakes. No activity may occur in the proximity of a public water supply intake, except where the activity is for the repair or improvement of public water supply intake structures or adjacent bank stabilization.

8. Adverse Effects From Impoundments. If the activity creates an impoundment of water, adverse effects to the aquatic system due to accelerating the passage of water, and/or restricting its flow must be minimized to the maximum extent practicable.

9. Management of Water Flows. To the maximum extent practicable, the pre-construction course, condition, capacity, and location of open waters must be maintained for each activity, including stream channelization, storm water management activities, and temporary and permanent road crossings, except as provided below. The activity must be constructed to withstand expected high flows. The activity must not restrict or impede the passage of normal or high flows, unless the primary purpose of the activity is to impound water or manage high flows. The activity may alter the pre-construction course, condition, capacity, and location of open waters if it benefits the aquatic environment (e.g., stream restoration or relocation activities).

10. Fills Within 100-Year Floodplains. The activity must comply with applicable FEMA-approved state or local floodplain management requirements.

11. Equipment. Heavy equipment working in wetlands or mudflats must be placed on mats, or other measures must be taken to minimize soil disturbance.

12. Soil Erosion and Sediment Controls. Appropriate soil erosion and sediment controls must be used and maintained in effective operating condition during construction, and all exposed soil and other fills, as well as any work below the ordinary high water mark or high tide line, must be permanently stabilized at the earliest practicable date. Permittees are encouraged to perform work within waters of the United States during periods of low-flow or no-flow, or during low tides.

13. Removal of Temporary Structures and Fills. Temporary structures must be removed, to the maximum extent practicable, after their use has been discontinued. Temporary fills must be removed in their entirety and the affected areas returned to pre-construction elevations. The affected areas must be revegetated, as appropriate.

14. Proper Maintenance. Any authorized structure or fill shall be properly maintained, including maintenance to ensure public safety and compliance with applicable NWP general conditions, as well as any activity-specific conditions added by the district engineer to an NWP authorization.

15. Single and Complete Project. The activity must be a single and complete project. The same NWP cannot be used more than once for the same single and complete project.

16. Wild and Scenic Rivers. (a) No NWP activity may occur in a component of the National Wild and Scenic River System, or in a river officially designated by Congress as a "study river" for possible inclusion in the system while the river is in an official study status, unless the appropriate Federal agency with direct management responsibility for such river, has determined in writing that the proposed activity will not adversely affect the Wild and Scenic River designation or study status.

(b) If a proposed NWP activity will occur in a component of the National Wild and Scenic River System, or in a river officially designated by Congress as a "study river" for possible inclusion in the system while the river is in an official study status, the permittee must submit a pre-construction notification (see general condition 32). The district engineer will coordinate the PCN with the Federal agency with direct management responsibility for that river. Permittees shall not begin the NWP activity until notified by the district engineer that the Federal agency with direct management responsibility for that river has determined in writing that the proposed NWP activity will not adversely affect the Wild and Scenic River designation or study status.

(c) Information on Wild and Scenic Rivers may be obtained from the appropriate Federal land management agency responsible for the designated Wild and Scenic River or study river (e.g., National Park Service, U.S. Forest Service, Bureau of Land Management, U.S. Fish and Wildlife Service). Information on these rivers is also available at: http://www.rivers.gov/.

17. Tribal Rights. No activity or its operation may impair reserved tribal rights, including, but not limited to, reserved water rights and treaty fishing and hunting rights.

18. Endangered Species. (a) No activity is authorized under any NWP which is likely to directly or indirectly jeopardize the continued existence of a threatened or endangered species or a species proposed for such designation, as identified under the Federal Endangered Species Act (ESA), or which will directly or indirectly destroy or adversely modify designated critical habitat or critical habitat proposed for such designation. No activity is authorized under any NWP which "may affect" a listed species or critical habitat, unless ESA section 7 consultation addressing the consequences of the proposed activity on listed species or critical habitat has been completed. See 50 CFR 402.02 for the definition of "effects of the action" for the purposes of ESA section 7 consultation, as well as 50 CFR 402.17, which provides further explanation under ESA section 7 regarding "activities that are reasonably certain to occur" and "consequences caused by the proposed action."

(b) Federal agencies should follow their own procedures for complying with the requirements of the ESA (see 33 CFR 330.4(f)(1)). If pre-construction notification is required for the proposed activity, the Federal permittee must provide the district engineer with the appropriate documentation to demonstrate compliance with those requirements. The district engineer will verify that the appropriate documentation has been submitted. If the appropriate documentation has not been submitted, additional ESA section 7 consultation may be necessary for the activity and the respective federal agency would be responsible for fulfilling its obligation under section 7 of the ESA.

(c) Non-federal permittees must submit a pre-construction notification to the district engineer if any listed species (or species proposed for listing) or designated critical habitat (or critical habitat proposed such designation) might be affected or is in the vicinity of the activity, or if the activity is located in designated critical habitat or critical habitat proposed for such designation, and shall not begin work on the activity until notified by the district engineer that the requirements of the ESA have been satisfied and that the activity is authorized. For activities that might affect Federally-listed endangered or threatened species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation), the pre-construction notification must include the name(s) of the endangered or threatened species (or species proposed for listing) that might be affected by the proposed activity or that utilize the designated critical habitat (or critical habitat proposed for such designation) that might be affected by the proposed activity. The district engineer will determine whether the proposed activity "may affect" or will have "no effect" to listed species and designated critical habitat and will notify the non-Federal applicant of the Corps' determination within 45 days of receipt of a complete pre-construction notification. For activities where the non-Federal applicant has identified listed species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation) that might be affected or is in the vicinity of the activity, and has so notified the Corps, the applicant shall not begin work until the Corps has provided notification that the proposed activity will have "no effect" on listed species (or species proposed for listing or designated critical habitat (or critical habitat proposed for such designation), or until ESA section 7 consultation or conference has been completed. If the non-Federal applicant has not heard back from the Corps within 45 days, the applicant must still wait for notification from the Corps.

(d) As a result of formal or informal consultation or conference with the FWS or NMFS the district engineer may add species-specific permit conditions to the NWPs.

(e) Authorization of an activity by an NWP does not authorize the "take" of a threatened or endangered species as defined under the ESA. In the absence of separate authorization (e.g., an ESA Section 10 Permit, a Biological Opinion with "incidental take" provisions, etc.) from the FWS or the NMFS, the Endangered Species Act prohibits any person subject to the jurisdiction of the United States to take a listed species, where "take" means to harass, harm, pursue, hunt, shoot, wound, kill, trap, capture, or collect, or to attempt to engage in any such conduct. The word "harm" in the definition of "take" means an act which actually kills or injures wildlife. Such an act may include significant habitat modification or degradation where it actually kills or injures wildlife by significantly impairing essential behavioral patterns, including breeding, feeding or sheltering.

(f) If the non-federal permittee has a valid ESA section 10(a)(1)(B) incidental take permit with an approved Habitat Conservation Plan for a project or a group of projects that includes the proposed NWP activity, the non-federal applicant should provide a copy of that ESA section 10(a)(1)(B) permit with the PCN required by paragraph (c) of this general condition. The district engineer will coordinate with the agency that issued the ESA section 10(a)(1)(B) permit to determine whether the proposed NWP

activity and the associated incidental take were considered in the internal ESA section 7 consultation conducted for the ESA section 10(a)(1)(B) permit. If that coordination results in concurrence from the agency that the proposed NWP activity and the associated incidental take were considered in the internal ESA section 7 consultation for the ESA section 10(a)(1)(B) permit, the district engineer does not need to conduct a separate ESA section 7 consultation for the proposed NWP activity. The district engineer will notify the non-federal applicant within 45 days of receipt of a complete pre-construction notification whether the ESA section 10(a)(1)(B) permit covers the proposed NWP activity or whether additional ESA section 7 consultation is required.

(g) Information on the location of threatened and endangered species and their critical habitat can be obtained directly from the offices of the FWS and NMFS or their world wide web pages at http://www.fws.gov/ or http://www.fws.gov/ipac and http://www.nmfs.noaa.gov/pr/species/esa/ respectively.

19. Migratory Birds and Bald and Golden Eagles. The permittee is responsible for ensuring that an action authorized by an NWP complies with the Migratory Bird Treaty Act and the Bald and Golden Eagle Protection Act. The permittee is responsible for contacting the appropriate local office of the U.S. Fish and Wildlife Service to determine what measures, if any, are necessary or appropriate to reduce adverse effects to migratory birds or eagles, including whether "incidental take" permits are necessary and available under the Migratory Bird Treaty Act or Bald and Golden Eagle Protection Act for a particular activity.

20. Historic Properties. (a) No activity is authorized under any NWP which may have the potential to cause effects to properties listed, or eligible for listing, in the National Register of Historic Places until the requirements of Section 106 of the National Historic Preservation Act (NHPA) have been satisfied.

(b) Federal permittees should follow their own procedures for complying with the requirements of section 106 of the National Historic Preservation Act (see 33 CFR 330.4(g)(1)). If pre-construction notification is required for the proposed NWP activity, the Federal permittee must provide the district engineer with the appropriate documentation to demonstrate compliance with those requirements. The district engineer will verify that the appropriate documentation has been submitted. If the appropriate documentation is not submitted, then additional consultation under section 106 may be necessary. The respective federal agency is responsible for fulfilling its obligation to comply with section 106.

(c) Non-federal permittees must submit a pre-construction notification to the district engineer if the NWP activity might have the potential to cause effects to any historic properties listed on, determined to be eligible for listing on, or potentially eligible for listing on the National Register of Historic Places, including previously unidentified properties. For such activities, the pre-construction notification must state which historic properties might have the potential to be affected by the proposed NWP activity or include a vicinity map indicating the location of the historic properties or the potential for the presence of historic properties. Assistance regarding information on the location of, or potential for, the presence of historic properties can be sought from the State Historic Preservation Officer, Tribal Historic Preservation Officer, or designated tribal representative, as appropriate, and the National Register of Historic Places (see 33 CFR 330.4(g)). When reviewing pre-construction notifications, district engineers will comply with the current procedures for addressing the requirements of section 106 of the National Historic Preservation Act. The district engineer shall make a reasonable and good faith effort to carry out appropriate identification efforts commensurate with potential impacts, which may include background research, consultation, oral history interviews, sample field investigation, and/or field survey. Based on the information submitted in the PCN and these identification efforts, the district engineer shall determine whether the proposed NWP activity has the potential to cause effects on the historic properties. Section 106 consultation is not required when the district engineer determines that the activity does not have the potential to cause effects on historic properties (see 36 CFR 800.3(a)). Section 106 consultation is required when the district engineer determines that the activity has the potential to cause effects on historic properties. The district engineer will conduct consultation with consulting parties identified under 36 CFR 800.2(c) when he or she makes any of the following effect determinations for the purposes of section 106 of the NHPA: no historic properties affected, no adverse effect, or adverse effect.

(d) Where the non-Federal applicant has identified historic properties on which the proposed NWP activity might have the potential to cause effects and has so notified the Corps, the non-Federal applicant

shall not begin the activity until notified by the district engineer either that the activity has no potential to cause effects to historic properties or that NHPA section 106 consultation has been completed. For non-federal permittees, the district engineer will notify the prospective permittee within 45 days of receipt of a complete pre-construction notification whether NHPA section 106 consultation is required. If NHPA section 106 consultation is required, the district engineer will notify the non-Federal applicant that he or she cannot begin the activity until section 106 consultation is completed. If the non-Federal applicant has not heard back from the Corps within 45 days, the applicant must still wait for notification from the Corps.

(e) Prospective permittees should be aware that section 110k of the NHPA (54 U.S.C. 306113) prevents the Corps from granting a permit or other assistance to an applicant who, with intent to avoid the requirements of section 106 of the NHPA, has intentionally significantly adversely affected a historic property to which the permit would relate, or having legal power to prevent it, allowed such significant adverse effect to occur, unless the Corps, after consultation with the Advisory Council on Historic Preservation (ACHP), determines that circumstances justify granting such assistance despite the adverse effect created or permitted by the applicant. If circumstances justify granting the assistance, the Corps is required to notify the ACHP and provide documentation specifying the circumstances, the degree of damage to the integrity of any historic properties affected, and proposed mitigation. This documentation must include any views obtained from the applicant, SHPO/THPO, appropriate Indian tribes if the undertaking occurs on or affects historic properties on tribal lands or affects properties of interest to those tribes, and other parties known to have a legitimate interest in the impacts to the permitted activity on historic properties.

21. Discovery of Previously Unknown Remains and Artifacts. Permittees that discover any previously unknown historic, cultural, or archeological remains and artifacts while accomplishing the activity authorized by an NWP, they must immediately notify the district engineer of what they have found, and to the maximum extent practicable, avoid construction activities that may affect the remains and artifacts until the required coordination has been completed. The district engineer will initiate the Federal, Tribal, and state coordination required to determine if the items or remains warrant a recovery effort or if the site is eligible for listing in the National Register of Historic Places.

22. Designated Critical Resource Waters. Critical resource waters include, NOAA-managed marine sanctuaries and marine monuments, and National Estuarine Research Reserves. The district engineer may designate, after notice and opportunity for public comment, additional waters officially designated by a state as having particular environmental or ecological significance, such as outstanding national resource waters or state natural heritage sites. The district engineer may also designate additional critical resource waters after notice and opportunity for public comment.

(a) Discharges of dredged or fill material into waters of the United States are not authorized by NWPs 7, 12, 14, 16, 17, 21, 29, 31, 35, 39, 40, 42, 43, 44, 49, 50, 51, 52, 57 and 58 for any activity within, or directly affecting, critical resource waters, including wetlands adjacent to such waters.

(b) For NWPs 3, 8, 10, 13, 15, 18, 19, 22, 23, 25, 27, 28, 30, 33, 34, 36, 37, 38, and 54, notification is required in accordance with general condition 32, for any activity proposed by permittees in the designated critical resource waters including wetlands adjacent to those waters. The district engineer may authorize activities under these NWPs only after she or he determines that the impacts to the critical resource waters will be no more than minimal.

23. Mitigation. The district engineer will consider the following factors when determining appropriate and practicable mitigation necessary to ensure that the individual and cumulative adverse environmental effects are no more than minimal:

(a) The activity must be designed and constructed to avoid and minimize adverse effects, both temporary and permanent, to waters of the United States to the maximum extent practicable at the project site (i.e., on site).

(b) Mitigation in all its forms (avoiding, minimizing, rectifying, reducing, or compensating for resource losses) will be required to the extent necessary to ensure that the individual and cumulative adverse environmental effects are no more than minimal.

(c) Compensatory mitigation at a minimum one-for-one ratio will be required for all wetland losses that exceed 1/10-acre and require pre-construction notification, unless the district engineer determines in writing that either some other form of mitigation would be more environmentally appropriate, or the adverse environmental effects of the proposed activity are no more than minimal and provides an

activity-specific waiver of this requirement. For wetland losses of 1/10-acre or less that require pre-construction notification, the district engineer may determine on a case-by-case basis that compensatory mitigation is required to ensure that the activity results in only minimal adverse environmental effects.

(d) Compensatory mitigation at a minimum one-for-one ratio will be required for all losses of stream bed that exceed 3/100-acre and require pre-construction notification, unless the district engineer determines in writing that either some other form of mitigation would be more environmentally appropriate, or the adverse environmental effects of the proposed activity are no more than minimal and provides an activity-specific waiver of this requirement. This compensatory mitigation requirement may be satisfied through the restoration or enhancement of riparian areas next to streams in accordance with paragraph (e) of this general condition. For losses of stream bed of 3/100-acre or less that require pre-construction notification, the district engineer may determine on a case-by-case basis that compensatory mitigation is required to ensure that the activity results in only minimal adverse environmental effects. Compensatory mitigation for losses of streams should be provided, if practicable, through stream rehabilitation, enhancement, or preservation since streams are difficult-to-replace resources (see 33 CFR 332.3(e)(3)).

(e) Compensatory mitigation plans for NWP activities in or near streams or other open waters will normally include a requirement for the restoration or enhancement, maintenance, and legal protection (e.g., conservation easements) of riparian areas next to open waters. In some cases, the restoration or maintenance/protection of riparian areas may be the only compensatory mitigation required. If restoring riparian areas involves planting vegetation, only native species should be planted. The width of the required riparian area will address documented water quality or aquatic habitat loss concerns. Normally, the riparian area will be 25 to 50 feet wide on each side of the stream, but the district engineer may require slightly wider riparian areas to address documented water quality or habitat loss concerns. If it is not possible to restore or maintain/protect a riparian area on both sides of a stream, or if the waterbody is a lake or coastal waters, then restoring or maintaining/protecting a riparian area along a single bank or shoreline may be sufficient. Where both wetlands and open waters exist on the project site, the district engineer will determine the appropriate compensatory mitigation (e.g., riparian areas and/or wetlands compensation) based on what is best for the aquatic environment on a watershed basis. In cases where riparian areas are determined to be the most appropriate form of minimization or compensatory mitigation, the district engineer may waive or reduce the requirement to provide wetland compensatory mitigation for wetland losses.

(f) Compensatory mitigation projects provided to offset losses of aquatic resources must comply with the applicable provisions of 33 CFR part 332.

(1) The prospective permittee is responsible for proposing an appropriate compensatory mitigation option if compensatory mitigation is necessary to ensure that the activity results in no more than minimal adverse environmental effects. For the NWPs, the preferred mechanism for providing compensatory mitigation is mitigation bank credits or in-lieu fee program credits (see 33 CFR 332.3(b)(2) and (3)). However, if an appropriate number and type of mitigation bank or in-lieu credits are not available at the time the PCN is submitted to the district engineer, the district engineer may approve the use of permittee-responsible mitigation.

(2) The amount of compensatory mitigation required by the district engineer must be sufficient to ensure that the authorized activity results in no more than minimal individual and cumulative adverse environmental effects (see 33 CFR 330.1(e)(3)). (See also 33 CFR 332.3(f).)

(3) Since the likelihood of success is greater and the impacts to potentially valuable uplands are reduced, aquatic resource restoration should be the first compensatory mitigation option considered for permittee-responsible mitigation.

(4) If permittee-responsible mitigation is the proposed option, the prospective permittee is responsible for submitting a mitigation plan. A conceptual or detailed mitigation plan may be used by the district engineer to make the decision on the NWP verification request, but a final mitigation plan that addresses the applicable requirements of 33 CFR 332.4(c)(2) through (14) must be approved by the district engineer before the permittee begins work in waters of the United States, unless the district engineer determines that prior approval of the final mitigation plan is not practicable or not necessary to ensure timely completion of the required compensatory mitigation (see 33 CFR 332.3(k)(3)). If permittee-responsible mitigation is the proposed option, and the proposed compensatory mitigation site is located on land in which another federal

agency holds an easement, the district engineer will coordinate with that federal agency to determine if proposed compensatory mitigation project is compatible with the terms of the easement.

(5) If mitigation bank or in-lieu fee program credits are the proposed option, the mitigation plan needs to address only the baseline conditions at the impact site and the number of credits to be provided (see 33 CFR 332.4(c)(1)(ii)).

(6) Compensatory mitigation requirements (e.g., resource type and amount to be provided as compensatory mitigation, site protection, ecological performance standards, monitoring requirements) may be addressed through conditions added to the NWP authorization, instead of components of a compensatory mitigation plan (see 33 CFR 332.4(c)(1)(ii)).

(g) Compensatory mitigation will not be used to increase the acreage losses allowed by the acreage limits of the NWPs. For example, if an NWP has an acreage limit of 1/2-acre, it cannot be used to authorize any NWP activity resulting in the loss of greater than 1/2-acre of waters of the United States, even if compensatory mitigation is provided that replaces or restores some of the lost waters. However, compensatory mitigation can and should be used, as necessary, to ensure that an NWP activity already meeting the established acreage limits also satisfies the no more than minimal impact requirement for the NWPs.

(h) Permittees may propose the use of mitigation banks, in-lieu fee programs, or permittee-responsible mitigation. When developing a compensatory mitigation proposal, the permittee must consider appropriate and practicable options consistent with the framework at 33 CFR 332.3(b). For activities resulting in the loss of marine or estuarine resources, permittee-responsible mitigation may be environmentally preferable if there are no mitigation banks or in-lieu fee programs in the area that have marine or estuarine credits available for sale or transfer to the permittee. For permittee-responsible mitigation, the special conditions of the NWP verification must clearly indicate the party or parties responsible for the implementation and performance of the compensatory mitigation project, and, if required, its long-term management.

(i) Where certain functions and services of waters of the United States are permanently adversely affected by a regulated activity, such as discharges of dredged or fill material into waters of the United States that will convert a forested or scrub-shrub wetland to a herbaceous wetland in a permanently maintained utility line right-of-way, mitigation may be required to reduce the adverse environmental effects of the activity to the no more than minimal level.

24. Safety of Impoundment Structures. To ensure that all impoundment structures are safely designed, the district engineer may require non-Federal applicants to demonstrate that the structures comply with established state or federal, dam safety criteria or have been designed by qualified persons. The district engineer may also require documentation that the design has been independently reviewed by similarly qualified persons, and appropriate modifications made to ensure safety.

25. Water Quality. (a) Where the certifying authority (state, authorized tribe, or EPA, as appropriate) has not previously certified compliance of an NWP with CWA section 401, a CWA section 401 water quality certification for the proposed discharge must be obtained or waived (see 33 CFR 330.4(c)). If the permittee cannot comply with all of the conditions of a water quality certification previously issued by certifying authority for the issuance of the NWP, then the permittee must obtain a water quality certification or waiver for the proposed discharge in order for the activity to be authorized by an NWP.

(b) If the NWP activity requires pre-construction notification and the certifying authority has not previously certified compliance of an NWP with CWA section 401, the proposed discharge is not authorized by an NWP until water quality certification is obtained or waived. If the certifying authority issues a water quality certification for the proposed discharge, the permittee must submit a copy of the certification to the district engineer. The discharge is not authorized by an NWP until the district engineer has notified the permittee that the water quality certification requirement has been satisfied by the issuance of a water quality certification or a waiver.

(c) The district engineer or certifying authority may require additional water quality management measures to ensure that the authorized activity does not result in more than minimal degradation of water quality.

26. Coastal Zone Management. In coastal states where an NWP has not previously received a state coastal zone management consistency concurrence, an individual state coastal zone management consistency concurrence must be obtained, or a

presumption of concurrence must occur (see 33 CFR 330.4(d)). If the permittee cannot comply with all of the conditions of a coastal zone management consistency concurrence previously issued by the state, then the permittee must obtain an individual coastal zone management consistency concurrence or presumption of concurrence in order for the activity to be authorized by an NWP. The district engineer or a state may require additional measures to ensure that the authorized activity is consistent with state coastal zone management requirements.

27. Regional and Case-By-Case Conditions. The activity must comply with any regional conditions that may have been added by the Division Engineer (see 33 CFR 330.4(e)) and with any case specific conditions added by the Corps or by the state, Indian Tribe, or U.S. EPA in its CWA section 401 Water Quality Certification, or by the state in its Coastal Zone Management Act consistency determination.

28. Use of Multiple Nationwide Permits. The use of more than one NWP for a single and complete project is authorized, subject to the following restrictions:

(a) If only one of the NWPs used to authorize the single and complete project has a specified acreage limit, the acreage loss of waters of the United States cannot exceed the acreage limit of the NWP with the highest specified acreage limit. For example, if a road crossing over tidal waters is constructed under NWP 14, with associated bank stabilization authorized by NWP 13, the maximum acreage loss of waters of the United States for the total project cannot exceed 1/3-acre.

(b) If one or more of the NWPs used to authorize the single and complete project has specified acreage limits, the acreage loss of waters of the United States authorized by those NWPs cannot exceed their respective specified acreage limits. For example, if a commercial development is constructed under NWP 39, and the single and complete project includes the filling of an upland ditch authorized by NWP 46, the maximum acreage loss of waters of the United States for the commercial development under NWP 39 cannot exceed 1/2-acre, and the total acreage loss of waters of United States due to the NWP 39 and 46 activities cannot exceed 1 acre.

29. Transfer of Nationwide Permit Verifications. If the permittee sells the property associated with a nationwide permit verification, the permittee may transfer the nationwide permit verification to the new owner by submitting a letter to the appropriate Corps district office to validate the transfer. A copy of the nationwide permit verification must be attached to the letter, and the letter must contain the following statement and signature:

"When the structures or work authorized by this nationwide permit are still in existence at the time the property is transferred, the terms and conditions of this nationwide permit, including any special conditions, will continue to be binding on the new owner(s) of the property. To validate the transfer of this nationwide permit and the associated liabilities associated with compliance with its terms and conditions, have the transferee sign and date below."

_____

(Transferee)

_____

(Date)

30. Compliance Certification. Each permittee who receives an NWP verification letter from the Corps must provide a signed certification documenting completion of the authorized activity and implementation of any required compensatory mitigation. The success of any required permittee-responsible mitigation, including the achievement of ecological performance standards, will be addressed separately by the district engineer. The Corps will provide the permittee the certification document with the NWP verification letter. The certification document will include:

(a) A statement that the authorized activity was done in accordance with the NWP authorization, including any general, regional, or activity-specific conditions;

(b) A statement that the implementation of any required compensatory mitigation was completed in accordance with the permit conditions. If credits from a mitigation bank or in-lieu fee program are used to satisfy the compensatory mitigation requirements, the certification must include the documentation required by 33 CFR 332.3(l)(3) to confirm that the permittee secured the appropriate number and resource type of credits; and

(c) The signature of the permittee certifying the completion of the activity and mitigation.

The completed certification document must be submitted to the district engineer within 30 days of completion of the authorized activity or the

implementation of any required compensatory mitigation, whichever occurs later.

31. Activities Affecting Structures or Works Built by the United States. If an NWP activity also requires review by, or permission from, the Corps pursuant to 33 U.S.C. 408 because it will alter or temporarily or permanently occupy or use a U.S. Army Corps of Engineers (USACE) federally authorized Civil Works project (a "USACE project"), the prospective permittee must submit a pre-construction notification. See paragraph (b)(10) of general condition 32. An activity that requires section 408 permission and/or review is not authorized by an NWP until the appropriate Corps office issues the section 408 permission or completes its review to alter, occupy, or use the USACE project, and the district engineer issues a written NWP verification.

32. Pre-Construction Notification. (a) Timing. Where required by the terms of the NWP, the prospective permittee must notify the district engineer by submitting a pre-construction notification (PCN) as early as possible. The district engineer must determine if the PCN is complete within 30 calendar days of the date of receipt and, if the PCN is determined to be incomplete, notify the prospective permittee within that 30-day period to request the additional information necessary to make the PCN complete. The request must specify the information needed to make the PCN complete. As a general rule, district engineers will request additional information necessary to make the PCN complete only once. However, if the prospective permittee does not provide all of the requested information, then the district engineer will notify the prospective permittee that the PCN is still incomplete and the PCN review process will not commence until all of the requested information has been received by the district engineer. The prospective permittee shall not begin the activity until either:

(1) He or she is notified in writing by the district engineer that the activity may proceed under the NWP with any special conditions imposed by the district or division engineer; or

(2) 45 calendar days have passed from the district engineer's receipt of the complete PCN, and the prospective permittee has not received written notice from the district or division engineer. However, if the permittee was required to notify the Corps pursuant to general condition 18 that listed species or critical habitat might be affected or are in the vicinity of the activity, or to notify the Corps pursuant to general condition 20 that the activity might have the potential to cause effects to historic properties, the permittee cannot begin the activity until receiving written notification from the Corps that there is "no effect" on listed species or "no potential to cause effects" on historic properties, or that any consultation required under Section 7 of the Endangered Species Act (see 33 CFR 330.4(f)) and/or section 106 of the National Historic Preservation Act (see 33 CFR 330.4(g)) has been completed. If the proposed activity requires a written waiver to exceed specified limits of an NWP, the permittee may not begin the activity until the district engineer issues the waiver. If the district or division engineer notifies the permittee in writing that an individual permit is required within 45 calendar days of receipt of a complete PCN, the permittee cannot begin the activity until an individual permit has been obtained. Subsequently, the permittee's right to proceed under the NWP may be modified, suspended, or revoked only in accordance with the procedure set forth in 33 CFR 330.5(d)(2).

(b) Contents of Pre-Construction Notification: The PCN must be in writing and include the following information:

(1) Name, address and telephone numbers of the prospective permittee;

(2) Location of the proposed activity;

(3) Identify the specific NWP or NWP(s) the prospective permittee wants to use to authorize the proposed activity;

(4) (i) A description of the proposed activity; the activity's purpose; direct and indirect adverse environmental effects the activity would cause, including the anticipated amount of loss of wetlands, other special aquatic sites, and other waters expected to result from the NWP activity, in acres, linear feet, or other appropriate unit of measure; a description of any proposed mitigation measures intended to reduce the adverse environmental effects caused by the proposed activity; and any other NWP(s), regional general permit(s), or individual permit(s) used or intended to be used to authorize any part of the proposed project or any related activity, including other separate and distant crossings for linear projects that require Department of the Army authorization but do not require pre-construction notification. The description of the proposed activity and any proposed mitigation measures should be sufficiently detailed to allow the district engineer to determine that the adverse environmental effects of the activity will be no more than minimal and to determine the need for

compensatory mitigation or other mitigation measures.

(ii) For linear projects where one or more single and complete crossings require pre-construction notification, the PCN must include the quantity of anticipated losses of wetlands, other special aquatic sites, and other waters for each single and complete crossing of those wetlands, other special aquatic sites, and other waters (including those single and complete crossings authorized by an NWP but do not require PCNs). This information will be used by the district engineer to evaluate the cumulative adverse environmental effects of the proposed linear project and does not change those non-PCN NWP activities into NWP PCNs.

(iii) Sketches should be provided when necessary to show that the activity complies with the terms of the NWP. (Sketches usually clarify the activity and when provided results in a quicker decision. Sketches should contain sufficient detail to provide an illustrative description of the proposed activity (e.g., a conceptual plan), but do not need to be detailed engineering plans);

(5) The PCN must include a delineation of wetlands, other special aquatic sites, and other waters, such as lakes and ponds, and perennial and intermittent streams, on the project site. Wetland delineations must be prepared in accordance with the current method required by the Corps. The permittee may ask the Corps to delineate the special aquatic sites and other waters on the project site, but there may be a delay if the Corps does the delineation, especially if the project site is large or contains many wetlands, other special aquatic sites, and other waters. Furthermore, the 45-day period will not start until the delineation has been submitted to or completed by the Corps, as appropriate;

(6) If the proposed activity will result in the loss of greater than 1/10-acre of wetlands or 3/100-acre of stream bed and a PCN is required, the prospective permittee must submit a statement describing how the mitigation requirement will be satisfied or explaining why the adverse environmental effects are no more than minimal and why compensatory mitigation should not be required. As an alternative, the prospective permittee may submit a conceptual or detailed mitigation plan.

(7) For non-federal permittees, if any listed species (or species proposed for listing) or designated critical habitat (or critical habitat proposed for such designation) might be affected or is in the vicinity of the activity, or if the activity is located in designated critical habitat (or critical habitat proposed for such designation), the PCN must include the name(s) of those endangered or threatened species (or species proposed for listing) that might be affected by the proposed activity or utilize the designated critical habitat (or critical habitat proposed for such designation) that might be affected by the proposed activity. For NWP activities that require pre-construction notification, Federal permittees must provide documentation demonstrating compliance with the Endangered Species Act;

(8) For non-federal permittees, if the NWP activity might have the potential to cause effects to a historic property listed on, determined to be eligible for listing on, or potentially eligible for listing on, the National Register of Historic Places, the PCN must state which historic property might have the potential to be affected by the proposed activity or include a vicinity map indicating the location of the historic property. For NWP activities that require pre-construction notification, Federal permittees must provide documentation demonstrating compliance with section 106 of the National Historic Preservation Act;

(9) For an activity that will occur in a component of the National Wild and Scenic River System, or in a river officially designated by Congress as a "study river" for possible inclusion in the system while the river is in an official study status, the PCN must identify the Wild and Scenic River or the "study river" (see general condition 16); and

(10) For an NWP activity that requires permission from, or review by, the Corps pursuant to 33 U.S.C. 408 because it will alter or temporarily or permanently occupy or use a U.S. Army Corps of Engineers federally authorized civil works project, the pre-construction notification must include a statement confirming that the project proponent has submitted a written request for section 408 permission from, or review by, the Corps office having jurisdiction over that USACE project.

(c) Form of Pre-Construction Notification: The nationwide permit pre-construction notification form (Form ENG 6082) should be used for NWP PCNs. A letter containing the required information may also be used. Applicants may provide electronic files of PCNs and supporting materials if the district engineer has established tools and procedures for electronic submittals.

(d) Agency Coordination: (1) The district engineer will consider any comments from Federal and state agencies concerning the proposed activity's compliance with the terms and conditions of the NWPs and the need for mitigation to reduce the activity's adverse environmental effects so that they are no more than minimal.

(2) Agency coordination is required for: (i) all NWP activities that require pre-construction notification and result in the loss of greater than 1/2-acre of waters of the United States; (ii) NWP 13 activities in excess of 500 linear feet, fills greater than one cubic yard per running foot, or involve discharges of dredged or fill material into special aquatic sites; and (iii) NWP 54 activities in excess of 500 linear feet, or that extend into the waterbody more than 30 feet from the mean low water line in tidal waters or the ordinary high water mark in the Great Lakes.

(3) When agency coordination is required, the district engineer will immediately provide (e.g., via e-mail, facsimile transmission, overnight mail, or other expeditious manner) a copy of the complete PCN to the appropriate Federal or state offices (FWS, state natural resource or water quality agency, EPA, and, if appropriate, the NMFS). With the exception of NWP 37, these agencies will have 10 calendar days from the date the material is transmitted to notify the district engineer via telephone, facsimile transmission, or e-mail that they intend to provide substantive, site-specific comments. The comments must explain why the agency believes the adverse environmental effects will be more than minimal. If so, contacted by an agency, the district engineer will wait an additional 15 calendar days before making a decision on the pre-construction notification. The district engineer will fully consider agency comments received within the specified time frame concerning the proposed activity's compliance with the terms and conditions of the NWPs, including the need for mitigation to ensure that the net adverse environmental effects of the proposed activity are no more than minimal. The district engineer will provide no response to the resource agency, except as provided below. The district engineer will indicate in the administrative record associated with each pre-construction notification that the resource agencies' concerns were considered. For NWP 37, the emergency watershed protection and rehabilitation activity may proceed immediately in cases where there is an unacceptable hazard to life, or a significant loss of property or economic hardship will occur. The district engineer will consider any comments received to decide whether the NWP 37 authorization should be modified, suspended, or revoked in accordance with the procedures at 33 CFR 330.5.

(4) In cases of where the prospective permittee is not a Federal agency, the district engineer will provide a response to NMFS within 30 calendar days of receipt of any Essential Fish Habitat conservation recommendations, as required by section 305(b)(4)(B) of the Magnuson-Stevens Fishery Conservation and Management Act.

(5) Applicants are encouraged to provide the Corps with either electronic files or multiple copies of pre-construction notifications to expedite agency coordination.

District Engineer's Decision

1. In reviewing the PCN for the proposed activity, the district engineer will determine whether the activity authorized by the NWP will result in more than minimal individual or cumulative adverse environmental effects or may be contrary to the public interest. If a project proponent requests authorization by a specific NWP, the district engineer should issue the NWP verification for that activity if it meets the terms and conditions of that NWP, unless he or she determines, after considering mitigation, that the proposed activity will result in more than minimal individual and cumulative adverse effects on the aquatic environment and other aspects of the public interest and exercises discretionary authority to require an individual permit for the proposed activity. For a linear project, this determination will include an evaluation of the single and complete crossings of waters of the United States that require PCNs to determine whether they individually satisfy the terms and conditions of the NWP(s), as well as the cumulative effects caused by all of the crossings of waters of the United States authorized by an NWP. If an applicant requests a waiver of an applicable limit, as provided for in NWPs 13, 36, or 54, the district engineer will only grant the waiver upon a written determination that the NWP activity will result in only minimal individual and cumulative adverse environmental effects.

2. When making minimal adverse environmental effects determinations the district engineer will consider the direct and indirect effects caused by the NWP activity. He or she will also consider the cumulative adverse environmental effects caused by activities authorized by an NWP and whether those cumulative adverse environmental effects are no more than minimal. The district engineer will also consider site specific factors, such as the

environmental setting in the vicinity of the NWP activity, the type of resource that will be affected by the NWP activity, the functions provided by the aquatic resources that will be affected by the NWP activity, the degree or magnitude to which the aquatic resources perform those functions, the extent that aquatic resource functions will be lost as a result of the NWP activity (e.g., partial or complete loss), the duration of the adverse effects (temporary or permanent), the importance of the aquatic resource functions to the region (e.g., watershed or ecoregion), and mitigation required by the district engineer. If an appropriate functional or condition assessment method is available and practicable to use, that assessment method may be used by the district engineer to assist in the minimal adverse environmental effects determination. The district engineer may add case-specific special conditions to the NWP authorization to address site-specific environmental concerns.

3. If the proposed activity requires a PCN and will result in a loss of greater than 1/10-acre of wetlands or 3/100-acre of stream bed, the prospective permittee should submit a mitigation proposal with the PCN. Applicants may also propose compensatory mitigation for NWP activities with smaller impacts, or for impacts to other types of waters. The district engineer will consider any proposed compensatory mitigation or other mitigation measures the applicant has included in the proposal in determining whether the net adverse environmental effects of the proposed activity are no more than minimal. The compensatory mitigation proposal may be either conceptual or detailed. If the district engineer determines that the activity complies with the terms and conditions of the NWP and that the adverse environmental effects are no more than minimal, after considering mitigation, the district engineer will notify the permittee and include any activity-specific conditions in the NWP verification the district engineer deems necessary. Conditions for compensatory mitigation requirements must comply with the appropriate provisions at 33 CFR 332.3(k). The district engineer must approve the final mitigation plan before the permittee commences work in waters of the United States, unless the district engineer determines that prior approval of the final mitigation plan is not practicable or not necessary to ensure timely completion of the required compensatory mitigation. If the prospective permittee elects to submit a compensatory mitigation plan with the PCN, the district engineer will expeditiously review the proposed compensatory mitigation plan. The district engineer must review the proposed compensatory mitigation plan within 45 calendar days of receiving a complete PCN and determine whether the proposed mitigation would ensure that the NWP activity results in no more than minimal adverse environmental effects. If the net adverse environmental effects of the NWP activity (after consideration of the mitigation proposal) are determined by the district engineer to be no more than minimal, the district engineer will provide a timely written response to the applicant. The response will state that the NWP activity can proceed under the terms and conditions of the NWP, including any activity-specific conditions added to the NWP authorization by the district engineer.

4. If the district engineer determines that the adverse environmental effects of the proposed activity are more than minimal, then the district engineer will notify the applicant either: (a) that the activity does not qualify for authorization under the NWP and instruct the applicant on the procedures to seek authorization under an individual permit; (b) that the activity is authorized under the NWP subject to the applicant's submission of a mitigation plan that would reduce the adverse environmental effects so that they are no more than minimal; or (c) that the activity is authorized under the NWP with specific modifications or conditions. Where the district engineer determines that mitigation is required to ensure no more than minimal adverse environmental effects, the activity will be authorized within the 45-day PCN period (unless additional time is required to comply with general conditions 18, 20, and/or 31), with activity-specific conditions that state the mitigation requirements. The authorization will include the necessary conceptual or detailed mitigation plan or a requirement that the applicant submit a mitigation plan that would reduce the adverse environmental effects so that they are no more than minimal. When compensatory mitigation is required, no work in waters of the United States may occur until the district engineer has approved a specific mitigation plan or has determined that prior approval of a final mitigation plan is not practicable or not necessary to ensure timely completion of the required compensatory mitigation.

Further Information

1. District engineers have authority to determine if an activity complies with the terms and conditions of an NWP.

2. NWPs do not obviate the need to obtain other federal, state, or local permits, approvals, or authorizations required by law.

3. NWPs do not grant any property rights or exclusive privileges.

4. NWPs do not authorize any injury to the property or rights of others.

5. NWPs do not authorize interference with any existing or proposed Federal project (see general condition 31).

Nationwide Permit Definitions

Best management practices (BMPs): Policies, practices, procedures, or structures implemented to mitigate the adverse environmental effects on surface water quality resulting from development. BMPs are categorized as structural or non-structural.

Compensatory mitigation: The restoration (re-establishment or rehabilitation), establishment (creation), enhancement, and/or in certain circumstances preservation of aquatic resources for the purposes of offsetting unavoidable adverse impacts which remain after all appropriate and practicable avoidance and minimization has been achieved.

Currently serviceable: Useable as is or with some maintenance, but not so degraded as to essentially require reconstruction.

Direct effects: Effects that are caused by the activity and occur at the same time and place.

Discharge: The term "discharge" means any discharge of dredged or fill material into waters of the United States.

Ecological reference: A model used to plan and design an aquatic habitat and riparian area restoration, enhancement, or establishment activity under NWP 27. An ecological reference may be based on the structure, functions, and dynamics of an aquatic habitat type or a riparian area type that currently exists in the region where the proposed NWP 27 activity is located. Alternatively, an ecological reference may be based on a conceptual model for the aquatic habitat type or riparian area type to be restored, enhanced, or established as a result of the proposed NWP 27 activity. An ecological reference takes into account the range of variation of the aquatic habitat type or riparian area type in the region.

Enhancement: The manipulation of the physical, chemical, or biological characteristics of an aquatic resource to heighten, intensify, or improve a specific aquatic resource function(s). Enhancement results in the gain of selected aquatic resource function(s) but may also lead to a decline in other aquatic resource function(s). Enhancement does not result in a gain in aquatic resource area.

Establishment (creation): The manipulation of the physical, chemical, or biological characteristics present to develop an aquatic resource that did not previously exist at an upland site. Establishment results in a gain in aquatic resource area.

High Tide Line: The line of intersection of the land with the water's surface at the maximum height reached by a rising tide. The high tide line may be determined, in the absence of actual data, by a line of oil or scum along shore objects, a more or less continuous deposit of fine shell or debris on the foreshore or berm, other physical markings or characteristics, vegetation lines, tidal gages, or other suitable means that delineate the general height reached by a rising tide. The line encompasses spring high tides and other high tides that occur with periodic frequency but does not include storm surges in which there is a departure from the normal or predicted reach of the tide due to the piling up of water against a coast by strong winds such as those accompanying a hurricane or other intense storm.

Historic Property: Any prehistoric or historic district, site (including archaeological site), building, structure, or other object included in, or eligible for inclusion in, the National Register of Historic Places maintained by the Secretary of the Interior. This term includes artifacts, records, and remains that are related to and located within such properties. The term includes properties of traditional religious and cultural importance to an Indian tribe or Native Hawaiian organization and that meet the National Register criteria (36 CFR part 60).

Independent utility: A test to determine what constitutes a single and complete non-linear project in the Corps Regulatory Program. A project is considered to have independent utility if it would be constructed absent the construction of other projects in the project area. Portions of a multi-phase project that depend upon other phases of the project do not have independent utility. Phases of a project that would be constructed even if the other phases were not built can be considered as separate single and complete projects with independent utility.

Indirect effects: Effects that are caused by the activity and are later in time or farther removed in distance but are still reasonably foreseeable.

Loss of waters of the United States: Waters of the United States that are permanently adversely affected by filling, flooding, excavation, or drainage because of the regulated activity. The loss of stream bed includes the acres of stream bed that are permanently adversely affected by filling or excavation because of the regulated activity. Permanent adverse effects include permanent discharges of dredged or fill material that change an aquatic area to dry land, increase the bottom elevation of a waterbody, or change the use of a waterbody. The acreage of loss of waters of the United States is a threshold measurement of the impact to jurisdictional waters or wetlands for determining whether a project may qualify for an NWP; it is not a net threshold that is calculated after considering compensatory mitigation that may be used to offset losses of aquatic functions and services. Waters of the United States temporarily filled, flooded, excavated, or drained, but restored to pre-construction contours and elevations after construction, are not included in the measurement of loss of waters of the United States. Impacts resulting from activities that do not require Department of the Army authorization, such as activities eligible for exemptions under section 404(f) of the Clean Water Act, are not considered when calculating the loss of waters of the United States.

Navigable waters: Waters subject to section 10 of the Rivers and Harbors Act of 1899. These waters are defined at 33 CFR part 329.

Non-tidal wetland: A non-tidal wetland is a wetland that is not subject to the ebb and flow of tidal waters. Non-tidal wetlands contiguous to tidal waters are located landward of the high tide line (i.e., spring high tide line).

Open water: For purposes of the NWPs, an open water is any area that in a year with normal patterns of precipitation has water flowing or standing above ground to the extent that an ordinary high water mark can be determined. Aquatic vegetation within the area of flowing or standing water is either non-emergent, sparse, or absent. Vegetated shallows are considered to be open waters. Examples of "open waters" include rivers, streams, lakes, and ponds.

Ordinary High Water Mark: The term ordinary high water mark means that line on the shore established by the fluctuations of water and indicated by physical characteristics such as a clear, natural line impressed on the bank, shelving, changes in the character of soil, destruction of terrestrial vegetation, the presence of litter and debris, or other appropriate means that consider the characteristics of the surrounding areas.

Perennial stream: A perennial stream has surface water flowing continuously year-round during a typical year.

Practicable: Available and capable of being done after taking into consideration cost, existing technology, and logistics in light of overall project purposes.

Pre-construction notification: A request submitted by the project proponent to the Corps for confirmation that a particular activity is authorized by nationwide permit. The request may be a permit application, letter, or similar document that includes information about the proposed work and its anticipated environmental effects. Pre-construction notification may be required by the terms and conditions of a nationwide permit, or by regional conditions. A pre-construction notification may be voluntarily submitted in cases where pre-construction notification is not required, and the project proponent wants confirmation that the activity is authorized by nationwide permit.

Preservation: The removal of a threat to, or preventing the decline of, aquatic resources by an action in or near those aquatic resources. This term includes activities commonly associated with the protection and maintenance of aquatic resources through the implementation of appropriate legal and physical mechanisms. Preservation does not result in a gain of aquatic resource area or functions.

Re-establishment: The manipulation of the physical, chemical, or biological characteristics of a site with the goal of returning natural/historic functions to a former aquatic resource. Re-establishment results in rebuilding a former aquatic resource and results in a gain in aquatic resource area and functions.

Rehabilitation: The manipulation of the physical, chemical, or biological characteristics of a site with the goal of repairing natural/historic functions to a degraded aquatic resource. Rehabilitation results in a gain in aquatic resource function but does not result in a gain in aquatic resource area.

Restoration: The manipulation of the physical, chemical, or biological characteristics of a site with the goal of returning natural/historic functions to a former or degraded aquatic resource. For the purpose

of tracking net gains in aquatic resource area, restoration is divided into two categories: re-establishment and rehabilitation.

Riffle and pool complex: Riffle and pool complexes are special aquatic sites under the 404(b)(1) Guidelines. Riffle and pool complexes sometimes characterize steep gradient sections of streams. Such stream sections are recognizable by their hydraulic characteristics. The rapid movement of water over a course substrate in riffles results in a rough flow, a turbulent surface, and high dissolved oxygen levels in the water. Pools are deeper areas associated with riffles. A slower stream velocity, a streaming flow, a smooth surface, and a finer substrate characterize pools.

Riparian areas: Riparian areas are lands next to streams, lakes, and estuarine-marine shorelines. Riparian areas are transitional between terrestrial and aquatic ecosystems, through which surface and subsurface hydrology connects riverine, lacustrine, estuarine, and marine waters with their adjacent wetlands, non-wetland waters, or uplands. Riparian areas provide a variety of ecological functions and services and help improve or maintain local water quality. (See general condition 23.)

Shellfish seeding: The placement of shellfish seed and/or suitable substrate to increase shellfish production. Shellfish seed consists of immature individual shellfish or individual shellfish attached to shells or shell fragments (i.e., spat on shell). Suitable substrate may consist of shellfish shells, shell fragments, or other appropriate materials placed into waters for shellfish habitat.

Single and complete linear project: A linear project is a project constructed for the purpose of getting people, goods, or services from a point of origin to a terminal point, which often involves multiple crossings of one or more waterbodies at separate and distant locations. The term "single and complete project" is defined as that portion of the total linear project proposed or accomplished by one owner/developer or partnership or other association of owners/developers that includes all crossings of a single water of the United States (i.e., a single waterbody) at a specific location. For linear projects crossing a single or multiple waterbodies several times at separate and distant locations, each crossing is considered a single and complete project for purposes of NWP authorization. However, individual channels in a braided stream or river, or individual arms of a large, irregularly shaped wetland or lake, etc., are not separate waterbodies, and crossings of such features cannot be considered separately.

Single and complete non-linear project: For non-linear projects, the term "single and complete project" is defined at 33 CFR 330.2(i) as the total project proposed or accomplished by one owner/developer or partnership or other association of owners/developers. A single and complete non-linear project must have independent utility (see definition of "independent utility"). Single and complete non-linear projects may not be "piecemealed" to avoid the limits in an NWP authorization.

Stormwater management: Stormwater management is the mechanism for controlling stormwater runoff for the purposes of reducing downstream erosion, water quality degradation, and flooding and mitigating the adverse effects of changes in land use on the aquatic environment.

Stormwater management facilities: Stormwater management facilities are those facilities, including but not limited to, stormwater retention and detention ponds and best management practices, which retain water for a period of time to control runoff and/or improve the quality (i.e., by reducing the concentration of nutrients, sediments, hazardous substances and other pollutants) of stormwater runoff.

Stream bed: The substrate of the stream channel between the ordinary high water marks. The substrate may be bedrock or inorganic particles that range in size from clay to boulders. Wetlands contiguous to the stream bed, but outside of the ordinary high water marks, are not considered part of the stream bed.

Stream channelization: The manipulation of a stream's course, condition, capacity, or location that causes more than minimal interruption of normal stream processes. A channelized jurisdictional stream remains a water of the United States.

Structure: An object that is arranged in a definite pattern of organization. Examples of structures include, without limitation, any pier, boat dock, boat ramp, wharf, dolphin, weir, boom, breakwater, bulkhead, revetment, riprap, jetty, artificial island, artificial reef, permanent mooring structure, power transmission line, permanently moored floating vessel, piling, aid to navigation, or any other manmade obstacle or obstruction.

Tidal wetland: A tidal wetland is a jurisdictional wetland that is inundated by tidal waters. Tidal waters rise and fall in a predictable and measurable rhythm or cycle due to the gravitational pulls of the moon and sun. Tidal waters end where the rise and fall of the water surface can no longer be practically measured in a predictable rhythm due to masking by other waters, wind, or other effects. Tidal wetlands are located channelward of the high tide line.

Tribal lands: Any lands title to which is either: 1) held in trust by the United States for the benefit of any Indian tribe or individual; or 2) held by any Indian tribe or individual subject to restrictions by the United States against alienation.
Tribal rights: Those rights legally accruing to a tribe or tribes by virtue of inherent sovereign authority, unextinguished aboriginal title, treaty, statute, judicial decisions, executive order or agreement, and that give rise to legally enforceable remedies.

Vegetated shallows: Vegetated shallows are special aquatic sites under the 404(b)(1) Guidelines. They are areas that are permanently inundated and under normal circumstances have rooted aquatic vegetation, such as seagrasses in marine and estuarine systems and a variety of vascular rooted plants in freshwater systems.

Waterbody: For purposes of the NWPs, a waterbody is a "water of the United States." If a wetland is adjacent to a waterbody determined to be a water of the United States, that waterbody and any adjacent wetlands are considered together as a single aquatic unit (see 33 CFR 328.4(c)(2)).

Missouri Department of Natural Resources

CLEAN WATER ACT SECTION 401 WATER QUALITY CERTIFICATION
2021 GENERAL AND SPECIFIC CONDITIONS

Water Protection Program 10/2021

Division of Environmental Quality PUB2947

Consistent with Section 401 of the Clean Water Act (CWA), 33 U.S.C. § 1341, the Missouri Department of Natural Resources (Department) has designed these precertified conditions to ensure activities carried out in Missouri pursuant to Nationwide Permits (NWPs) authorized by the U.S. Army Corps of Engineers (USACE) will comply with Missouri water quality requirements. Unless otherwise stated, these conditions are in addition to, not a replacement for, any federal requirements or conditions.

The conditions outlined in this programmatic WQC apply to those authorized projects where the project proponent has chosen to accept these conditions instead of pursuing an individual CWA Section 401 Water Quality Certification (WQC) for the following NWPs:

- Only General Conditions apply to projects authorized by NWPs 5, 6, 7, 13, 15, 16, 18, 19, 22, 23, 25, 27, 29, 30, 31, 36, 39, 40, 42, 43, 45, 46, 54, and 59.
- Both General and Specific Conditions apply to projects authorized by NWPs 3, 4, 12, 14, 20, 33, 41, 53, 57, and 58.

Alternatively, a project proponent may apply to the Department for individual WQC if it does not wish to accept the conditions outlined in this document.

NWPs 1, 2, 8, 9, 10, 11, 28, and 35 authorize projects pursuant to Section 10 of the Rivers and Harbors Act of 1899 only. These NWPs do not require CWA Section 401 WQC because they authorize activities which, in the opinion of the USACE, could not reasonably be expected to result in a discharge into waters of the United States. An activity needing only a Section 10 permit may require a WQC if that activity can reasonably be expected to result in any discharge either during construction or operation of the facility. Thus, if the USACE determines the activity is likely to result in a discharge during construction or operation, the Department has discretion to require a WQC for the Section 10 activity. The USACE may advise a Section 10 permit project proponent that it might need a WQC if there is a reasonable expectation that a discharge will occur either during the construction or operation of the project.

Pursuant to Section 644.037, RSMo, the Department shall certify without conditions NWPs as they apply to impacts on wetlands in Missouri. Because NWPs are minimal impact, Missouri does not have water quality standards specific to wetlands, and only the general criteria apply, discharges to wetlands from projects authorized by NWPs will comply with water quality requirements.

Pursuant to Section 644.038, RSMo, the Department shall certify without conditions all NWPs for impacts in all waters of the state for the construction of highways and bridges approved by the Missouri Highway and Transportation Commission. A Memorandum of Understanding between the Missouri Departments of Natural Resources and Transportation contains the requirements by which the Missouri Department of Transportation will design and construct such projects in order to protect the water quality of waters of the state. Therefore, as a result of this side agreement, the Department grants programmatic WQC for all NWPs without conditions for the construction of highways and bridges approved by the Missouri Highway and Transportation Commission, because any discharges from these projects will comply with water quality requirements.

GENERAL CONDITIONS

1. A stream's pattern, profile, and dimension, including but not limited to sinuosity, slope, and channel width, shall be maintained as much as practicable. Streambed gradient shall not be adversely impacted during project construction. No project shall accelerate bed or bank erosion. This will ensure compliance with the Missouri Water Quality Standards general criterion requiring waters to be free from physical, chemical, or hydrologic changes that would impair the natural biological community [10 CSR 20-7.031(4)(H)].

2. Channelization of streams is not allowed under this precertification. Channelization includes but is not limited to reducing the length of the channel, widening the channel for increased water storage or flow, and/or construction of hard structures which concentrate flow. Unless necessary for a stream crossing associated with infrastructure projects and contained within an associated right-of-way, construction easement, or permanent easement, bank stabilization activities only along one bank of a stream are permitted, including but not limited to bank sloping and riprapping. The redirection of flow by excavation of the opposite bank or a streambed is considered a channel modification and is not authorized by this WQC. This will ensure compliance with the Missouri Water Quality Standards general criterion requiring waters to be free from physical, chemical, or hydrologic changes that would impair the natural biological community [10 CSR 20-7.031(4)(H)].

3. No new or expanded wet stormwater retention basins or similar impoundment structures may be constructed unless they are located off-channel. In-channel dry stormwater detention basins are allowable if the stream channel is either temporarily or not adversely affected by the basin. This will ensure compliance with the Missouri Water Quality Standards general criterion requiring waters to be free from physical, chemical, or hydrologic changes that would impair the natural biological community [10 CSR 20-7.031(4)(H)].

4. Only clean, nonpolluting fill shall be used. The following materials are not suitable where contact with water is expected and shall not be used due to their potential to cause violations of the general criteria of Missouri's Water Quality Standards [10 CSR 20-7.031(4)]:
   a. Earthen fill, gravel and broken concrete where the material does not meet the Suitable Material specifications stated in the "Missouri Nationwide Permit Regional Conditions" (https://usace.contentdm.oclc.org/digital/collection/p16021coll11/id/2662/) in locations where erosive flows are expected to occur on a regular basis, such as streambanks and/or lake shorelines.
   b. Asphalt.
   c. Concrete with exposed rebar.
   d. Tires, vehicles or vehicle bodies, and construction or demolition debris are solid waste and are excluded from placement in the waters of the state. Properly sized, broken concrete without exposed rebar is allowed.
   e. Liquid concrete, including grouted riprap, if not placed in forms as part of an engineered structure.
   f. Any material containing chemicals that would result in violation of Missouri Water Quality Standards general criteria [10 CSR 20-7.031(4)] or specific criteria [10 CSR 20-7.031(5)].

5. Waste concrete or concrete rinsate shall be disposed of in a manner that does not result in discharge to any jurisdictional water ways. This will ensure compliance with the Missouri Water Quality Standards general criteria requiring waters be free from unsightly bottom deposits [10 CSR 20-7.031(4)(A)]; substances resulting in toxicity to human, animal, or aquatic life [10 CSR 20-7.031(4)(D)]; and physical, chemical, or hydrologic changes that would impair the natural biological community [10 CSR 20-7.031(4)(H)].

6. Missouri Water Quality Standards antidegradation requirements dictate all appropriate and reasonable Best Management Practices related to erosion and sediment control, project stabilization and prevention of water quality degradation are applied and maintained; for example, preserving vegetation, streambank stability and basic drainage [10 CSR 20-7.031(3)(D)]. Best Management Practices shall be properly installed prior to conducting authorized activities and maintained, repaired and/or replaced as needed during all phases of the project to limit the amount of discharge of water contaminants to waters of the state. The project shall not involve more than normal stormwater or incidental loading of sediment caused by project activities so as to comply with Missouri's general water quality criteria [10 CSR 20-7.031(4)]; https://www.sos.mo.gov/cmsimages/adrules/csr/current/10csr/10c20-7a.pdf

7. Clearing of vegetation and trees shall be the minimum necessary to accomplish the activity except for the removal of invasive or noxious species and placement of ecologically beneficial practices. This will ensure compliance with the Missouri Water Quality Standards antidegradation requirement for Best Management Practices [10 CSR 20-7.031(3)(B)].

8. Care shall be taken to keep machinery out of the water way as much as possible. If work in the water way is unavoidable, it shall be performed in a way that minimizes the duration and amount of any disturbance to banks, substrate and vegetation to prevent increases in turbidity. Fuel, oil and other petroleum products, equipment, construction materials and any solid waste shall not be stored below the ordinary high water mark at any time or in the adjacent flood-prone areas beyond normal working hours. All precautions shall be taken to avoid the release of wastes or fuel to streams and other adjacent waters as a result of this operation. This will ensure compliance with the Missouri Water Quality Standards antidegradation requirement for Best Management Practices [10 CSR 20-7.031(3)(B]) and Missouri Water Quality Standards general criteria requiring waters be free from substances preventing beneficial uses [10 CSR 20-7.031(3)(A)]; substances causing unsightly color or turbidity [10 CSR 20-7.031(4)(C)]; and physical, chemical, or hydrologic changes that would impair the natural biological community [10 CSR 20-7.031(4)(H)].

9. Petroleum products spilled into any water or on the banks where the material may enter waters of the state shall be immediately cleaned up and disposed of properly. Any such spills of petroleum shall be reported as soon as possible, but no later than 24 hours after discovery to the Department of Natural Resources' Environmental Emergency Response number at 573-634-2436 or website at http://dnr.mo.gov/env/esp/esp-eer.htm. This will ensure compliance with Missouri Environmental Improvement Authority to provide for the conservation of state water resources by the prevention of pollution and proper methods of disposal [Section 260.015, RSMo] and Missouri Water Quality Standards general criteria requiring waters be free from substances that prevent maintenance of beneficial uses; cause unsightly bottom deposits, color, turbidity or toxicity; and/or impair the natural biological community [10 CSR 20-7.031(4)(A), -(B), and -(H)].

10. All efforts shall be made to minimize exposure of unprotected soils. To the best of the project proponent's ability, project activity shall be conducted at times of little or no rainfall to limit the amount of overland flow and sediment disturbance caused by heavy equipment. This will ensure compliance with Missouri antidegradation requirements for Best Management Practices [10 CSR 20-7.031(3)(B)].

11. Programmatic WQC is denied for any NWP issued on a water that is listed for a sediment-related impairment, aquatic habitat alteration, channelization, or unknown impairment as listed in the most current Water Quality Report (Section 305(b) Report) at https://dnr.mo.gov/water/what-were-doing/water-planning/quality-standards-impaired-waters-total-maximum-daily-loads/impaired-waters. Although intended to result in minimal impacts, NWP authorizations in these waters may contribute to impairments and result in noncompliance with Missouri's general water quality criteria requiring waters be free from physical, chemical, and hydrologic changes that would impair the natural biological community [10 CSR 20-7.031(4)(H)] or exceedance of Missouri Water Quality Standards specific criteria [10 CSR 20-7.031(5)]. Since WQC General or Specific Conditions cannot be established to address all concerns from the variety of impairments and activities authorized by NWPs, individual review for WQC will be required. Requirements for individual WQC will be determined on a case-by-case basis based on the specific impairments, and additional testing, design, disposal, or BMP considerations may be required.

    To determine the location of the waters noted above, the Department's geospatial data is available upon request, and all published data is available on the Missouri Spatial Data Information Services website at msdis.missouri.edu/. Additional information to identify the project location, including stream reaches with listed impairments or special water designations, may be obtained from the Department's Water Protection Program at 573-522-4502.

12. Programmatic WQC is denied for projects authorized by NWPs 17, 21, 32, 34, 37, 38, 44, 48, 49, 50, 51, 52, 55, and 56. Although intended to result in minimal impacts, these NWPs authorize activities that may contribute to impairments and result in noncompliance with Missouri's general water quality criteria [10 CSR 20-7.031(4)], including the requirement that all waters of the state shall be free from physical, chemical, and hydrologic changes that would impair the natural biological community [10 CSR 20-7.031(4)(H)], or noncompliance with Missouri's specific water quality criteria [10 CSR 20-7.031(5)]. Because programmatic WQC General or Specific Conditions cannot be established to address all concerns from the variety of impairments and activities authorized by these NWPs, the Department requires individual review for WQC for these NWPs. Requirements for individual WQC will be determined on a case-by-case basis based on the specific projects, and additional testing, design, disposal, or BMP considerations may be required.

13. Mitigation for loss of stream resources should be in conformance with the compensatory mitigation guidance currently approved for use in Missouri, including guidance provided by the Missouri Stream Mitigation Method. Stream impacts shall require compensatory mitigation with only instream or riparian corridor credits. Compensatory mitigation shall be within the state of Missouri. This will ensure compliance with the Missouri Water Quality Standards antidegradation requirement for maintenance and protection of designated uses [10 CSR 20-7.031(3)] Mitigation guidance documents can be located online at www.nwk.usace.army.mil/Missions/RegulatoryBranch/StateofMissouri.

SPECIFIC CONDITIONS

14. Nationwide Permit 3 *Maintenance*
    a. Silt, sediment, and debris removal shall be limited to a maximum of 200 LF upstream and 200 LF downstream of structures. This will ensure compliance with the Missouri Water Quality Standards antidegradation requirement for maintenance and protection of designated uses [10 CSR 20-7.031(3)].

15. Nationwide Permit 4 *Fish and Wildlife Harvesting, Enhancement, and Attraction Devices and Activities*
    Any inorganic or extraneous debris, such as may be found on Christmas trees shall be removed to qualify as clean, nonpolluting fill. This will ensure compliance with the Missouri's Water Quality Standards general criteria that waters shall be free from unsightly bottom deposits [10 CSR 20-7.031(4)(A)] and solid waste [10 CSR 20-7.031(4)(I)].

16. Nationwide Permit 12 *Oil and Natural Gas Pipeline Activities*,
    Nationwide Permit 57 *Electric Utility Line and Telecommunications Activities*, and
    Nationwide Permit 58 *Utility Line Activities for Water and Other Substances*
    a. For project crossings that must disturb a water body, work shall be conducted in such a manner as to seal off the work area from flow and minimize sediment transport. Material resulting from the activity shall not be sidecast into waters of the state for more than one month. This will ensure compliance with the Missouri Water Quality Standards antidegradation requirement for Best Management Practices [10 CSR 20-7.031(3)(B) and general criteria requiring waters be free from substances that prevent maintenance of beneficial uses; cause unsightly color, turbidity, or toxicity; and/or impair the natural biological community [10 CSR 20-7.031(4)(B), -(C), and -(H)].
    b. If Horizontal Directional Drilling is used, drilling mud and/or other materials shall not be discharged into waters of the state. Best Management Practices shall be implemented to prevent possible discharges from reaching waters of the state. In the event materials are inadvertently discharged to waters of the state, notification to the Department of Natural Resources is required within 24 hours by calling 573-634-2436. This will ensure compliance with Missouri Water Quality Standards antidegradation requirement for Best Management Practices [10 CSR 20-7.031(3)(B)] and Missouri Environmental Improvement Authority [Section 260.015, RSMo] to provide for the conservation of state air, land and water resources by the prevention of pollution and proper methods of disposal.
    c. Project crossings shall be placed as close to perpendicular as possible and shall be limited to a maximum crossing length of no more than one and one-half times the width of the stream. This will ensure compliance with the Missouri antidegradation requirement for maintenance and protection of designated uses [10 CSR 20-7.031(3)] and Best Management Practices [10 CSR 20-7.031(3)(B)].

17. Nationwide Permit 14 *Linear Transportation Projects*
    a. The permittee shall propose and employ measures to mitigate the removal of impounded sediment (e.g., sand, gravel) in the unstable area upstream of a proposed project to prevent it from being transported downstream and/or construct a notched weir to slow the release of impounded sediment from upstream of the proposed project. This will ensure compliance with the Missouri Water Quality Standards general criteria requiring waters be free from substances causing unsightly color or turbidity [10 CSR 20-7.031(4)(C)] and physical chemical, or hydrologic changes that would impair the natural biological community [10 CSR 20-7.031(4)(H)]. Accumulated gravel may be allowed to naturally deposit into downstream plunge pool voids. Consultation with a hydrologist or other scientist is recommended if the amount of accumulated unconsolidated gravel exceeds the volume of plunge pool voids.
    b. Where this NWP is used to authorize bridge and culvert structures, stream channel work shall be limited to a maximum of 200 feet upstream and a maximum of 200 feet downstream of the bridge or culvert. For purposes of this condition, a channel modification is any activity that alters the width, depth, length and/or sinuosity of a water way. This will ensure compliance with the Missouri antidegradation requirement for maintenance and protection of designated uses [10 CSR 20-7.031(3)] and the Missouri Water Quality Standards general criterion requiring waters be free from physical, chemical, or hydrologic changes that would impair the natural biological community [10 CSR 20-7.031(4)(H)].

18. Nationwide Permit 20 *Response Operations for Oil and Hazardous Substances*
    Oil and hazardous substance releases shall be reported to the Department of Natural Resources' Environmental Emergency Response number at 573-634-2436. Continue to report updates with regard to the containment and cleanup of releases. This will ensure compliance with Missouri Environmental Improvement Authority [Section 260.015, RSMo] to provide for the conservation of state water resources by the prevention of pollution and proper methods of disposal.

19. Nationwide Permit 33 *Temporary Construction, Access and Dewatering*
    a. The use of this NWP shall be limited to impacts of six months or less in duration. This will ensure compliance with the Missouri Water Quality Standards antidegradation requirements for maintenance and protection of designated uses [10 CSR 20-7.031(3)]
    b. Any removal of accumulated sediment (e.g., sand, gravel) upstream of a proposed project shall be limited to the quantity necessary to relieve any obstruction or to protect downstream habitat. The permittee must propose and employ measures to mitigate the removal of impounded sediment in the unstable area upstream of a proposed project to prevent it from being transported downstream and/or construct a notched weir to slow the release of impounded sediment from upstream of the proposed project. This will ensure compliance with the Missouri Water Quality Standards general criteria requiring waters be free from substances causing unsightly color or turbidity [10 CSR 20-7.031(4)(C)] and physical, chemical, or hydrologic changes that would impair the natural biological community [10 CSR 20-7.031(4)(H)].

20. Nationwide Permit 41 *Reshaping Existing Drainage Ditches*
    In-channel disposal of excavated material not used for reshaping activities is prohibited. This will ensure compliance with the Missouri Water Quality Standards antidegradation requirement for Best Management Practices [10 CSR 20-7.031(3)(B) and general criteria requiring waters be free from substances that prevent maintenance of beneficial uses; cause unsightly color, turbidity or toxicity; and/or impair the natural biological community [10 CSR 20-7.031(4)(B), -(C), and -(H)].

21. Nationwide Permit 53 *Removal of Low-Head Dams*
    a. The permittee must propose and employ measures to mitigate the removal of impounded sediment (e.g., sand, gravel) in the unstable area upstream of a proposed project to prevent it from being transported downstream and/or construct a notched weir to slow the release of impounded sediment from upstream of the proposed project. This will ensure compliance with the Missouri Water Quality Standards general criteria requiring waters be free from substances causing unsightly color or turbidity [10 CSR 20-7.031(4)(C)] and physical chemical, or hydrologic changes that would impair the natural biological community [10 CSR 20-7.031(4)(H)]. Accumulated gravel may be allowed to naturally deposit into downstream plunge pool voids. Consultation with a hydrologist or other scientist is recommended if the amount of accumulated unconsolidated gravel exceeds the volume of plunge pool voids.
    b. Stream channel work shall be limited to a maximum of 100 feet upstream and a maximum of 100 feet downstream of the dam. This will ensure compliance with the Missouri Water Quality Standards antidegradation requirement for maintenance and protection of designated uses [10 CSR 20-7.031(3)] and the Missouri Water Quality Standards general criterion requiring waters to be free from physical, chemical, or hydrologic changes that would impair the natural biological community [10 CSR 20-7.031(4)(H)].
    c. Restoration of the stream channel to its former, natural state is authorized. Individual WQC is required for non-natural channel modifications. This will ensure compliance with the Missouri Water Quality Standards general criteria requiring waters be free from physical chemical, or hydrologic changes that would impair the natural biological community [10 CSR 20-7.031(4)(H)]. For purposes of this condition, a channel modification is any activity that alters the width, depth, length and/or sinuosity of a water way.

Unless the Department agrees to an alternative, requests for WQC should be sent electronically to wpsc401cert@dnr.mo.gov [Section 644.026.1(26), RSMo and 10 CSR 20-6.060(5)]. A request for WQC shall include all required information for a complete request for certification in compliance with 40 CFR Part 121. The Department may request additional information prior to providing a WQC decision to ensure Missouri water quality requirements are met, such as a response to comments from the Department, other resource agencies, and/or the public; planned compensatory mitigation; and/or an analysis of practicable alternatives.

An issued WQC, whether programmatically or individually issued, becomes part of and expires with the Section 404 and/or Section 10 permit unless explicitly stated in the WQC.

Acquisition of NWPs and the attendant WQCs shall not be construed or interpreted to imply the requirements for other permits are replaced or superseded, including Clean Water Act Section 402 National Pollutant Discharge Elimination System Permits required under Missouri Clean Water Law [Sections 644.026.1 and 644.051, RSMo] for land disturbance or return water from material deposition. Permits or any other requirements shall remain in effect. Project proponents with questions are encouraged to contact the Department of Natural Resources' regional office in the project area. A regional office map with contact information is located at https://dnr.mo.gov/about-us/division-environmental-quality/regional-office.

Some localities are covered pursuant to Municipal Separate Storm Sewer System Permits with measures to control and possibly treat stormwater. If the project is located within one of these localities, project proponents must comply with all stormwater requirements of the locality's Stormwater Management Plan and any related ordinances. This ensures compliance with CWA Section 402 National Pollutant Discharge Elimination System Permit requirements and the Missouri Clean Water Law [Chapter 644, RSMo].

The Department encourages, but does not require, permittees to consider environmentally-friendly design techniques to include stormwater management strategies that maintain or restore the original site hydrology through infiltration, evaporation, or reuse of stormwater. Designs might include using porous pavement or creating vegetated swales and/or rain gardens. More information can be found at these websites: www.epa.gov/owow/NPS/lid/ and www.lid-stormwater.net/lid_techniques.htm.

The Department encourages the use of native vegetation to protect impacted areas from future water quality concerns. Native vegetation has evolved with Missouri's geology, climate, and wildlife to occur within a region as a result of natural processes rather than human intervention. For areas where direct impacts to streams are to be avoided, the Department recommends a minimum riparian buffer strip width of 50 feet as measured from top of bank.

The Department encourages the use of Horizontal Directional Drilling for stream and wetland crossings when practicable. If properly utilized, Horizontal Directional Drilling is an alternative to more traditional, open-trench methods and can result in significant minimization and/or complete avoidance of aquatic resource impacts.

The following publication provides guidance on how to protect water quality through Best Management Practices on project sites. For more information, please read: "Protecting Water Quality: A field guide to erosion, sediment and stormwater best management practices for development sites in Missouri and Kansas" dated January 2011 and located online at https://dnr.mo.gov/document-search/protecting-water-quality-field-guide.

To help determine if a proposed activity could encounter species or sites of conservation concern within or near a project, including those that have not been recorded, the project proponent is encouraged to visit:

- Missouri Department of Conservation's "Natural Heritage Review" website at https://naturalheritagereview.mdc.mo.gov/.
- U.S. Fish and Wildlife Service's "Information, Planning and Conservation" website at http://ecos.fws.gov/ipac/.

If the proposed project encounters and will potentially affect a species of concern, please promptly report it to the Missouri Department of Conservation and the U.S. Fish and Wildlife Service.

For more information
Missouri Department of Natural Resources
Water Protection Program
P.O. Box 176
Jefferson City, MO 65102-0176
wpsc401cert@dnr.mo.gov
800-361-4827 or 573-522-4502
https://dnr.mo.gov/water
